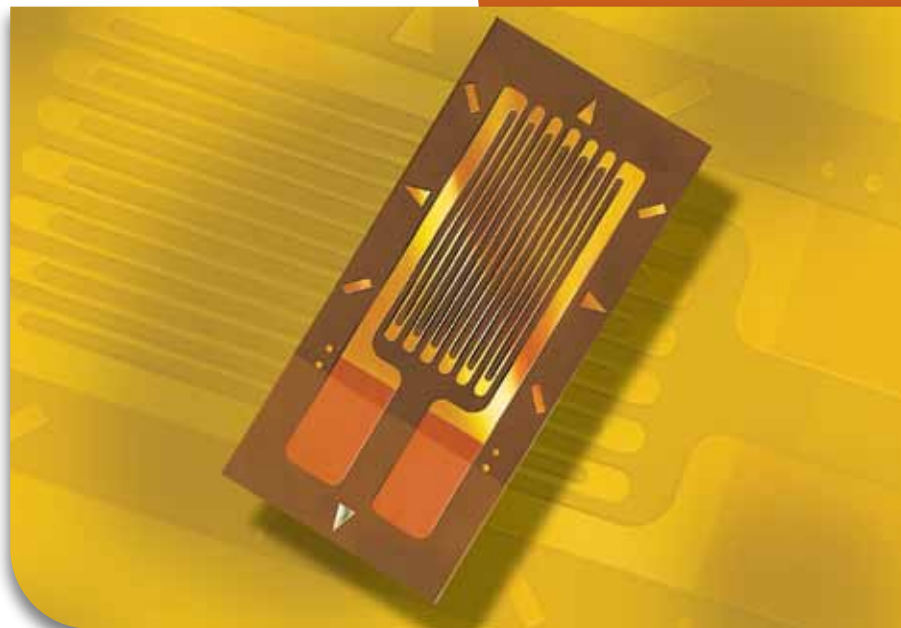




Precision Strain Gages

Micro-Measurements

General Purpose
Special Purpose
Weldable
Temperature Sensors
Residual Stress



INTERACTIVE Data Book
VMM-DB0103-1011

Click on the VPG logo on any datasheet to go to the contents page for that section.

Click on the VPG logo on any contents page to go to the main table of contents page.



The Americas

United States **Vishay Precision Group – Micro-Measurements**
P.O. Box 27777 • Raleigh, NC 27611
Ph: +1-919-365-3800 • Fax: +1-919-365-3945
E-mail: mm.us@vishaypg.com

Asia

P.R. China **Vishay Precision Group – Micro-Measurements**
A8220, Shanghai Jia Hua Business Center
No. 808 Hong Qiao Road • Shanghai 200030
Ph: +86-21-6448-6090, Ext. 6098 • Fax: +86-21-6448-6070
E-mail: mm.cn@vishaypg.com

Europe

France **Vishay Precision Group – Micro-Measurements**
16 Rue Francis Vovelle • 28000 Chartres
Ph: +33-2-37-33-31-20 • Fax: +33-2-37-33-31-29
E-mail: mm.fr@vishaypg.com

Germany **Vishay Precision Group – Micro-Measurements**
Tatschenweg 1 • 74078 Heilbronn
Ph: +49-7131-39099-0 • Fax +49-7131-39099-229
E-mail: mm.de@vishaypg.com

Spain **Vishay Precision Group – Micro-Measurements**
C/Copenhagen, N°4, 6 y 8 - Planta 1^a - Oficina 12 • Edificio Al Andaluz
Polígono Európolis • 28232 Las Rozas, Madrid
Ph: +34-916-407-624 • Fax: +34-916-375-601
E-mail: mm.es@vishaypg.com

United Kingdom **Vishay Precision Group – Micro-Measurements**
Stroudley Road • Basingstoke • Hampshire RG24 8FW
Ph: +44-(0)125-646-2131 • Fax: +44-(0)125-647-1441
E-mail: mm.uk@vishaypg.com

Precision Strain Gages and Sensors

Vishay Precision Group
Micro-Measurements
P.O. Box 27777
Raleigh, NC 27611
U.S.A.
Phone: +1-919-365-3800
Fax: +1-919-365-3945
www.micro-measurements.com

DISCLAIMER

All product specifications and data are subject to change without notice.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay Precision Group"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay Precision Group disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay Precision Group's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay Precision Group.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay Precision Group products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay Precision Group for any damages arising or resulting from such use or sale. Please contact authorized Vishay Precision Group personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

PRECISION STRAIN GAGES	3
General Information	4
Designation System	6
Selection Chart	7
Selection Criteria	9
Strain Gage Dimensions	11
LINEAR PATTERNS	13
015DJ	14
015UW	15
031CE	16
031CF	17
031DE	18
031EC	19
032UW	20
060PB	21
062AK	22
062AP	23
062AQ	24
062DN	25
062ED	26
062EN	27
062LW	28
062UW	29
125AC	30
125AD	31
125BB	32
125BT	33
125BZ	34
125LW	35
125PC	36
125UN	37
125UW	38
187UW	39
250AE	40
250BF	41
250BG	42
250BK	43
250LW	44
250PD	45
250UN	46
250UW	47
375UW	48
500BH	49
500UW	50
10CBE	51
20CBW	52
20CLW	53
Other Linear Patterns	54
TEE ROSETTES	61
050TG	62
062LT	63
062TJ	64
062TT	65
062TZ	66
062UT	67
062WT	68
120WT	69
125LT	70
125TG	71
125TM	72
125UT	73

Table of Contents

125WT	74
250UT	75
Other Tee Rosettes	76
RECTANGULAR ROSETTES	81
031RB	82
031WW	83
060WR	84
062LR	85
062UR	86
062WW	87
120WR	88
125LR	89
125RA	90
125UR	91
125WW	92
250LR	93
250UR	94
250WW	95
Other Rectangular Rosettes	96
DELTA ROSETTES	99
Other Delta Rosettes	100
SHEAR/TORQUE ROSETTES	101
062DY	102
062LV	103
062TH	104
062TV	105
062UV	106
125TK	107
187UV	108
250US	109
Other Shear/Torque Patterns	110
SR-4 STRAIN GAGES	113
FAE Series	114
SPECIAL USE SENSORS	115
Residual Stress Patterns	116
Magnetic Field Patterns	117
Standard Weldable Patterns	118
Sealed Weldable Patterns	120
High-Temperature Weldable Patterns	122
High-Temperature Patterns	124
Shear Modulus Testing Patterns	128
Concrete Embedment Gages	129
Temperature Sensors and LST Networks	130
Manganin Patterns	133
Crack Detection Patterns	135
Crack Propagation Patterns	137
Linear Displacement Sensor	139
Cable-Extension Displacement Sensor	141
STRAIN GAGE ACCESSORIES & INSTRUMENTS	143
Strain Gage Installation	144
Instrument Selection	147
TECHNICAL DATA FOR GENERAL-USE STRAIN GAGES	149
Gage Series - Stress Analysis Gages	150
Optional Features - Stress Analysis Gages	158



General Information.....	4
Designation System	6
Selection Chart.....	7
Selection Criteria	9
Strain Gage Dimensions	11

Precision Strain Gages

HOW TO USE THE LISTINGS

General-use Micro-Measurements strain gages are listed in groups according to grid geometry:

- Linear Patterns
- Tee Rosettes
- Rectangular Rosettes
- Delta Rosettes
- Shear/Torque Patterns

For each of these grid geometries, those patterns most commonly used by our customers are listed first with complete specifications. Additional listings with partial specifications follow for the less commonly used patterns. In both listings, the gage patterns appear in alpha-numeric order, increasing from the shortest grid lengths to the longest.

Some seldom, if ever, ordered patterns listed in previous versions of this databook have been omitted. We will, of course, continue to make these patterns available upon request for customers presently using them. For details, contact the Applications Engineering Department at the Micro-Measurements sales office nearest you.

Separate listings are provided for special-use strain gages and sensors:

- Residual Stress
- Magnetic Fields
- Weldable Gages
- High Temperature Gages
- Manganin Pressure Gages
- Shear Modulus Gages
- Embedment Gages
- Temperature Sensors
- Crack Detection Sensors
- Crack Propagation Sensors
- Displacement Sensors

TRANSDUCER-CLASS® GAGES

Customers whose application requires gages for the manufacture of commercial transducers are strongly encouraged to contact our Transducer Applications Department and request the literature and listings of our Transducer-Class strain gages. This literature includes a selection of gages specifically designed for higher volume applications.

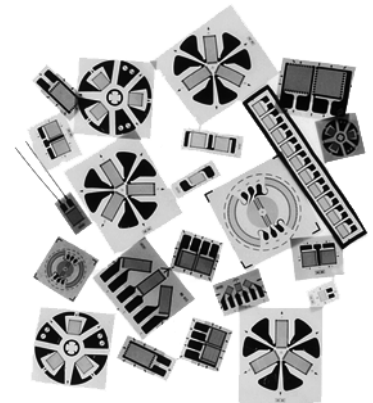


CUSTOM GAGES

Micro-Measurements maintains the most extensive variety of catalog strain gages available today. Whether for stress analysis, transducer manufacturing, or special-purpose applications, we have not only a wide selection, but also a large and varied inventory that is readily available for immediate delivery.

However, many of our customers have applications requiring gages that are manufactured to their individual specifications. While we believe our wide variety of standard catalog gages will satisfy most requirements, we recognize the need for custom products and are committed to serving it well.

To request a quotation for a custom gage, please contact our Applications Engineering Department.



APPLICATIONS SUPPORT

Micro-Measurements maintains an experienced and highly trained applications engineering staff. Our Applications Engineers are as close as your telephone, and we urge you to call them for recommendations in strain gage selection to satisfy your particular test requirements.

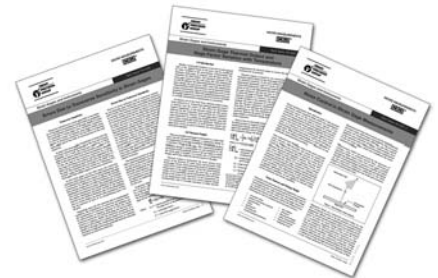


TECHNICAL INFORMATION PROGRAMS

Detailed technical information about the selection and application of strain gages can be found in the special series of Tech Notes, Tech Tips, and Instruction Bulletins on strain gage technology. Thorough familiarity with these publications will help ensure consistent success in the use of Micro-Measurements strain gages.

We also offer our customers an extensive assortment of additional product and technical literature. To register for our direct mail program, please contact our sales office nearest you. For customers with Internet access, our product and technical literature is also available in the strain gage technology knowledge base on our Web site at:

www.micro-measurements.com



STRAIN GAGE ACCESSORIES AND INSTRUMENTATION

In addition to an extensive selection of strain gages, Micro-Measurements offers a complete range of complementary products. Strain gage accessories include surface preparation materials, adhesives, installation tools, protective coatings, leadwire, and a host of other application tools, hardware, and supplies. Instruments range from portable, digital strain indicators, to sophisticated computer-controlled systems for the acquisition, storage, and reduction of test data. Both static and dynamic measuring instruments are available — each uniquely designed to provide stable, accurate, and reliable strain measurement.



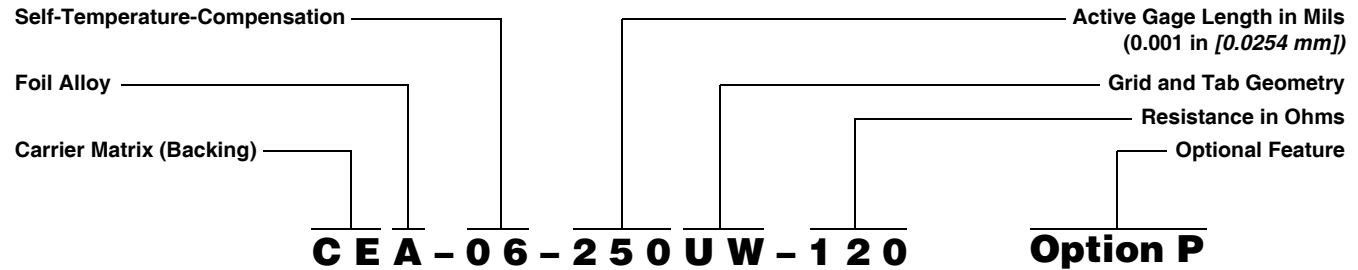
TRAINING PROGRAMS

Training customers in the proper use of strain measurement techniques is an essential part of the Micro-Measurements philosophy. In support of this principle, Micro-Measurements conducts an extensive series of regularly scheduled technical seminars, workshops, and short courses. Course instructors are recognized authorities in their field. Training sessions are conducted at our facilities in the United States and Europe, as well as at hotels and educational institutions around the world.



Stress Analysis Gages

The Strain Gage Designation System described below applies to Micro-Measurements General-Use Strain Gages.



E: Open-faced cast polyimide backing.

CE: Thin, flexible gages with a cast polyimide backing and encapsulation featuring large, rugged, copper-coated solder tabs. This construction provides optimum capability for direct leadwire attachment.

L2: Thin, laminated, polyimide-film backing featuring encapsulated grids with preattached leadwire ribbons.

C2: Thin, laminated, polyimide-film backing featuring encapsulated grids with leadwire cables.

W: Fully encapsulated, glass-fiber-reinforced epoxy phenolic resin. High endurance leadwires.

N2: The 'N2' matrix provides an open faced gage on a thin, high-performance laminated polyimide film backing.

S2: Gage grid and solder tabs fully encapsulated in a thin, flexible, laminated polyimide film. Provided with large (0.030 in [0.75mm]) solder pads for ease of leadwire attachment.

S: Full encapsulation identical to the W matrix, but with solder dot connections instead of leadwires.

A: Constantan alloy in self-temperature-compensated form.

P: Annealed Constantan.

D: Isoelastic alloy.

K: Nickel-chromium alloy (similar to Karma).

The S-T-C number is the approximate thermal expansion coefficient in ppm/°F of the structural material on which the gage is to be used. The following S-T-C numbers are available:

A: 00, 03, 05, 06, 09, 13, 15, 18, 30, 50

P: 08, 40

K: 00, 03, 05, 06, 09, 13, 15

D: Not available in self-temperature-compensated form. 'DY' is used instead.

W: Integral printed circuit terminal, polyimide encapsulation.

E: Polyimide encapsulation, leaving a portion of solder tab exposed.

SE: Solder dots plus polyimide encapsulation.

L: Preattached, soft, formable copper leads.

LE: Leads plus polyimide encapsulation.

P: Preattached leadwire cables and encapsulation.

P2: Preattached leadwire cables for CEA-Series gages.

Standard Strain Gage Series Selection Chart

GAGE SERIES	DESCRIPTION AND PRIMARY APPLICATION	TEMPERATURE RANGE	STRAIN RANGE	FATIGUE LIFE	
				Strain Level in $\mu\epsilon$	Number of Cycles
EA	Constantan foil in combination with a tough, flexible, polyimide backing. Wide range of options available. Primarily intended for general-purpose static and dynamic stress analysis. Not recommended for highest accuracy transducers.	Normal: -100° to $+350^{\circ}\text{F}$ [-75° to $+175^{\circ}\text{C}$] Special or Short Term: -320° to $+400^{\circ}\text{F}$ [-195° to $+205^{\circ}\text{C}$]	$\pm 3\%$ for gage lengths under 1/8 in [3.2 mm] $\pm 5\%$ for 1/8 in and over	± 1800 ± 1500 ± 1200	10^5 10^6 10^8
CEA	Universal general-purpose strain gages. Constantan grid completely encapsulated in polyimide, with large, rugged copper-coated tabs. Primarily used for general-purpose static and dynamic stress analysis.	Normal: -100° to $+350^{\circ}\text{F}$ [-75° to $+175^{\circ}\text{C}$] Stacked rosettes limited to $+150^{\circ}\text{F}$ [$+65^{\circ}\text{C}$]	$\pm 3\%$ for gage lengths under 1/8 in [3.2 mm] $\pm 5\%$ for 1/8 in and over	± 1500 ± 1500	10^5 10^6 *Fatigue life improved using low-modulus solder.
C2A	General-purpose stress analysis strain gages. Supplied with preattached cables for direct connection to instrumentation.	-60° to $+180^{\circ}\text{F}$ [-50° to $+80^{\circ}\text{C}$]	$\pm 3\%$	± 1700 ± 1500	10^5 10^6
L2A	General-purpose stress analysis strain gages. Supplied with preattached leadwire ribbons.	-100° to $+250^{\circ}\text{F}$ [-75° to $+120^{\circ}\text{C}$]	$\pm 3\%$	± 1700 ± 1500	10^5 10^6
N2A	Open-faced constantan foil gages with a thin, laminated, polyimide-film backing. Primarily recommended for use in precision transducers, the N2A Series is characterized by low and repeatable creep performance. Also recommended for stress analysis applications employing large gage patterns, where the especially flat matrix eases gage installation.	Normal Static Transducer Service: -100° to $+200^{\circ}\text{F}$ [-75° to $+95^{\circ}\text{C}$]	$\pm 3\%$	± 1700 ± 1500	10^6 10^7
WA	Fully encapsulated constantan gages with high-endurance leadwires. Useful over wider temperature ranges and in more extreme environments than EA Series. Option W available on some patterns, but restricts fatigue life to some extent.	Normal: -100° to $+400^{\circ}\text{F}$ [-75° to $+205^{\circ}\text{C}$] Special or Short Term: -320° to $+500^{\circ}\text{F}$ [-195° to $+260^{\circ}\text{C}$]	$\pm 2\%$	± 2000 ± 1800 ± 1500	10^5 10^6 10^7
SA	Fully encapsulated constantan gages with solder dots. Same matrix as WA Series. Same uses as WA Series but derated somewhat in maximum temperature and operating environment because of solder dots.	Normal: -100° to $+400^{\circ}\text{F}$ [-75° to $+205^{\circ}\text{C}$] Special or Short-Term: -320° to $+450^{\circ}\text{F}$ [-195° to $+230^{\circ}\text{C}$]	$\pm 2\%$	± 1800 ± 1500	10^6 10^7
EP	Specially annealed constantan foil with tough, high-elongation polyimide backing. Used primarily for measurements of large post-yield strains. Available with Options E, L, and LE (may restrict elongation capability).	-100° to $+400^{\circ}\text{F}$ [-75° to $+205^{\circ}\text{C}$]	$\pm 10\%$ for gage lengths under 1/8 in [3.2 mm] $\pm 20\%$ for 1/8 in and over	± 1000	10^4 EP gages show zero shift under high-cyclic strains.
ED	Isoelastic foil in combination with tough, flexible polyimide film. High gage factor and extended fatigue life excellent for dynamic measurements. Not normally used in static measurements due to very high thermal-output characteristics.	Dynamic: -320° to $+400^{\circ}\text{F}$ [-195° to $+205^{\circ}\text{C}$]	$\pm 2\%$ Nonlinear at strain levels over $\pm 0.5\%$	± 2500 ± 2200	10^6 10^7

Standard Strain Gage Series Selection Chart

GAGE SERIES	DESCRIPTION AND PRIMARY APPLICATION	TEMPERATURE RANGE	STRAIN RANGE	FATIGUE LIFE	
				Strain Level in $\mu\epsilon$	Number of Cycles
WD	Fully encapsulated isoelastic gages with high-endurance leadwires. Used in wide-range dynamic strain measurement applications in severe environments.	Dynamic: -320° to +500°F [-195° to +260°C]	±1.5% Nonlinear at strain levels over ±0.5%	±3000 ±2500 ±2200	10 ⁵ 10 ⁷ 10 ⁸
SD	Equivalent to WD Series, but with solder dots instead of leadwires.	Dynamic: -320° to +400°F [-195° to +205°C]	±1.5% See above note	±2500 ±2200	10 ⁶ 10 ⁷
EK	K-alloy foil in combination with a tough, flexible polyimide backing. Primarily used where a combination of higher grid resistances, stability at elevated temperature, and greatest backing flexibility are required. Supplied with Option DP.	Normal: -320° to +350°F [-195° to +175°C] Special or Short-Term: -452° to +400°F [-269° to +205°C]	±1.5%	±1800	10 ⁷
WK	Fully encapsulated K-alloy gages with high-endurance leadwires. Widest temperature range and most extreme environmental capability of any general-purpose gage when self-temperature compensation is required. Option W available on some patterns, but restricts both fatigue life and maximum operating temperature.	Normal: -452° to +550°F [-269° to +290°C] Special or Short Term: -452° to +750°F [-269° to +400°C]	±1.5%	±2200 ±2000	10 ⁶ 10 ⁷
SK	Fully encapsulated K-alloy gages with solder dots. Same uses as WK Series, but derated in maximum temperature and operating environment because of solder dots.	Normal: -452° to +450°F [-269° to +230°C] Special or Short-Term: -452° to +500°F [-269° to +260°C]	±1.5%	±2200 ±2000	10 ⁶ 10 ⁷
S2K	K-alloy foil laminated to 0.001 in [0.025 mm] thick, high-performance polyimide backing, with a laminated polyimide overlay fully encapsulating the grid and solder tabs. Provided with large solder dots for ease of leadwire attachment.	Normal: -100° to +250°F [-75° to +120°C] Special or Short-Term: -300° to +300°F [-185° to +150°C]	±1.5%	±1800 ±1500	10 ⁶ 10 ⁷

The performance data given here are nominal, and apply primarily to gages of 0.125-in [3-mm] gage length or larger. Refer to Gage Series/Optional Feature data sheet for more detailed description and performance specifications.

Stress Analysis Gages

GAGE SELECTION

Many factors, such as test duration, strain range required, and operating temperature, must be considered in selecting the best strain gage/adhesive combination for a given test profile. These factors and others are addressed in Tech Note TN-505, "Strain Gage Selection — Criteria, Procedures, Recommendations."

SELF-TEMPERATURE COMPENSATION (S-T-C)

All gages with XX as the second code group in the gage designation are self-temperature-compensated for use on structural materials with specific thermal expansion

coefficients. The table below lists S-T-C numbers and test specimen materials to which gages are thermally matched.

When ordering, replace the XX code group with the desired S-T-C number, which is the approximate thermal expansion coefficient of the structural material in ppm/°F. The Gage Designation System lists the available S-T-C numbers for specific grid alloys. The 06 and 13 values, available in A and K alloys, are most common and more likely to be in stock. When not otherwise specified, the 06 compensation is shipped.

S-T-C NO.	EXPANSION COEFFICIENTS**		COMMON MATERIAL
	per °F	per °C	
00	0.8	1.4	Invar, Fe-Ni alloy Quartz, fused Titanium Silicate*, polycrystalline
	0.3	0.5	
	0.0	1.4	
03	3.0	5.4	Alumina, fired Molybdenum*, pure Tungsten, pure Zirconium, pure
	2.7	4.9	
	2.4	4.3	
	3.1	5.6	
05	5.1	9.2	Glass, Soda-Lime-Silica Stainless Steel, Ferritic (410) Titanium, pure Titanium Alloy, 6Al-4V*
	5.5	9.9	
	4.8	8.6	
	4.9	8.8	
06	6.4	11.5	Beryllium, pure Cast Iron, grey Inconel, Ni-Cr-Fe alloy Inconel X, Ni-Cr-Fe alloy Monel, Ni-Cu alloy Nickel-A, Cu-Zn-Ni alloy Steel alloy, 4340 Steel, Carbon, 1008, 1018* Steel, Stainless, Age Hardenable (17-4PH) Steel, Stainless, Age Hardenable (17-7PH) Steel, Stainless, Age Hardenable (PH15-7Mo)
	6.0	10.8	
	7.0	12.6	
	6.7	12.1	
	7.5	13.5	
	6.6	11.9	
	6.3	11.3	
	6.7	12.1	
	6.0	10.8	
	5.7	10.3	
5.0	9.0		
09	9.3	16.7	Beryllium Copper, Cu 75, BE 25 Bronze, Phosphor, Cu 90, Sn 10 Copper, pure Steel, Stainless, Austenitic (304*) Steel, Stainless, Austenitic (310) Steel, Stainless, Austenitic (316)
	10.2	18.4	
	9.2	16.5	
	9.6	17.3	
	8.0	14.4	
	8.9	16.0	
13	12.9	23.2	Aluminum Alloy, 2024-T4*, 7075 T6; Brass, Cartridge, Cu 70-Zn 30; Tin, pure
	11.1	20.0	
	13.0	23.4	
15	14.5	26.1	Magnesium Alloy*, AZ-318

* Indicates type of material used in determining thermal output curves supplied with Micro-Measurements strain gages.
** Nominal values at or near room temperature for temperature coefficient of expansion values.

GAGE RESISTANCE

Micro-Measurements strain gages are available in various resistance values that range from 30 to 5000 ohms.

Strain gages with resistances of 120 and 350 ohms are commonly used in experimental stress analysis testing. For the majority of applications, 120-ohm gages are usually suitable; 350-ohm gages would be preferred to reduce heat generation (for the same applied voltage across the gage), to decrease leadwire effects, or to improve signal-to-noise ratios in the gage circuit. Higher resistance gages are typically used in transducer applications and on composite materials.

GAGE FACTOR

Gage Factor (GF) is the measure of sensitivity, or *output*, produced by a resistance strain gage. Gage factor is determined through calibration of the specific gage type, and is the ratio between $\Delta R/R_0$ and $\Delta L/L$ (strain), where R_0 is the initial unstrained resistance of the gage. It is affected somewhat by pattern size, geometry, S-T-C number, and temperature. Each gage package is supplied with the GF as well as its tolerance and temperature sensitivity. Nominal gage factors for various alloys are: A = 2.05; K = 2.1; D = 3.2; P = 2.00.

TRANSVERSE SENSITIVITY

All gages are sensitive, to some degree, to strains transverse to the grid direction. The transverse sensitivity factor (K_t) is given with the engineering data supplied with all gage types for which the data is relevant.

STRAIN GAGE ADHESIVE SELECTION

When selecting a strain gage, it is most important to consider the adhesive that will be used to bond the gage, since the adhesive becomes part of the gage system and correspondingly affects the performance of the gage. However, when the interaction of test characteristics becomes too complex for selecting the gage/adhesive combination in a straight forward manner, contact our Applications Engineering Department for recommendations.

Stress Analysis Gages

CUSTOM GAGES

Unusual applications occasionally require a strain gage which is neither listed in the catalog nor available by adding special optional features. Often a custom product can be designed to fit such needs.

Careful consideration is given to the backing, foil, S-T-C, gage length, pattern, resistance and resistance tolerance, operating temperature range, test duration, maximum strain, cyclic endurance, leads, encapsulation, and trim so that the custom gage is designed to properly meet the user's needs.

Examples of custom gages include such features as unusual patterns, special trim dimensions, and nonstandard lead materials or length.

A special part number is normally assigned to each custom gage. Doing so ensures that the correct gage is produced each time it is ordered. A set-up charge and a minimum order will normally apply. For further information contact our Applications Engineering Department.



SUPER STOCK GAGES AND SENSORS

At our facility in Raleigh, North Carolina, we maintain a stock of the most commonly used gages listed in this catalog. These gages are often in stock for immediate delivery. Inventory levels of gages in Super Stock strain gages are revised to reflect changes in gage usage by our customers, and are subject to change from time to time.

RAPID RESPONSE GAGES AND SENSORS

Another group of somewhat less commonly ordered gages and sensors sometimes may also be available from stock. Should either a Super Stock or Rapid Response gage be unavailable from stock, they can be produced to order with specially reduced lead times.

STOCK STATUS

To determine the quantities of all gages and sensors currently available from stock, please contact either our Customer Service Department or our sales representative in your area.

ORDERING REQUIREMENTS

ORDER MULTIPLES

All gages must be ordered in the multiples of the number of pieces per package as shown on the price list. For packages with 5 gages each, for example, the order multiples are 5, 10, 15, etc.

MINIMUM ORDER REQUIREMENTS

Super Stock and Rapid Response Gages & Sensors

If gages on either the Super Stock or Rapid Response list are ordered, a minimum order requirement never applies.

Other Gages & Sensors Available From Stock

If gages other than those on the Super Stock and Rapid Response lists are ordered and are in stock in the ordered quantity, a minimum order requirement never applies.

Other Gages & Sensors Unavailable From Stock

If gages other than those on the Super Stock and Rapid Response lists are ordered and are not available from stock in the ordered quantity, a minimum order requirement applies.

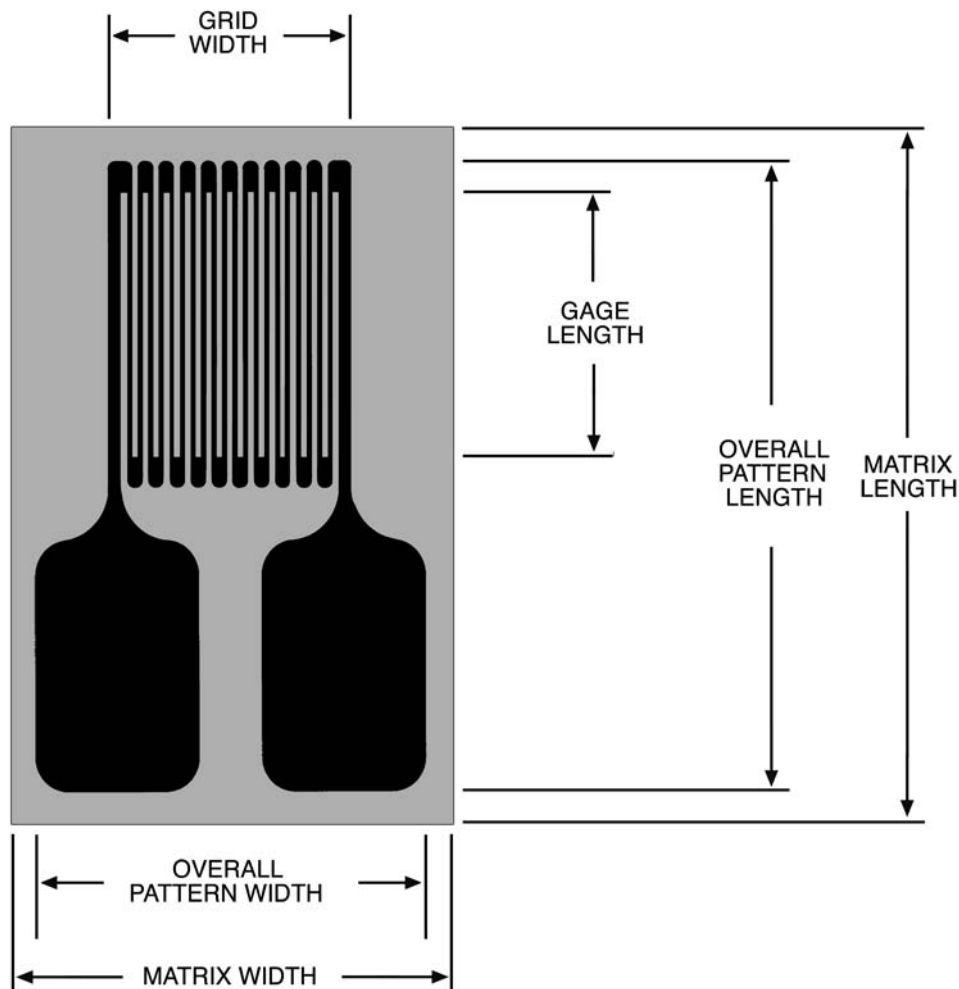
Gages on the Super Stock and Rapid Response lists, as well as those subject to MOR, are subject to change. Please contact our Customer Service Department to determine if an MOR is applicable to your order.

Gage Dimensions

Gage length is an important consideration in strain gage selection, and is usually the first parameter to be defined.

Dimensions listed for gage length (as measured inside the grid endloops) and grid width refer to active grid dimensions. Overall length and width refer to the actual foil pattern, not including alignment marks or backing.

The matrix size represents the approximate dimensions of the backing/matrix of the gage as shipped. Matrix dimensions are nominal, with a usual tolerance of ± 0.015 in [± 0.4 mm]. If the gages are encapsulated, the matrix may be smaller by as much as 0.01 in [0.25 mm]. Most patterns also include trim marks, and, for use in a restricted area, the backing/matrix may be field-trimmed on all sides to within 0.01 in [0.25 mm] of the foil pattern without affecting gage performance.





Linear Patterns (General Use)

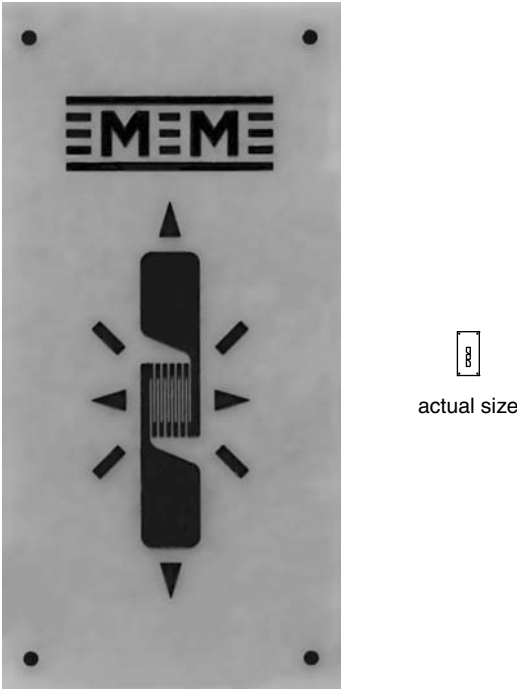
FEATURES

- Gage patterns designed for measuring strain in a single direction
- Single-grid and parallel dual-grid patterns
- Gage lengths from 0.008" (0.20mm) to 4.000" (101.6mm)

Patterns

015DJ	14
015UW	15
031CE	16
031CF	17
031DE	18
031EC	19
032UW	20
060PB	21
062AK	22
062AP	23
062AQ	24
062DN	25
062ED	26
062EN	27
062LW	28
062UW	29
125AC	30
125AD	31
125BB	32
125BT	33
125BZ	34
125LW	35
125PC	36
125UN	37
125UW	38
187UW	39
250AE	40
250BF	41
250BG	42
250BK	43
250LW	44
250PD	45
250UN	46
250UW	47
375UW	48
500BH	49
500UW	50
10CBE	51
20CBW	52
20CLW	53
Other Linear Patterns	54

General Purpose Strain Gages - Linear Pattern

GAGE PATTERN DATA					
			GAGE DESIGNATION See Note 1, 3	RESISTANCE (OHMS) See Note 2	OPTIONS AVAILABLE See Note 3
			EA-XX-015DJ-120 EP-08-015DJ-120 SA-XX-015DJ-120 SK-XX-015DJ-120	120 ± 0.3% 120 ± 0.3% 120 ± 0.6% 120 ± 0.6%	L, LE
DESCRIPTION Micro-miniature pattern with tab at each end of grid. See also 015EH pattern.					
GAGE DIMENSIONS		Legend: ES = Each Section S = Section (S1 = Sec 1)		CP = Complete Pattern M = Matrix	
				<input type="checkbox"/> inch <input checked="" type="checkbox"/> millimeter	
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.015	0.100	0.020	0.020	0.23	0.12
0.38	2.54	0.51	0.51	5.8	3.0

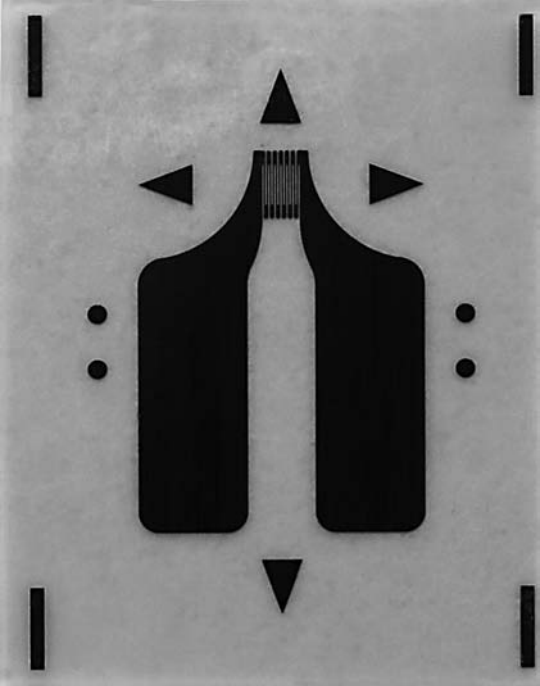

GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
EA	Constantan foil in combination with a tough, flexible, polyimide backing.	±3%	-100° to +350°F [-75° to +175°C]
EP	Annealed constantan foil with tough, high-elongation polyimide backing.	±10%	-100° to +400°F [-75° to +205°C]
SA	Fully encapsulated constantan gages with solder dots.	±2%	-100° to +400°F [-75° to +205°C]
SK	Fully encapsulated K-alloy gages with solder dots.	±1.5%	-452° to +450°F [-269° to +230°C]

Note 1: Insert desired S-T-C number in spaces marked XX.

Note 2: Tolerance is increased when Option W, E, SE, LE, or P is specified.

Note 3: Products with designations and options shown in bold are not RoHS compliant.

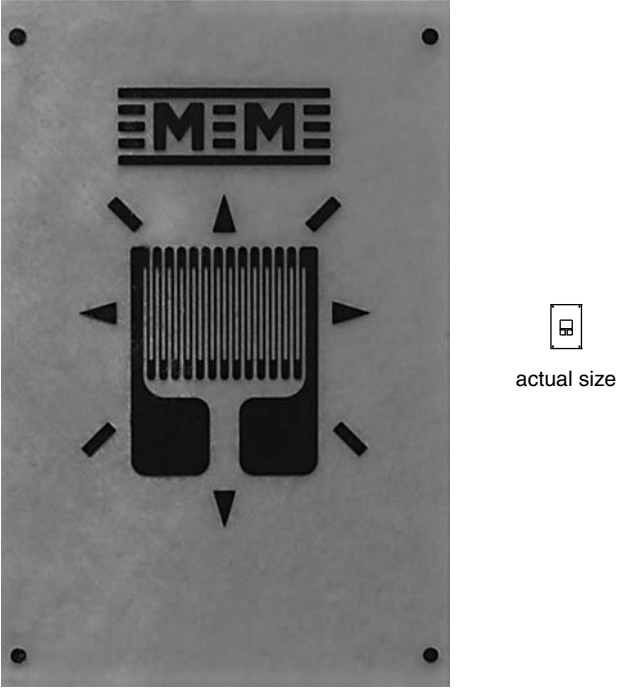
General Purpose Strain Gages - Linear Pattern

GAGE PATTERN DATA					
 <p style="text-align: center;">actual size</p>			GAGE DESIGNATION See Note 1	RESISTANCE (OHMS)	OPTIONS AVAILABLE
			CEA-XX-015UW-120	120 ± 0.3%	
DESCRIPTION Micro-miniature pattern. Exposed solder tab area is 0.06 x 0.04 [1.5 x 1.0 mm]. See also 015CK pattern.					
GAGE DIMENSIONS			Legend: ES = Each Section S = Section (S1 = Sec 1)	CP = Complete Pattern M = Matrix	<input type="checkbox"/> inch <input checked="" type="checkbox"/> millimeter
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.015	0.140	0.020	0.105	0.24	0.18
0.38	3.56	0.51	2.67	6.1	4.6

GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
CEA	Universal general-purpose strain gages.	±3%	-100° to +350°F [-75° to +175°C]

Note 1: Insert desired S-T-C number in spaces marked XX.

General Purpose Strain Gages - Linear Pattern

GAGE PATTERN DATA													
			GAGE DESIGNATION	RESISTANCE (OHMS)	OPTIONS AVAILABLE								
			See Note 1, 3	See Note 2	See Note 3								
			EA-XX-031CE-350 WA-XX-031CE-350 EP-XX-031CE-350 SA-XX-031CE-350	350 ± 0.2% 350 ± 0.4% 350 ± 0.2% 350 ± 0.4%	W, E, L, LE, P								
DESCRIPTION General-purpose high-resistance miniature gage.													
<table style="width: 100%; border: none;"> <tr> <td style="width: 30%;">GAGE DIMENSIONS</td> <td style="width: 30%;">Legend: ES = Each Section S = Section (S1 = Sec 1)</td> <td style="width: 30%;">CP = Complete Pattern M = Matrix</td> <td style="width: 10%; text-align: center;">inch</td> </tr> <tr> <td></td> <td></td> <td></td> <td style="text-align: center; border: 1px solid black;">millimeter</td> </tr> </table>						GAGE DIMENSIONS	Legend: ES = Each Section S = Section (S1 = Sec 1)	CP = Complete Pattern M = Matrix	inch				millimeter
GAGE DIMENSIONS	Legend: ES = Each Section S = Section (S1 = Sec 1)	CP = Complete Pattern M = Matrix	inch										
			millimeter										
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width								
0.031	0.076	0.062	0.062	0.23	0.16								
0.79	1.93	1.57	1.57	5.8	4.1								

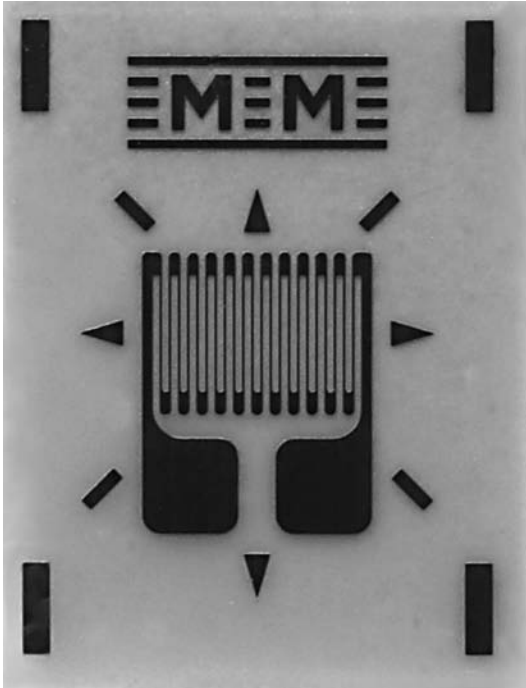
GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
EA	Constantan foil in combination with a tough, flexible, polyimide backing.	±3%	-100° to +350°F [-75° to +175°C]
WA	Fully encapsulated constantan gages with high-endurance leadwires.	±2%	-100° to +400°F [-75° to +205°C]
EP	Annealed constantan foil with tough, high-elongation polyimide backing.	±10%	-100° to +400°F [-75° to +205°C]
SA	Fully encapsulated constantan gages with solder dots.	±2%	-100° to +400°F [-75° to +205°C]

Note 1: Insert desired S-T-C number in spaces marked XX.

Note 2: Tolerance is increased when Option W, E, SE, LE, or P is specified.

Note 3: Products with designations and options shown in bold are not RoHS compliant.

General Purpose Strain Gages - Linear Pattern

GAGE PATTERN DATA					
 <p>actual size</p>			GAGE DESIGNATION See Note 1, 3	RESISTANCE (OHMS) See Note 2	OPTIONS AVAILABLE See Note 3
			EA-XX-031CF-120 ED-DY-031CF-350 WA-XX-031CF-120 WK-XX-031CF-350 EP-08-031CF-120 SA-XX-031CF-120 SK-XX-031CF-120 SK-XX-031CF-350 SD-DY-031CF-350	120 ± 0.2% 350 ± 0.4% 120 ± 0.4% 350 ± 0.4% 120 ± 0.2% 120 ± 0.4% 120 ± 0.4% 350 ± 0.4% 350 ± 0.8%	W, E, L, LE, P E, L*, LE*
DESCRIPTION General-purpose miniature gage. Similar to 031CE pattern except for resistance. See also 032UW pattern.					
GAGE DIMENSIONS			Legend: ES = Each Section S = Section (S1 = Sec 1)	CP = Complete Pattern M = Matrix	<input type="checkbox"/> inch <input checked="" type="checkbox"/> millimeter
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.031	0.076	0.062	0.062	0.19	0.14
0.79	1.93	1.57	1.57	4.8	3.5

GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
EA	Constantan foil in combination with a tough, flexible, polyimide backing.	±3%	-100° to +350°F [-75° to +175°C]
ED	Isoelastic foil in combination with tough, flexible polyimide film.	±2%	-320° to +400°F [-195° to +205°C]
WA	Fully encapsulated constantan gages with high-endurance leadwires.	±2%	-100° to +400°F [-75° to +205°C]
WK	Fully encapsulated K-alloy gages with high-endurance leadwires.	±1.5%	-452° to +550°F [-269° to +290°C]
EP	Annealed constantan foil with tough, high-elongation polyimide backing.	±10%	-100° to +400°F [-75° to +205°C]
SA	Fully encapsulated constantan gages with solder dots.	±2%	-100° to +400°F [-75° to +205°C]
SK	Fully encapsulated K-alloy gages with solder dots.	±1.5%	-452° to +450°F [-269° to +230°C]
SD	Equivalent to WD Series, but with solder dots instead of leadwires.	±1.5%	-320° to +400°F [-195° to +205°C]

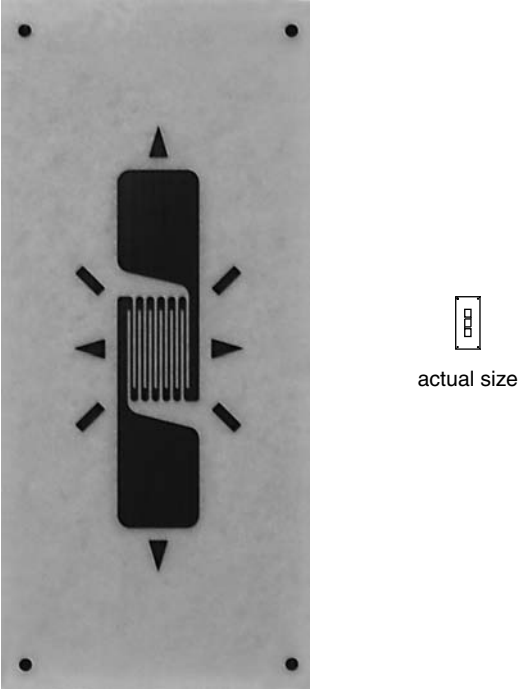
Note 1: Insert desired S-T-C number in spaces marked XX.

Note 2: Tolerance is increased when Option W, E, SE, LE, or P is specified.

Note 3: Products with designations and options shown in bold are not RoHS compliant.

*Options available but not normally recommended. See Optional Features data sheet for details.

General Purpose Strain Gages - Linear Pattern

GAGE PATTERN DATA					
			GAGE DESIGNATION	RESISTANCE (OHMS)	OPTIONS AVAILABLE
			See Note 1, 3	See Note 2	See Note 3
			EA-XX-031DE-120 EA-XX-031DE-350 ED-DY-031DE-350 WA-XX-031DE-120 WA-XX-031DE-350 WK-XX-031DE-350 EP-XX-031DE-120 SA-XX-031DE-350 SA-XX-031DE-350 SK-XX-031DE-120 SK-XX-031DE-350 SD-DY-031DE-350	120 ± 0.2% 350 ± 0.2% 350 ± 0.4% 120 ± 0.4% 350 ± 0.4% 350 ± 0.4% 120 ± 0.2% 350 ± 0.4% 350 ± 0.4% 120 ± 0.4% 350 ± 0.4% 350 ± 0.8%	E, SE , L, LE E, SE , L, LE E, L*, LE*
DESCRIPTION					
General-purpose miniature gage.					
GAGE DIMENSIONS		Legend: ES = Each Section S = Section (S1 = Sec 1)		CP = Complete Pattern M = Matrix	<input type="checkbox"/> inch <input checked="" type="checkbox"/> millimeter
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.031	0.140	0.032	0.032	0.27	0.12
0.79	3.56	0.81	0.81	6.9	3.0

GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
EA	Constantan foil in combination with a tough, flexible, polyimide backing.	±3%	-100° to +350°F [-75° to +175°C]
ED	Isoelastic foil in combination with tough, flexible polyimide film.	±2%	-320° to +400°F [-195° to +205°C]
WA	Fully encapsulated constantan gages with high-endurance leadwires.	±2%	-100° to +400°F [-75° to +205°C]
WK	Fully encapsulated K-alloy gages with high-endurance leadwires.	±1.5%	-452° to +550°F [-269° to +290°C]
EP	Annealed constantan foil with tough, high-elongation polyimide backing.	±10%	-100° to +400°F [-75° to +205°C]
SA	Fully encapsulated constantan gages with solder dots.	±2%	-100° to +400°F [-75° to +205°C]
SK	Fully encapsulated K-alloy gages with solder dots.	±1.5%	-452° to +450°F [-269° to +230°C]
SD	Equivalent to WD Series, but with solder dots instead of leadwires.	±1.5%	-320° to +400°F [-195° to +205°C]

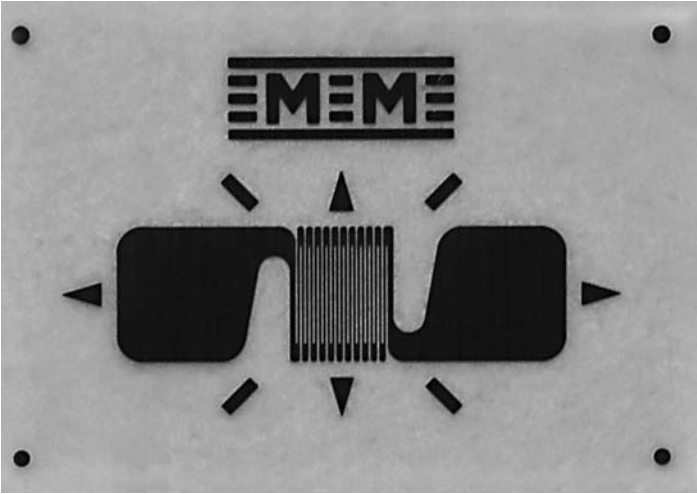
Note 1: Insert desired S-T-C number in spaces marked XX.

Note 2: Tolerance is increased when Option W, E, SE, LE, or P is specified.

Note 3: Products with designations and options shown in bold are not RoHS compliant.

*Options available but not normally recommended. See Optional Features data sheet for details.

General Purpose Strain Gages - Linear Pattern

GAGE PATTERN DATA					
 <p style="text-align: center;">actual size</p>			GAGE DESIGNATION See Note 1, 3	RESISTANCE (OHMS) See Note 2	OPTIONS AVAILABLE See Note 3 ^A
			EA-XX-031EC-120 EA-XX-031EC-350 ED-DY-031EC-350 WA-XX-031EC-120 WA-XX-031EC-350 WK-XX-031EC-350 EP-08-031EC-120 SA-XX-031EC-120 SA-XX-031EC-350 SK-XX-031EC-120 SK-XX-031EC-350 SD-DY-031EC-350	120 ± 0.2% 350 ± 0.2% 350 ± 0.4% 120 ± 0.4% 350 ± 0.4% 350 ± 0.4% 120 ± 0.2% 120 ± 0.4% 350 ± 0.4% 120 ± 0.4% 350 ± 0.4% 350 ± 0.8%	E, SE , L, LE E, SE , L, LE E, L*, LE*
DESCRIPTION General-purpose miniature gage. Similar to 031DE pattern but with tab at each side of grid.					
GAGE DIMENSIONS					
			Legend: ES = Each Section S = Section (S1 = Sec 1)	CP = Complete Pattern M = Matrix	<input type="checkbox"/> inch <input type="checkbox"/> millimeter
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.031	0.042	0.032	0.140	0.17	0.23
0.79	1.07	0.81	3.56	4.3	5.8

GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
EA	Constantan foil in combination with a tough, flexible, polyimide backing.	±3%	-100° to +350°F [-75° to +175°C]
ED	Isoelastic foil in combination with tough, flexible polyimide film.	±2%	-320° to +400°F [-195° to +205°C]
WA	Fully encapsulated constantan gages with high-endurance leadwires.	±2%	-100° to +400°F [-75° to +205°C]
WK	Fully encapsulated K-alloy gages with high-endurance leadwires.	±1.5%	-452° to +550°F [-269° to +290°C]
EP	Annealed constantan foil with tough, high-elongation polyimide backing.	±10%	-100° to +400°F [-75° to +205°C]
SA	Fully encapsulated constantan gages with solder dots.	±2%	-100° to +400°F [-75° to +205°C]
SK	Fully encapsulated K-alloy gages with solder dots.	±1.5%	-452° to +450°F [-269° to +230°C]
SD	Equivalent to WD Series, but with solder dots instead of leadwires.	±1.5%	-320° to +400°F [-195° to +205°C]

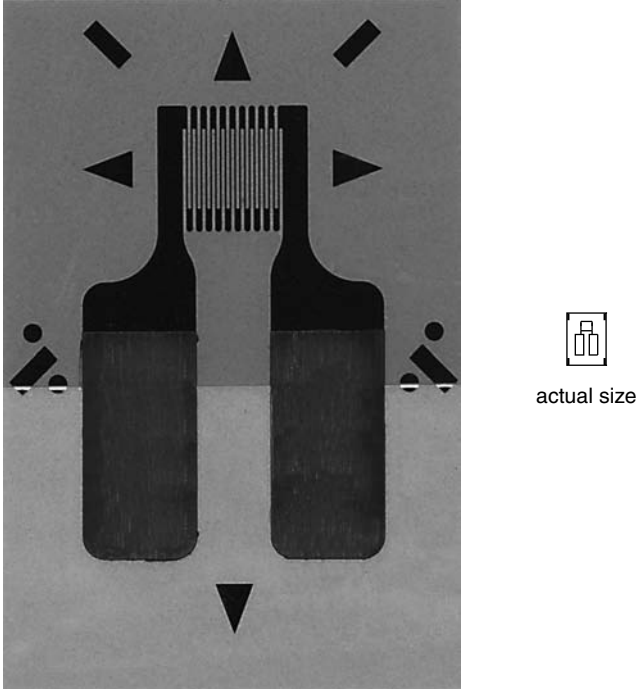
Note 1: Insert desired S-T-C number in spaces marked XX.

Note 2: Tolerance is increased when Option W, E, SE, LE, or P is specified.

Note 3: Products with designations and options shown in bold are not RoHS compliant.

*Options available but not normally recommended. See Optional Features data sheet for details.

General Purpose Strain Gages - Linear Pattern

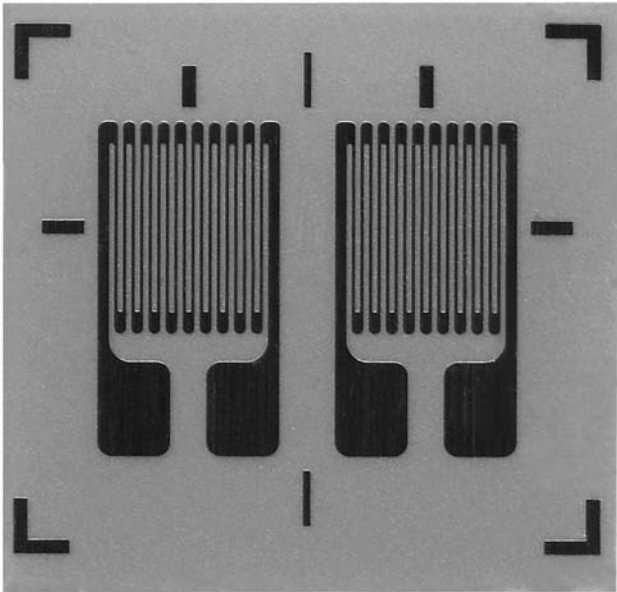
GAGE PATTERN DATA					
			GAGE DESIGNATION See Note 1	RESISTANCE (OHMS)	OPTIONS AVAILABLE See Note 2
			CEA-XX-032UW-120	120 ± 0.3%	P2
DESCRIPTION General-purpose miniature gage. Exposed solder tab area is 0.07 x 0.04 in [1.8 x 1.0 mm].					
GAGE DIMENSIONS		Legend: ES = Each Section S = Section (S1 = Sec 1)		CP = Complete Pattern M = Matrix	
				inch	
				millimeter	
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.032	0.180	0.060	0.120	0.27	0.19
0.81	4.57	1.52	3.05	6.9	4.8

GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
CEA	Universal general-purpose strain gages.	±3%	-100° to +350°F [-75° to +175°C]

Note 1: Insert desired S-T-C number in spaces marked XX.

Note 2: Products with designations and options shown in bold are not RoHS compliant.

General Purpose Strain Gages - Linear Pattern

GAGE PATTERN DATA					
 <p>actual size</p>			GAGE DESIGNATION See Note 1, 3	RESISTANCE (OHMS) See Note 2	OPTIONS AVAILABLE See Note 3
			EA-XX-060PB-120 EA-XX-060PB-350 WA-XX-060PB-120 WA-XX-060PB-350 WK-XX-060PB-350 WK-XX-060PB-500 SA-XX-060PB-120 SA-XX-060PB-350 SK-XX-060PB-350 SK-XX-060PB-500	120 ± 0.2% 350 ± 0.2% 120 ± 0.3% 350 ± 0.3% 350 ± 0.3% 500 ± 0.3% 120 ± 0.3% 350 ± 0.3% 350 ± 0.3% 500 ± 0.3%	W, E, L, LE W, E, L, LE W* W* W* W*
DESCRIPTION Dual pattern for back-to-back bending sections. Longitudinal grid centerlines spaced 0.085 in (2.16 mm) apart.					
GAGE DIMENSIONS					
			Legend: ES = Each Section S = Section (S1 = Sec 1)	CP = Complete Pattern M = Matrix	<input type="checkbox"/> inch <input type="checkbox"/> millimeter
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.060 ES	0.120 CP	0.065 ES	0.150 CP	0.18	0.20
1.52 ES	3.05 CP	1.65 ES	3.81 CP	4.6	5.1

GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
EA	Constantan foil in combination with a tough, flexible, polyimide backing.	±3%	-100° to +350°F (-75° to +175°C)
WA	Fully encapsulated constantan gages with high-endurance leadwires.	±2%	-100° to +400°F (-75° to +205°C)
WK	Fully encapsulated K-alloy gages with high-endurance leadwires.	±1.5%	-452° to +550°F (-269° to +290°C)
SA	Fully encapsulated constantan gages with solder dots.	±2%	-100° to +400°F (-75° to +205°C)
SK	Fully encapsulated K-alloy gages with solder dots.	±1.5%	-452° to +450°F (-269° to +230°C)

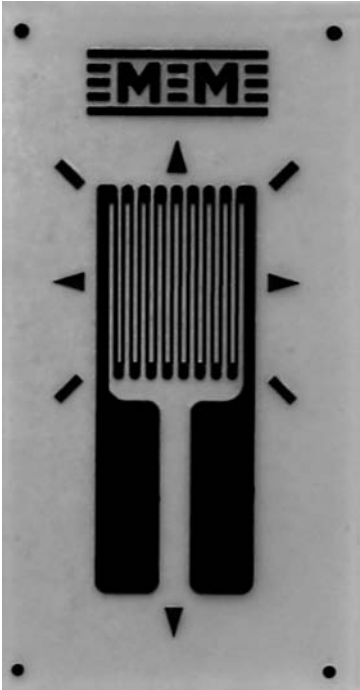
Note 1: Insert desired S-T-C number in spaces marked XX.

Note 2: Tolerance is increased when Option W, E, SE, LE, or P is specified.

Note 3: Products with designations and options shown in bold are not RoHS compliant.

*Options available but not normally recommended. See Optional Features data sheet for details.

General Purpose Strain Gages - Linear Pattern

GAGE PATTERN DATA					
 <p style="text-align: center;">actual size</p>			GAGE DESIGNATION See Note 1	RESISTANCE (OHMS) See Note 2	OPTIONS AVAILABLE See Note 3
			EA-XX-062AK-120 ED-DY-062AK-350 EP-08-062AK-120	120 ± 0.15% 350 ± 0.4% 120 ± 0.15%	E, P E
DESCRIPTION General-purpose gage with elongated solder tabs. See the 062AP pattern for WA, WK, and other series with this grid size.					
GAGE DIMENSIONS		Legend: ES = Each Section S = Section (S1 = Sec 1)		CP = Complete Pattern M = Matrix	
				inch	millimeter
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.062	0.160	0.062	0.062	0.27	0.14
1.57	4.06	1.57	1.57	6.9	3.6

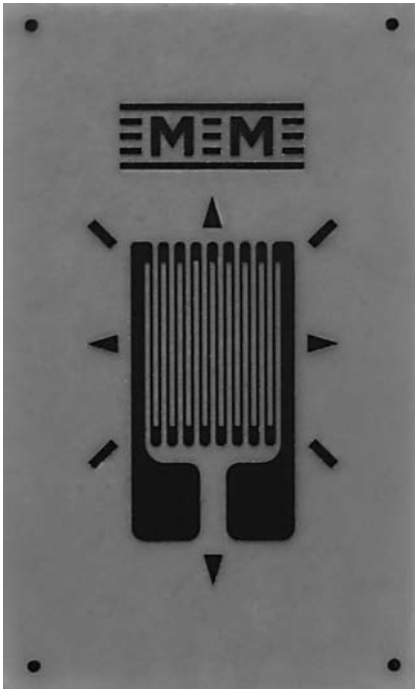
GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
EA	Constantan foil in combination with a tough, flexible, polyimide backing.	±3%	-100° to +350°F [-75° to +175°C]
ED	Isoelastic foil in combination with tough, flexible polyimide film.	±2%	-320° to +400°F [-195° to +205°C]
EP	Annealed constantan foil with tough, high-elongation polyimide backing.	±10%	-100° to +400°F [-75° to +205°C]

Note 1: Insert desired S-T-C number in spaces marked XX.

Note 2: Tolerance is increased when Option W, E, SE, LE, or P is specified.

Note 3: Products with designations and options shown in bold are not RoHS compliant.

General Purpose Strain Gages - Linear Pattern

GAGE PATTERN DATA					
 <p>actual size</p>			GAGE DESIGNATION See Note 1, 3	RESISTANCE (OHMS) See Note 2	OPTIONS AVAILABLE See Note 3
			EA-XX-062AP-120 ED-DY-062AP-350 EK-XX-062AP-350 WA-XX-062AP-120 WK-XX-062AP-350 EP-XX-062AP-120 SA-XX-062AP-120 SK-XX-062AP-350 SD-DY-062AP-350 WD-DY-062AP-350	120 ± 0.15% 350 ± 0.4% 350 ± 0.15% 120 ± 0.3% 350 ± 0.3% 120 ± 0.15% 120 ± 0.3% 350 ± 0.3% 350 ± 0.8% 350 ± 0.8%	W, E, L, LE, P E, L*, LE* W, SE W* W*
DESCRIPTION Widely used general-purpose gage. See also 062UW pattern. EK-Series gages are supplied with duplex copper pads (DP) when optional feature W or SE is not specified.					
GAGE DIMENSIONS			Legend: ES = Each Section S = Section (S1 = Sec 1)	CP = Complete Pattern M = Matrix	<input type="checkbox"/> inch <input checked="" type="checkbox"/> millimeter
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.062	0.114	0.062	0.062	0.26	0.16
1.57	2.90	1.57	1.57	6.6	4.1

GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
EA	Constantan foil in combination with a tough, flexible, polyimide backing.	±3%	-100° to +350°F [-75° to +175°C]
ED	Isoelastic foil in combination with tough, flexible polyimide film.	±2%	-320° to +400°F [-195° to +205°C]
EK	K-alloy foil in combination with a tough, flexible polyimide backing.	±1.5%	-320° to +350°F [-195° to +175°C]
WA	Fully encapsulated constantan gages with high-endurance leadwires.	±2%	-100° to +400°F [-75° to +205°C]
WK	Fully encapsulated K-alloy gages with high-endurance leadwires.	±1.5%	-452° to +550°F [-269° to +290°C]
EP	Annealed constantan foil with tough, high-elongation polyimide backing.	±10%	-100° to +400°F [-75° to +205°C]
SA	Fully encapsulated constantan gages with solder dots.	±2%	-100° to +400°F [-75° to +205°C]
SK	Fully encapsulated K-alloy gages with solder dots.	±1.5%	-452° to +450°F [-269° to +230°C]
SD	Equivalent to WD Series, but with solder dots instead of leadwires.	±1.5%	-320° to +400°F [-195° to +205°C]
WD	Fully encapsulated isoelastic gages with high-endurance leadwires.	±1.5%	-320° to +500°F [-195° to +260°C]

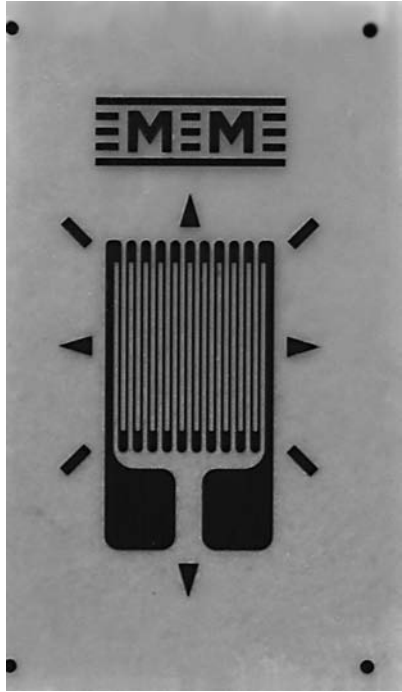
Note 1: Insert desired S-T-C number in spaces marked XX.

Note 2: Tolerance is increased when Option W, E, SE, LE, or P is specified.

Note 3: Products with designations and options shown in bold are not RoHS compliant.

*Options available but not normally recommended. See Optional Features data sheet for details.

General Purpose Strain Gages - Linear Pattern

GAGE PATTERN DATA					
 <p style="text-align: center;">actual size</p>			GAGE DESIGNATION See Note 1, 3	RESISTANCE (OHMS) See Note 2	OPTIONS AVAILABLE See Note 3
			EA-XX-062AQ-350 ED-DY-062AQ-500 WA-XX-062AQ-350 WK-XX-062AQ-500 EP-08-062AQ-350 SA-XX-062AQ-350 SK-XX-062AQ-500 SD-DY-062AQ-500 WD-DY-062AQ-500	350 ± 0.15% 500 ± 0.4% 350 ± 0.3% 500 ± 0.3% 350 ± 0.15% 350 ± 0.3% 500 ± 0.3% 500 ± 0.8% 500 ± 0.8%	W, E, L, LE, P E, L*, LE* W* W*
DESCRIPTION General-purpose gage. Similar to 062AP pattern but with high-resistance grid. See also 062UW pattern.					
GAGE DIMENSIONS					
			Legend: ES = Each Section S = Section (S1 = Sec 1)	CP = Complete Pattern M = Matrix	<input type="checkbox"/> inch <input checked="" type="checkbox"/> millimeter
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.062	0.114	0.062	0.062	0.26	0.15
1.57	2.90	1.57	1.57	6.6	3.8

GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
EA	Constantan foil in combination with a tough, flexible, polyimide backing.	±3%	-100° to +350°F [-75° to +175°C]
ED	Isoelastic foil in combination with tough, flexible polyimide film.	±2%	-320° to +400°F [-195° to +205°C]
WA	Fully encapsulated constantan gages with high-endurance leadwires.	±2%	-100° to +400°F [-75° to +205°C]
WK	Fully encapsulated K-alloy gages with high-endurance leadwires.	±1.5%	-452° to +550°F [-269° to +290°C]
EP	Annealed constantan foil with tough, high-elongation polyimide backing.	±10%	-100° to +400°F [-75° to +205°C]
SA	Fully encapsulated constantan gages with solder dots.	±2%	-100° to +400°F [-75° to +205°C]
SK	Fully encapsulated K-alloy gages with solder dots.	±1.5%	-452° to +450°F [-269° to +230°C]
SD	Equivalent to WD Series, but with solder dots instead of leadwires.	±1.5%	-320° to +400°F [-195° to +205°C]
WD	Fully encapsulated isoelastic gages with high-endurance leadwires.	±1.5%	-320° to +500°F [-195° to +260°C]

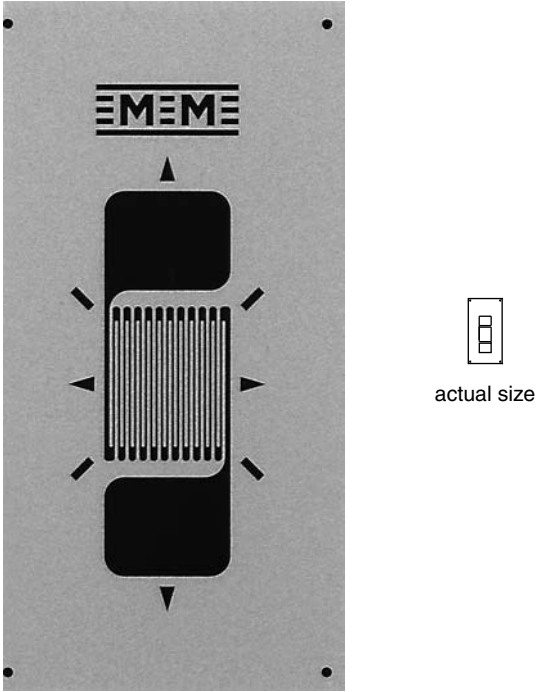
Note 1: Insert desired S-T-C number in spaces marked XX.

Note 2: Tolerance is increased when Option W, E, SE, LE, or P is specified.

Note 3: Products with designations and options shown in bold are not RoHS compliant.

*Options available but not normally recommended. See Optional Features data sheet for details.

General Purpose Strain Gages - Linear Pattern

GAGE PATTERN DATA							
			GAGE DESIGNATION	RESISTANCE (OHMS)	OPTIONS AVAILABLE		
			See Note 1, 3	See Note 2	See Note 3		
			EA-XX-062DN-350 ED-DY-062DN-500 WA-XX-062DN-350 WK-XX-062DN-500 EP-08-062DN-350 SA-XX-062DN-350 SK-XX-062DN-500 SD-DY-062DMN-500 WD-DY-062DN-500	350 ± 0.15% 500 ± 0.4% 350 ± 0.3% 500 ± 0.3% 350 ± 0.15% 350 ± 0.3% 500 ± 0.3% 500 ± 0.8% 500 ± 0.8%	E, L, LE E, L*, LE*		
DESCRIPTION							
Similar to 062DF pattern except for grid resistance.							
GAGE DIMENSIONS		Legend: ES = Each Section S = Section (S1 = Sec 1)		CP = Complete Pattern M = Matrix	<table border="1"> <tr><td>inch</td></tr> <tr><td>millimeter</td></tr> </table>	inch	millimeter
inch							
millimeter							
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width		
0.062	0.190	0.062	0.062	0.34	0.18		
1.57	4.83	1.57	1.57	8.6	4.6		

GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
EA	Constantan foil in combination with a tough, flexible, polyimide backing.	±3%	-100° to +350°F [-75° to +175°C]
ED	Isoelastic foil in combination with tough, flexible polyimide film.	±2%	-320° to +400°F [-195° to +205°C]
WA	Fully encapsulated constantan gages with high-endurance leadwires.	±2%	-100° to +400°F [-75° to +205°C]
WK	Fully encapsulated K-alloy gages with high-endurance leadwires.	±1.5%	-452° to +550°F [-269° to +290°C]
EP	Annealed constantan foil with tough, high-elongation polyimide backing.	±10%	-100° to +400°F [-75° to +205°C]
SA	Fully encapsulated constantan gages with solder dots.	±2%	-100° to +400°F [-75° to +205°C]
SK	Fully encapsulated K-alloy gages with solder dots.	±1.5%	-452° to +450°F [-269° to +230°C]
SD	Equivalent to WD Series, but with solder dots instead of leadwires.	±1.5%	-320° to +400°F [-195° to +205°C]
WD	Fully encapsulated isoelastic gages with high-endurance leadwires.	±1.5%	-320° to +500°F [-195° to +260°C]


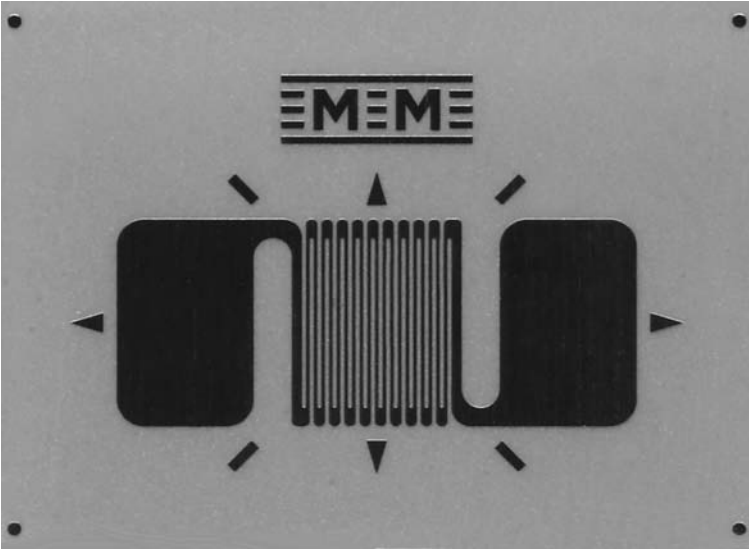

Note 1: Insert desired S-T-C number in spaces marked XX.

Note 2: Tolerance is increased when Option W, E, SE, LE, or P is specified.

Note 3: Products with designations and options shown in bold are not RoHS compliant.

*Options available but not normally recommended. See Optional Features data sheet for details.

General Purpose Strain Gages - Linear Pattern

GAGE PATTERN DATA					
   actual size			GAGE DESIGNATION See Note 1, 3	RESISTANCE (OHMS) See Note 2	OPTIONS AVAILABLE See Note 3
			EA-XX-062ED-120 ED-DY-062ED-350 WA-XX-062ED-120 WK-XX-062ED-350 EP-08-062ED-120 SA-XX-062ED-350 SK-XX-062ED-350 SD-DY-062ED-350 WD-DY-062ED-350	120 ± 0.15% 350 ± 0.4% 120 ± 0.3% 350 ± 0.3% 120 ± 0.15% 120 ± 0.3% 350 ± 0.3% 350 ± 0.8% 350 ± 0.8%	E, L, LE E, L*, LE*
DESCRIPTION General-purpose gage. Similar to 062EN pattern except for grid resistance.					
GAGE DIMENSIONS					
			Legend: ES = Each Section S = Section (S1 = Sec 1)	CP = Complete Pattern M = Matrix	<input type="checkbox"/> inch <input checked="" type="checkbox"/> millimeter
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.062	0.076	0.062	0.190	0.21	0.29
1.57	1.93	1.57	4.83	5.3	7.4

GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
EA	Constantan foil in combination with a tough, flexible, polyimide backing.	±3%	-100° to +350°F (-75° to +175°C)
ED	Isoelastic foil in combination with tough, flexible polyimide film.	±2%	-320° to +400°F (-195° to +205°C)
WA	Fully encapsulated constantan gages with high-endurance leadwires.	±2%	-100° to +400°F (-75° to +205°C)
WK	Fully encapsulated K-alloy gages with high-endurance leadwires.	±1.5%	-452° to +550°F (-269° to +290°C)
EP	Annealed constantan foil with tough, high-elongation polyimide backing.	±10%	-100° to +400°F (-75° to +205°C)
SA	Fully encapsulated constantan gages with solder dots.	±2%	-100° to +400°F (-75° to +205°C)
SK	Fully encapsulated K-alloy gages with solder dots.	±1.5%	-452° to +450°F (-269° to +230°C)
SD	Equivalent to WD Series, but with solder dots instead of leadwires.	±1.5%	-320° to +400°F (-195° to +205°C)
WD	Fully encapsulated isoelastic gages with high-endurance leadwires.	±1.5%	-320° to +500°F (-195° to +260°C)

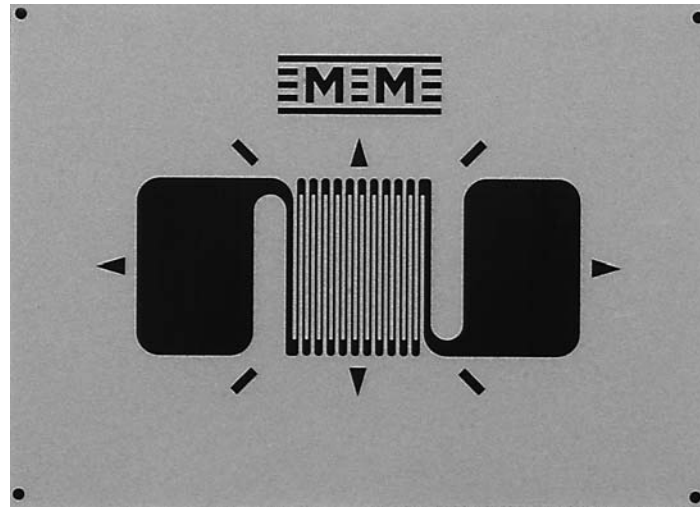
Note 1: Insert desired S-T-C number in spaces marked XX.

Note 2: Tolerance is increased when Option W, E, SE, LE, or P is specified.

Note 3: Products with designations and options shown in bold are not RoHS compliant.

*Options available but not normally recommended. See Optional Features data sheet for details.

General Purpose Strain Gages - Linear Pattern

GAGE PATTERN DATA					
 <p style="text-align: center;">actual size</p>			GAGE DESIGNATION See Note 1, 3	RESISTANCE (OHMS) See Note 2	OPTIONS AVAILABLE See Note 3
			EA-XX-062EN-350 ED-DY-062EN-500 WA-XX-062EN-350 WK-XX-062EN-500 EP-08-062EN-350 SA-XX-062EN-350 SK-XX-062EN-500 SD-DY-062EN-500 WD-DY-062EN-500	350 ± 0.15% 500 ± 0.4% 350 ± 0.3% 500 ± 0.3% 350 ± 0.15% 350 ± 0.3% 500 ± 0.3% 500 ± 0.8% 500 ± 0.8%	E, L, LE E, L*, LE*
DESCRIPTION Similar to 062ED pattern except for grid resistance.					
GAGE DIMENSIONS					
			Legend: ES = Each Section S = Section (S1 = Sec 1)	CP = Complete Pattern M = Matrix	<input type="checkbox"/> inch <input type="checkbox"/> millimeter
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.062	0.076	0.062	0.190	0.23	0.31
1.57	1.93	1.57	4.83	5.8	7.9

GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
EA	Constantan foil in combination with a tough, flexible, polyimide backing.	±3%	-100° to +350°F [-75° to +175°C]
ED	Isoelastic foil in combination with tough, flexible polyimide film.	±2%	-320° to +400°F [-195° to +205°C]
WA	Fully encapsulated constantan gages with high-endurance leadwires.	±2%	-100° to +400°F [-75° to +205°C]
WK	Fully encapsulated K-alloy gages with high-endurance leadwires.	±1.5%	-452° to +550°F [-269° to +290°C]
EP	Annealed constantan foil with tough, high-elongation polyimide backing.	±10%	-100° to +400°F [-75° to +205°C]
SA	Fully encapsulated constantan gages with solder dots.	±2%	-100° to +400°F [-75° to +205°C]
SK	Fully encapsulated K-alloy gages with solder dots.	±1.5%	-452° to +450°F [-269° to +230°C]
SD	Equivalent to WD Series, but with solder dots instead of leadwires.	±1.5%	-320° to +400°F [-195° to +205°C]
WD	Fully encapsulated isoelastic gages with high-endurance leadwires.	±1.5%	-320° to +500°F [-195° to +260°C]

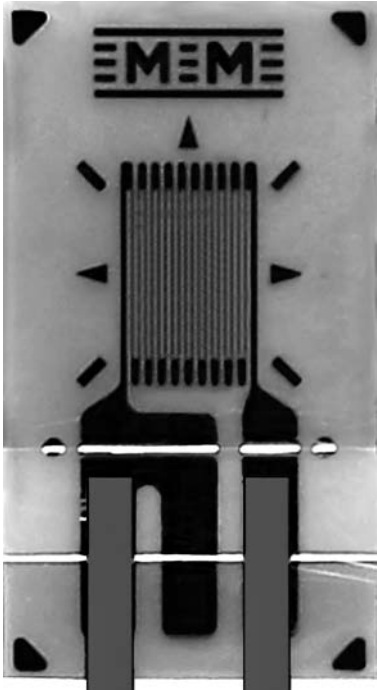


Note 1: Insert desired S-T-C number in spaces marked XX.

Note 2: Tolerance is increased when Option W, E, SE, LE, or P is specified.


Note 3: Products with designations and options shown in bold are not RoHS compliant.

*Options available but not normally recommended. See Optional Features data sheet for details.


General Purpose Strain Gages - Linear Pattern

GAGE PATTERN DATA					
  actual size			GAGE DESIGNATION See Note 1	RESISTANCE (OHMS)	OPTIONS AVAILABLE
			L2A-XX-062LW-120 L2A-XX-062LW-350 C2A-XX-062LW-120 C2A-XX-062LW-350	120 ± 0.6% 350 ± 0.6% 120 ± 0.6% 350 ± 0.6%	
DESCRIPTION Widely used general-purpose gage.					
GAGE DIMENSIONS			Legend: ES = Each Section S = Section (S1 = Sec 1)	CP = Complete Pattern M = Matrix	<input type="checkbox"/> inch <input type="checkbox"/> millimeter
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.062	0.175	0.050	0.080	0.252	0.170
1.52	4.45	1.27	2.03	6.40	4.32

GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
L2A	Encapsulated constantan gages with preattached ribbon leads.	±3%	-100° to +250°F [-75° to +120°C]
C2A	Encapsulated constantan gages with preattached ready-to-use cables.	±3%	-60° to +180°F [-50° to +80°C]



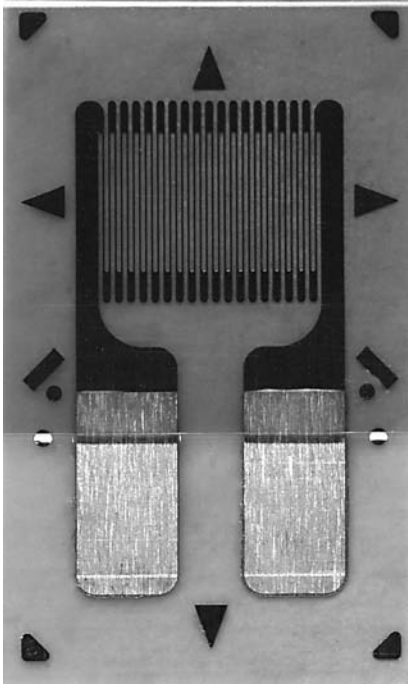
Example of an
L2A Construction



Example of a
C2A Construction

Note 1: Insert desired S-T-C number in spaces marked XX.

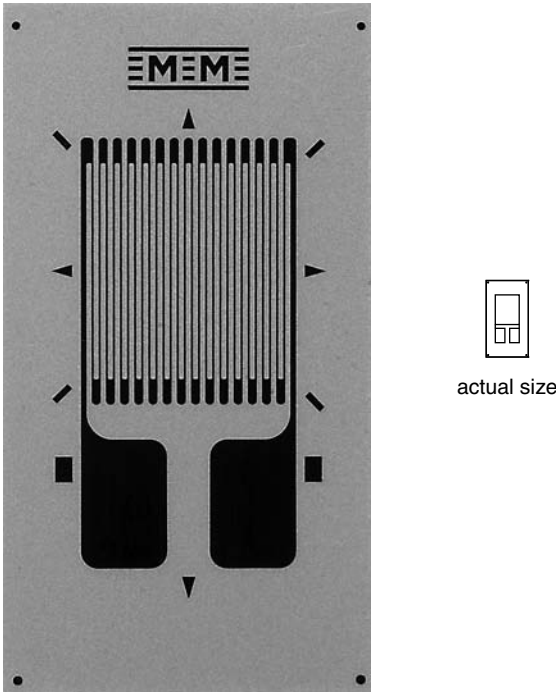
General Purpose Strain Gages - Linear Pattern

GAGE PATTERN DATA					
 <p>actual size</p>			GAGE DESIGNATION See Note 1	RESISTANCE (OHMS)	OPTIONS AVAILABLE See Note 2
			CEA-XX-062UW-120 CEA-XX-062UW-350	120 ± 0.3% 350 ± 0.3%	P2 P2
DESCRIPTION General-purpose gage. Exposed solder tab area is 0.07 x 0.04 in [1.8 x 1.0 mm].					
GAGE DIMENSIONS		Legend: ES = Each Section S = Section (S1 = Sec 1)		CP = Complete Pattern M = Matrix	
				<input type="checkbox"/> inch <input checked="" type="checkbox"/> millimeter	
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.062	0.220	0.120	0.120	0.31	0.19
1.57	5.59	3.05	3.05	7.9	4.8
GAGE SERIES DATA					
See Gage Series data sheet for complete specifications.					
Series	Description	Strain Range	Temperature Range		
CEA	Universal general-purpose strain gages.	±3%	-100° to +350°F [-75° to +175°C]		

Note 1: Insert desired S-T-C number in spaces marked XX.

Note 2: Products with designations and options shown in bold are not RoHS compliant.

General Purpose Strain Gages - Linear Pattern

GAGE PATTERN DATA					
			GAGE DESIGNATION See Note 1, 3	RESISTANCE (OHMS) See Note 2	OPTIONS AVAILABLE See Note 3
			EA-XX-125AC-350 ED-DY-125AC-10C EK-XX-125AC-10C S2K-XX-125AC-10C WA-XX-125AC-350 WK-XX-125AC-10C EP-08-125AC-350 SA-XX-125AC-350 SK-XX-125AC-10C SD-DY-125AC-10C WD-DY-125AC-10C	350 ± 0.15% 1000 ± 0.3% 1000 ± 0.15% 1000 ± 0.3% 350 ± 0.3% 1000 ± 0.3% 350 ± 0.15% 350 ± 0.3% 1000 ± 0.3% 1000 ± 0.6% 1000 ± 0.6%	W, E, L, LE, P E, L*, LE* W, SE W* W*
DESCRIPTION Widely used general-purpose gage with high-resistance grid. See also 125AD, 125UN, and 125UW patterns. EK-Series gages are supplied with duplex copper pads (DP) when optional feature W or SE is not specified.					
GAGE DIMENSIONS					
			Legend: ES = Each Section S = Section (S1 = Sec 1)	CP = Complete Pattern M = Matrix	<input type="checkbox"/> inch <input checked="" type="checkbox"/> millimeter
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.125	0.250	0.125	0.125	0.40	0.22
3.18	6.35	3.18	3.18	10.2	5.6

GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
EA	Constantan foil in combination with a tough, flexible, polyimide backing.	±5%	-100° to +350°F [-75° to +175°C]
ED	Isoelastic foil in combination with tough, flexible polyimide film.	±2%	-320° to +400°F [-195° to +205°C]
EK	K-alloy foil in combination with a tough, flexible polyimide backing.	±1.5%	-320° to +350°F [-195° to +175°C]
S2K	K-alloy foil with laminated thick, high-performance polyimide backing.	±1.5%	-100° to +250°F [-75° to +120°C]
WA	Fully encapsulated constantan gages with high-endurance leadwires.	±2%	-100° to +400°F [-75° to +205°C]
WK	Fully encapsulated K-alloy gages with high-endurance leadwires.	±1.5%	-452° to +550°F [-269° to +290°C]
EP	Annealed constantan foil with tough, high-elongation polyimide backing.	±20%	-100° to +400°F [-75° to +205°C]
SA	Fully encapsulated constantan gages with solder dots.	±2%	-100° to +400°F [-75° to +205°C]
SK	Fully encapsulated K-alloy gages with solder dots.	±1.5%	-452° to +450°F [-269° to +230°C]
SD	Equivalent to WD Series, but with solder dots instead of leadwires.	±1.5%	-320° to +400°F [-195° to +205°C]
WD	Fully encapsulated isoelastic gages with high-endurance leadwires.	±1.5%	-320° to +500°F [-195° to +260°C]

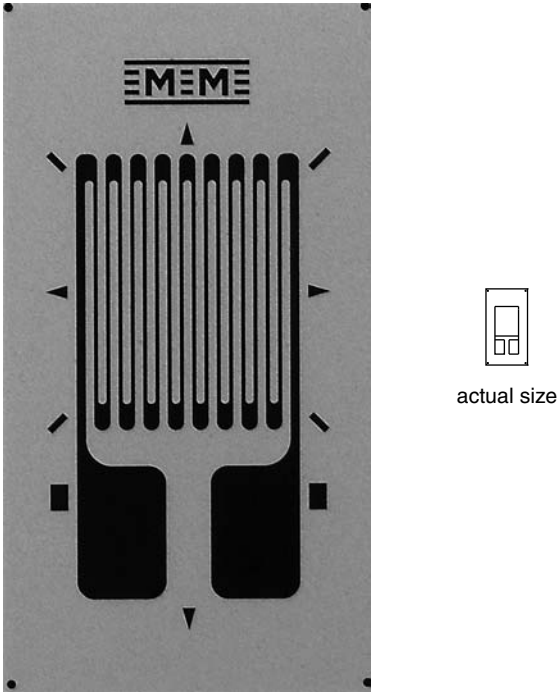
Note 1: Insert desired S-T-C number in spaces marked XX.

Note 2: Tolerance is increased when Option W, E, SE, LE, or P is specified.

Note 3: Products with designations and options shown in bold are not RoHS compliant.

*Options available but not normally recommended. See Optional Features data sheet for details.

General Purpose Strain Gages - Linear Pattern

GAGE PATTERN DATA					
 <p>actual size</p>			GAGE DESIGNATION See Note 1, 3	RESISTANCE (OHMS) See Note 2	OPTIONS AVAILABLE See Note 3
			EA-XX-125AD-120 ED-DY-125AD-350 EK-XX-125AD-350 WA-XX-125AD-120 WK-XX-125AD-350 EP-XX-125AD-120 SA-XX-125AD-120 SK-XX-125AD-350 SD-DY-125AD-350 WD-DY-125AD-350	120 ± 0.15% 350 ± 0.3% 350 ± 0.15% 120 ± 0.3% 350 ± 0.3% 120 ± 0.15% 120 ± 0.3% 350 ± 0.3% 350 ± 0.6% 350 ± 0.6%	W, E, L, LE, P E, L*, LE* W, SE W* W*
DESCRIPTION Widely used general-purpose gage. EK-Series gages are supplied with duplex copper pads (DP) when optional feature W or SE is not specified.					
GAGE DIMENSIONS			Legend: ES = Each Section S = Section (S1 = Sec 1)	CP = Complete Pattern M = Matrix	<input type="checkbox"/> inch <input checked="" type="checkbox"/> millimeter
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.125	0.250	0.125	0.125	0.40	0.22
3.18	6.35	3.18	3.18	10.2	5.6

GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
EA	Constantan foil in combination with a tough, flexible, polyimide backing.	±5%	-100° to +350°F [-75° to +175°C]
ED	Isoelastic foil in combination with tough, flexible polyimide film.	±2%	-320° to +400°F [-195° to +205°C]
EK	K-alloy foil in combination with a tough, flexible polyimide backing.	±1.5%	-320° to +350°F [-195° to +175°C]
WA	Fully encapsulated constantan gages with high-endurance leadwires.	±2%	-100° to +400°F [-75° to +205°C]
WK	Fully encapsulated K-alloy gages with high-endurance leadwires.	±1.5%	-452° to +550°F [-269° to +290°C]
EP	Annealed constantan foil with tough, high-elongation polyimide backing.	±20%	-100° to +400°F [-75° to +205°C]
SA	Fully encapsulated constantan gages with solder dots.	±2%	-100° to +400°F [-75° to +205°C]
SK	Fully encapsulated K-alloy gages with solder dots.	±1.5%	-452° to +450°F [-269° to +230°C]
SD	Equivalent to WD Series, but with solder dots instead of leadwires.	±1.5%	-320° to +400°F [-195° to +205°C]
WD	Fully encapsulated isoelastic gages with high-endurance leadwires.	±1.5%	-320° to +500°F [-195° to +260°C]

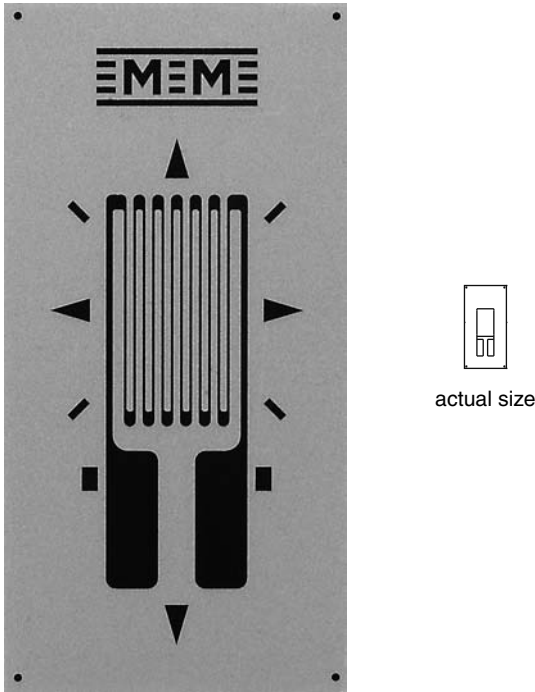
Note 1: Insert desired S-T-C number in spaces marked XX.

Note 2: Tolerance is increased when Option W, E, SE, LE, or P is specified.

Note 3: Products with designations and options shown in bold are not RoHS compliant.

*Options available but not normally recommended. See Optional Features data sheet for details.

General Purpose Strain Gages - Linear Pattern

GAGE PATTERN DATA					
			GAGE DESIGNATION See Note 1, 3	RESISTANCE (OHMS) See Note 2	OPTIONS AVAILABLE See Note 3
			EA-XX-125BB-120 ED-DY-125BB-350 WA-XX-125BB-120 WK-XX-125BB-350 EP-08-125BB-120 SA-XX-125BB-120 SK-XX-125BB-350 SD-DY-125BB-350 WD-DY-125BB-350	120 ± 0.15% 350 ± 0.3% 120 ± 0.3% 350 ± 0.3% 120 ± 0.15% 120 ± 0.3% 350 ± 0.3% 350 ± 0.6% 350 ± 0.6%	E, P E
DESCRIPTION Narrow general-purpose gage with extended tabs.					
GAGE DIMENSIONS		Legend: ES = Each Section S = Section (S1 = Sec 1)		CP = Complete Pattern M = Matrix	
				inch	
				millimeter	
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.125	0.245	0.088	0.088	0.43	0.22
3.18	6.22	2.24	2.24	10.9	5.6

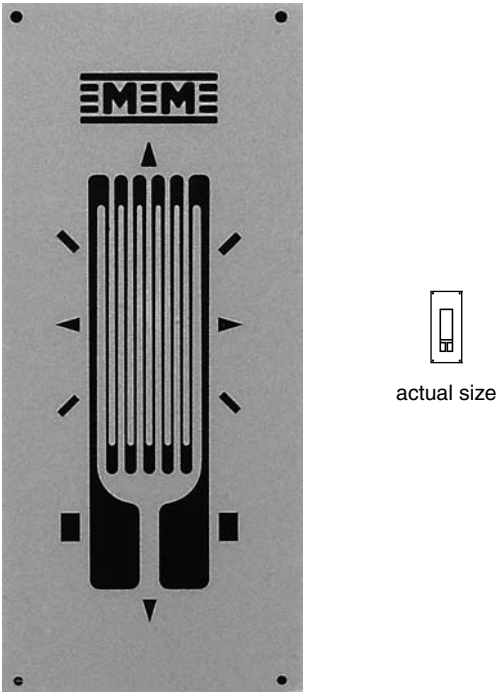
GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
EA	Constantan foil in combination with a tough, flexible, polyimide backing.	±5%	-100° to +350°F [-75° to +175°C]
ED	Isoelastic foil in combination with tough, flexible polyimide film.	±2%	-320° to +400°F [-195° to +205°C]
WA	Fully encapsulated constantan gages with high-endurance leadwires.	±2%	-100° to +400°F [-75° to +205°C]
WK	Fully encapsulated K-alloy gages with high-endurance leadwires.	±1.5%	-452° to +550°F [-269° to +290°C]
EP	Annealed constantan foil with tough, high-elongation polyimide backing.	±20%	-100° to +400°F [-75° to +205°C]
SA	Fully encapsulated constantan gages with solder dots.	±2%	-100° to +400°F [-75° to +205°C]
SK	Fully encapsulated K-alloy gages with solder dots.	±1.5%	-452° to +450°F [-269° to +230°C]
SD	Equivalent to WD Series, but with solder dots instead of leadwires.	±1.5%	-320° to +400°F [-195° to +205°C]
WD	Fully encapsulated isoelastic gages with high-endurance leadwires.	±1.5%	-320° to +500°F [-195° to +260°C]

Note 1: Insert desired S-T-C number in spaces marked XX.

Note 2: Tolerance is increased when Option W, E, SE, LE, or P is specified.

Note 3: Products with designations and options shown in bold are not RoHS compliant.

General Purpose Strain Gages - Linear Pattern

GAGE PATTERN DATA					
 <p>actual size</p>			GAGE DESIGNATION See Note 1, 3	RESISTANCE (OHMS) See Note 2	OPTIONS AVAILABLE See Note 3
			EA-XX-125BT-120 ED-DY-125BT-350 WA-XX-125BT-120 WK-XX-125BT-350 EP-08-125BT-120 SA-XX-125BT-120 SK-XX-125BT-350 SD-DY-125BT-350 WD-DY-125BT-350	120 ± 0.15% 350 ± 0.3% 120 ± 0.3% 350 ± 0.3% 120 ± 0.15% 120 ± 0.3% 350 ± 0.3% 350 ± 0.6% 350 ± 0.6%	W, E, L, LE, P E, L*, LE* W* W*
DESCRIPTION General-purpose gage with narrow grid and compact geometry. See also 125BZ pattern.					
GAGE DIMENSIONS		Legend: ES = Each Section S = Section (S1 = Sec 1)		CP = Complete Pattern M = Matrix	
				inch	millimeter
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.125	0.215	0.062	0.062	0.37	0.16
3.18	5.46	1.57	1.57	9.4	4.1

GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
EA	Constantan foil in combination with a tough, flexible, polyimide backing.	±5%	-100° to +350°F [-75° to +175°C]
ED	Isoelastic foil in combination with tough, flexible polyimide film.	±2%	-320° to +400°F [-195° to +205°C]
WA	Fully encapsulated constantan gages with high-endurance leadwires.	±2%	-100° to +400°F [-75° to +205°C]
WK	Fully encapsulated K-alloy gages with high-endurance leadwires.	±1.5%	-452° to +550°F [-269° to +290°C]
EP	Annealed constantan foil with tough, high-elongation polyimide backing.	±20%	-100° to +400°F [-75° to +205°C]
SA	Fully encapsulated constantan gages with solder dots.	±2%	-100° to +400°F [-75° to +205°C]
SK	Fully encapsulated K-alloy gages with solder dots.	±1.5%	-452° to +450°F [-269° to +230°C]
SD	Equivalent to WD Series, but with solder dots instead of leadwires.	±1.5%	-320° to +400°F [-195° to +205°C]
WD	Fully encapsulated isoelastic gages with high-endurance leadwires.	±1.5%	-320° to +500°F [-195° to +260°C]

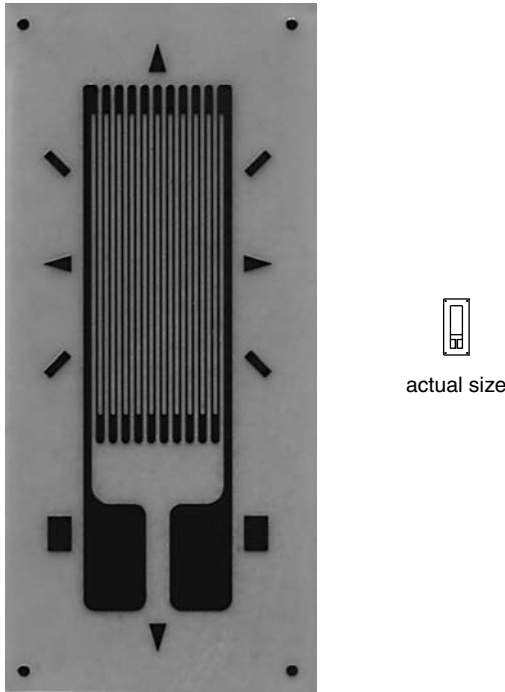
Note 1: Insert desired S-T-C number in spaces marked XX.

Note 2: Tolerance is increased when Option W, E, SE, LE, or P is specified.

Note 3: Products with designations and options shown in bold are not RoHS compliant.

*Options available but not normally recommended. See Optional Features data sheet for details.

General Purpose Strain Gages - Linear Pattern

GAGE PATTERN DATA					
			GAGE DESIGNATION See Note 1, 3	RESISTANCE (OHMS) See Note 2	OPTIONS AVAILABLE See Note 3
			EA-XX-125BZ-350 ED-DY-125BZ-10C EK-XX-125BZ-10C WA-XX-125BZ-350 WK-XX-125BZ-10C SA-XX-125BZ-350 SK-XX-125BZ-10C SD-DY-125BZ-10C WD-DY-125BZ-10C	350 ± 0.15% 1000 ± 0.4% 1000 ± 0.15% 350 ± 0.3% 1000 ± 0.3% 350 ± 0.3% 1000 ± 0.3% 1000 ± 0.8% 1000 ± 0.8%	W, E, L, LE, P E, L*, LE* W* W*
DESCRIPTION Narrow high-resistance gage with compact geometry. Similar to 125BT pattern except for grid resistance. EK-Series gages are supplied with duplex copper dots (DD) when optional feature W is not specified.					
GAGE DIMENSIONS					
			Legend: ES = Each Section S = Section (S1 = Sec 1)	CP = Complete Pattern M = Matrix	<input type="checkbox"/> inch <input checked="" type="checkbox"/> millimeter
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.125	0.220	0.062	0.062	0.29	0.13
3.18	5.59	1.57	1.57	7.4	3.3

GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
EA	Constantan foil in combination with a tough, flexible, polyimide backing.	±5%	-100° to +350°F [-75° to +175°C]
ED	Isoelastic foil in combination with tough, flexible polyimide film.	±2%	-320° to +400°F [-195° to +205°C]
EK	K-alloy foil in combination with a tough, flexible polyimide backing.	±1.5%	-320° to +350°F [-195° to +175°C]
WA	Fully encapsulated constantan gages with high-endurance leadwires.	±2%	-100° to +400°F [-75° to +205°C]
WK	Fully encapsulated K-alloy gages with high-endurance leadwires.	±1.5%	-452° to +550°F [-269° to +290°C]
SA	Fully encapsulated constantan gages with solder dots.	±2%	-100° to +400°F [-75° to +205°C]
SK	Fully encapsulated K-alloy gages with solder dots.	±1.5%	-452° to +450°F [-269° to +230°C]
SD	Equivalent to WD Series, but with solder dots instead of leadwires.	±1.5%	-320° to +400°F [-195° to +205°C]
WD	Fully encapsulated isoelastic gages with high-endurance leadwires.	±1.5%	-320° to +500°F [-195° to +260°C]

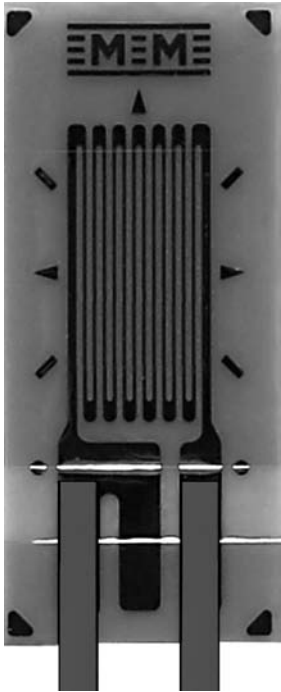


Note 1: Insert desired S-T-C number in spaces marked XX.

Note 2: Tolerance is increased when Option W, E, SE, LE, or P is specified.


Note 3: Products with designations and options shown in bold are not RoHS compliant.

*Options available but not normally recommended. See Optional Features data sheet for details.


General Purpose Strain Gages - Linear Pattern

GAGE PATTERN DATA					
  actual size			GAGE DESIGNATION See Note 1	RESISTANCE (OHMS)	OPTIONS AVAILABLE
			L2A-XX-125LW-120 L2A-XX-125LW-350 C2A-XX-125LW-120 C2A-XX-125LW-350	120 ± 0.6% 350 ± 0.6% 120 ± 0.6% 350 ± 0.6%	
DESCRIPTION Widely used general-purpose gage.				 RoHS COMPLIANT	
GAGE DIMENSIONS			Legend: ES = Each Section S = Section (S1 = Sec 1)	CP = Complete Pattern M = Matrix	<input type="checkbox"/> inch <input type="checkbox"/> millimeter
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.125	0.238	0.070	0.080	0.315	0.170
3.18	6.05	1.78	2.03	8.00	4.32

GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
L2A	Encapsulated constantan gages with preattached ribbon leads.	±3%	-100° to +250°F [-75° to +120°C]
C2A	Encapsulated constantan gages with preattached ready-to-use cables.	±3%	-60° to +180°F [-50° to +80°C]



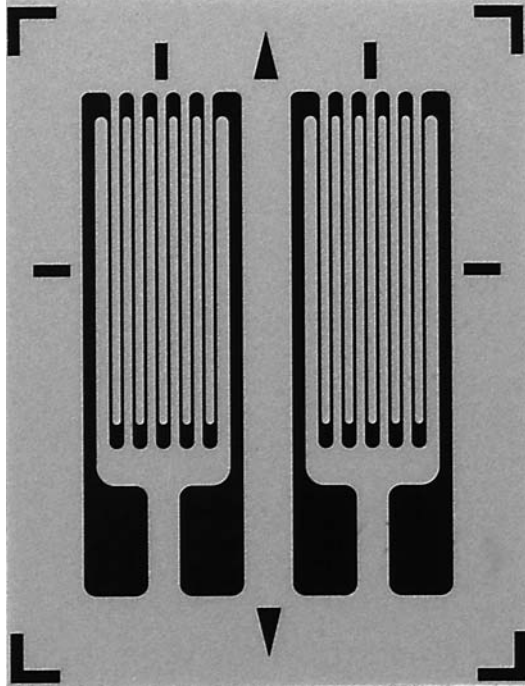
Example of an
L2A Construction



Example of a
C2A Construction

Note 1: Insert desired S-T-C number in spaces marked XX.

General Purpose Strain Gages - Linear Pattern

GAGE PATTERN DATA					
 <p style="text-align: center;">actual size</p>			GAGE DESIGNATION See Note 1, 3	RESISTANCE (OHMS) See Note 2	OPTIONS AVAILABLE See Note 3
			EA-XX-125PC-120 EA-XX-125PC-350 ED-DY-125PC-350 ED-DY-125PC-10C EK-XX-125PC-10C WA-XX-125PC-120 WA-XX-125PC-350 WK-XX-125PC-350 WK-XX-125PC-10C SA-XX-125PC-120 SA-XX-125PC-350 SK-XX-125PC-350 SK-XX-125PC-10C	120 ± 0.2% 350 ± 0.2% 350 ± 0.4% 1000 ± 0.4% 1000 ± 0.2% 120 ± 0.4% 350 ± 0.4% 350 ± 0.4% 1000 ± 0.4% 120 ± 0.4% 350 ± 0.4% 350 ± 0.4% 1000 ± 0.4%	W, E, L, LE W, E, L, LE E E W, SE W* W* W* W*
DESCRIPTION Dual-pattern gage for use in back-to-back bending applications. Longitudinal grid centerlines spaced 0.085 in [2.16 mm] apart. See also 125MG pattern. EK-Series gages are supplied with duplex copper pads (DP) when optional W or SE is not specified.					
GAGE DIMENSIONS			Legend: ES = Each Section S = Section (S1 = Sec 1)	CP = Complete Pattern M = Matrix	<input type="checkbox"/> inch <input type="checkbox"/> millimeter
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.125 ES	0.205 CP	0.065 ES	0.150 CP	0.29	0.23
3.18 ES	5.21 CP	1.65 ES	3.81 CP	7.4	5.8

GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
EA	Constantan foil in combination with a tough, flexible, polyimide backing.	±5%	-100° to +350°F [-75° to +175°C]
ED	Isoelastic foil in combination with tough, flexible polyimide film.	±2%	-320° to +400°F [-195° to +205°C]
EK	K-alloy foil in combination with a tough, flexible polyimide backing.	±1.5%	-320° to +350°F [-195° to +175°C]
WA	Fully encapsulated constantan gages with high-endurance leadwires.	±2%	-100° to +400°F [-75° to +205°C]
WK	Fully encapsulated K-alloy gages with high-endurance leadwires.	±1.5%	-452° to +550°F [-269° to +290°C]
SA	Fully encapsulated constantan gages with solder dots.	±2%	-100° to +400°F [-75° to +205°C]
SK	Fully encapsulated K-alloy gages with solder dots.	±1.5%	-452° to +450°F [-269° to +230°C]

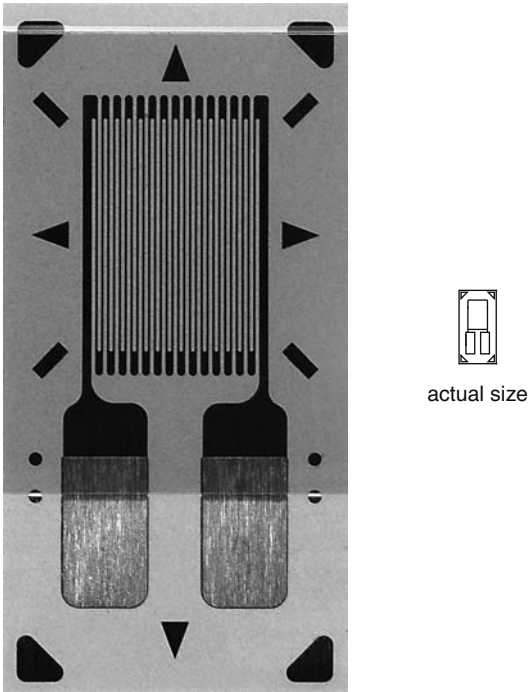
Note 1: Insert desired S-T-C number in spaces marked XX.

Note 2: Tolerance is increased when Option W, E, SE, LE, or P is specified.

Note 3: Products with designations and options shown in bold are not RoHS compliant.

*Options available but not normally recommended. See Optional Features data sheet for details.

General Purpose Strain Gages - Linear Pattern

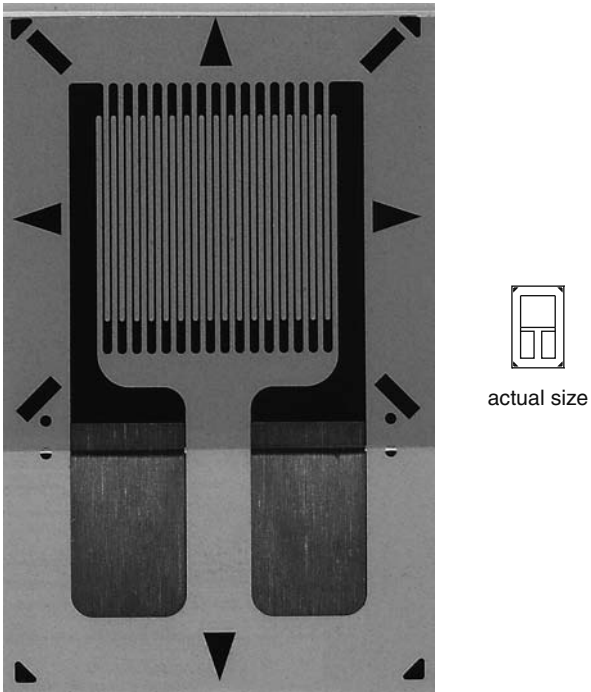
GAGE PATTERN DATA					
			GAGE DESIGNATION	RESISTANCE (OHMS)	OPTIONS AVAILABLE
			See Note 1		See Note 2
			CEA-XX-125UN-120 CEA-XX-125UN-350	120 ± 0.3% 350 ± 0.3%	P2 P2
DESCRIPTION					
General-purpose gage with narrow geometry. Exposed solder tab area 0.06 x 0.05 in [1.5 x 1.1 mm]. See also 125UW pattern.					
GAGE DIMENSIONS		Legend: ES = Each Section S = Section (S1 = Sec 1)		CP = Complete Pattern M = Matrix	<input type="checkbox"/> inch <input checked="" type="checkbox"/> millimeter
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.125	0.275	0.100	0.120	0.38	0.19
3.18	6.99	2.54	3.05	9.7	4.8

GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
CEA	Universal general-purpose strain gages.	±5%	-100° to +350°F [-75° to +175°C]

Note 1: Insert desired S-T-C number in spaces marked XX.

Note 2: Products with designations and options shown in bold are not RoHS compliant.

General Purpose Strain Gages - Linear Pattern

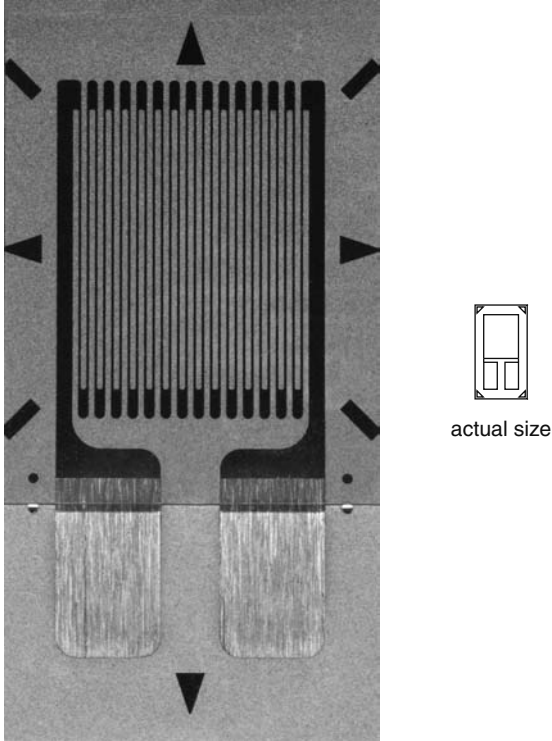
GAGE PATTERN DATA					
			GAGE DESIGNATION See Note 1	RESISTANCE (OHMS)	OPTIONS AVAILABLE See Note 2
			CEA-XX-125UW-120 CEA-XX-125UW-350	120 ± 0.3% 350 ± 0.3%	P2 P2
DESCRIPTION General-purpose gage. Exposed solder tab area 0.10 x 0.07 [2.5 x 1.8 mm]. See also 125UN pattern.					
GAGE DIMENSIONS		Legend: ES = Each Section S = Section (S1 = Sec 1)		CP = Complete Pattern M = Matrix	
				<input type="checkbox"/> inch	<input type="checkbox"/> millimeter
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.125	0.325	0.180	0.180	0.42	0.27
3.18	8.26	4.57	4.57	10.7	6.9

GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
CEA	Universal general-purpose strain gages.	±5%	-100° to +350°F [-75° to +175°C]

Note 1: Insert desired S-T-C number in spaces marked XX.

Note 2: Products with designations and options shown in bold are not RoHS compliant.

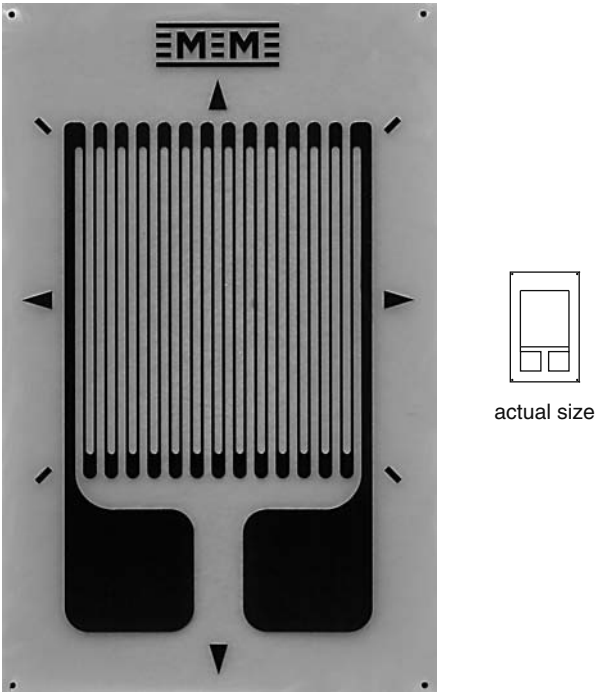
General Purpose Strain Gages - Linear Pattern

GAGE PATTERN DATA					
			GAGE DESIGNATION See Note 1	RESISTANCE (OHMS)	OPTIONS AVAILABLE See Note 2
			CEA-XX-187UW-120 CEA-XX-187UW-350	120 ± 0.3% 350 ± 0.3%	P2 P2
DESCRIPTION General-purpose gage. Exposed solder tab area 0.10 x 0.07 in (2.5 x 1.8 mm).					
GAGE DIMENSIONS		Legend: ES = Each Section S = Section (S1 = Sec 1)		CP = Complete Pattern M = Matrix	
				<input type="checkbox"/> inch <input checked="" type="checkbox"/> millimeter	
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.187	0.387	0.180	0.180	0.49	0.27
4.75	9.83	4.57	4.57	12.4	6.9
GAGE SERIES DATA					
See Gage Series data sheet for complete specifications.					
Series	Description	Strain Range	Temperature Range		
CEA	Universal general-purpose strain gages.	±5%	-100° to +350°F (-75° to +175°C)		

Note 1: Insert desired S-T-C number in spaces marked XX.

Note 2: Products with designations and options shown in bold are not RoHS compliant.

General Purpose Strain Gages - Linear Pattern

GAGE PATTERN DATA					
 <p>actual size</p>			GAGE DESIGNATION See Note 1, 3	RESISTANCE (OHMS) See Note 2	OPTIONS AVAILABLE See Note 3
			EA-XX-250AE-350 ED-DY-250AE-10C WA-XX-250AE-350 WK-XX-250AE-10C EP-08-250AE-350 SA-XX-250AE-350 SK-XX-250AE-10C SD-DY-250AE-10C WD-DY-250AE-10C	350 ± 0.15% 1000 ± 0.3% 350 ± 0.3% 1000 ± 0.3% 350 ± 0.15% 350 ± 0.3% 1000 ± 0.3% 1000 ± 0.6% 1000 ± 0.6%	W, E, L, LE, P E, L*, LE* W* W*
DESCRIPTION General-purpose gage with high-dissipation grid. See also 250AF pattern.					
GAGE DIMENSIONS					
Legend:			ES = Each Section	CP = Complete Pattern	inch
			S = Section (S1 = Sec 1)	M = Matrix	millimeter
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.250	0.415	0.250	0.250	0.57	0.36
6.35	10.54	6.35	6.35	14.5	9.1

GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
EA	Constantan foil in combination with a tough, flexible, polyimide backing.	±5%	-100° to +350°F [-75° to +175°C]
ED	Isoelastic foil in combination with tough, flexible polyimide film.	±2%	-320° to +400°F [-195° to +205°C]
WA	Fully encapsulated constantan gages with high-endurance leadwires.	±2%	-100° to +400°F [-75° to +205°C]
WK	Fully encapsulated K-alloy gages with high-endurance leadwires.	±1.5%	-452° to +550°F [-269° to +290°C]
EP	Annealed constantan foil with tough, high-elongation polyimide backing.	±20%	-100° to +400°F [-75° to +205°C]
SA	Fully encapsulated constantan gages with solder dots.	±2%	-100° to +400°F [-75° to +205°C]
SK	Fully encapsulated K-alloy gages with solder dots.	±1.5%	-452° to +450°F [-269° to +230°C]
SD	Equivalent to WD Series, but with solder dots instead of leadwires.	±1.5%	-320° to +400°F [-195° to +205°C]
WD	Fully encapsulated isoelastic gages with high-endurance leadwires.	±1.5%	-320° to +500°F [-195° to +260°C]

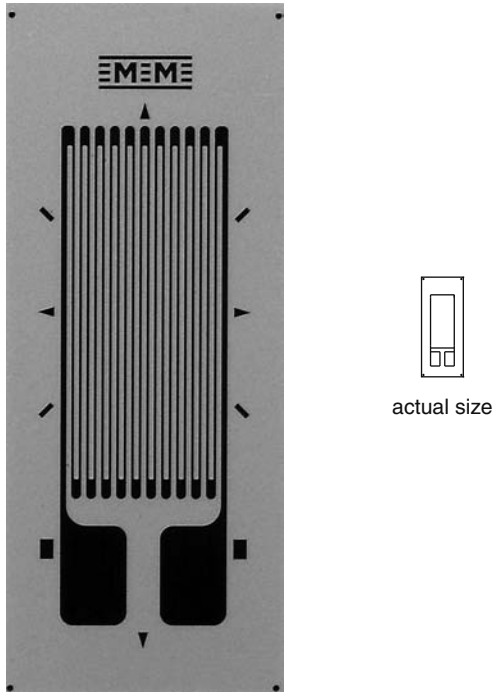
Note 1: Insert desired S-T-C number in spaces marked XX.

Note 2: Tolerance is increased when Option W, E, SE, LE, or P is specified.

Note 3: Products with designations and options shown in bold are not RoHS compliant.

*Options available but not normally recommended. See Optional Features data sheet for details.

General Purpose Strain Gage - Linear Pattern

GAGE PATTERN DATA							
			GAGE DESIGNATION	RESISTANCE (OHMS)	OPTIONS AVAILABLE		
			See Note 1, 3	See Note 2	See Note 3		
			EA-XX-250BF-350 ED-DY-250BF-10C EK-XX-250BF-10C S2K-XX-250BF-10C WA-XX-250BF-350 WK-XX-250BF-10C EP-08-250BF-350 SA-XX-250BF-350 SK-XX-250BF-10C SD-DY-250BF-10C WD-DY-250BF-10C	350 ± 0.15% 1000 ± 0.3% 1000 ± 0.15% 1000 ± 0.3% 350 ± 0.3% 1000 ± 0.3% 350 ± 0.15% 350 ± 0.3% 1000 ± 0.3% 1000 ± 0.6% 1000 ± 0.6%	W, E, L, LE, P E, L*, LE* W, SE W*		
DESCRIPTION							
General-purpose gage with high-resistance grid. Compact geometry. Similar to 250BG pattern except for resistance. See also 250BM and 250UW patterns. EK-Series gages are supplied with duplex copper pads (DP) when optional feature W or SE is not specified.							
GAGE DIMENSIONS		Legend: ES = Each Section S = Section (S1 = Sec 1)		CP = Complete Pattern M = Matrix	<table border="1"> <tr><td>inch</td></tr> <tr><td>millimeter</td></tr> </table>	inch	millimeter
inch							
millimeter							
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width		
0.250	0.375	0.125	0.125	0.52	0.22		
6.35	9.53	3.18	3.18	13.2	5.6		

GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
EA	Constantan foil in combination with a tough, flexible, polyimide backing.	±5%	-100° to +350°F [-75° to +175°C]
ED	Isoelastic foil in combination with tough, flexible polyimide film.	±2%	-320° to +400°F [-195° to +205°C]
EK	K-alloy foil in combination with a tough, flexible polyimide backing.	±1.5%	-320° to +350°F [-195° to +175°C]
S2K	K-alloy foil with laminated thick, high-performance polyimide backing.	±1.5%	-100° to +250°F [-75° to +120°C]
WA	Fully encapsulated constantan gages with high-endurance leadwires.	±2%	-100° to +400°F [-75° to +205°C]
WK	Fully encapsulated K-alloy gages with high-endurance leadwires.	±1.5%	-452° to +550°F [-269° to +290°C]
EP	Annealed constantan foil with tough, high-elongation polyimide backing.	±20%	-100° to +400°F [-75° to +205°C]
SA	Fully encapsulated constantan gages with solder dots.	±2%	-100° to +400°F [-75° to +205°C]
SK	Fully encapsulated K-alloy gages with solder dots.	±1.5%	-452° to +450°F [-269° to +230°C]
SD	Equivalent to WD Series, but with solder dots instead of leadwires.	±1.5%	-320° to +400°F [-195° to +205°C]
WD	Fully encapsulated isoelastic gages with high-endurance leadwires.	±1.5%	-320° to +500°F [-195° to +260°C]

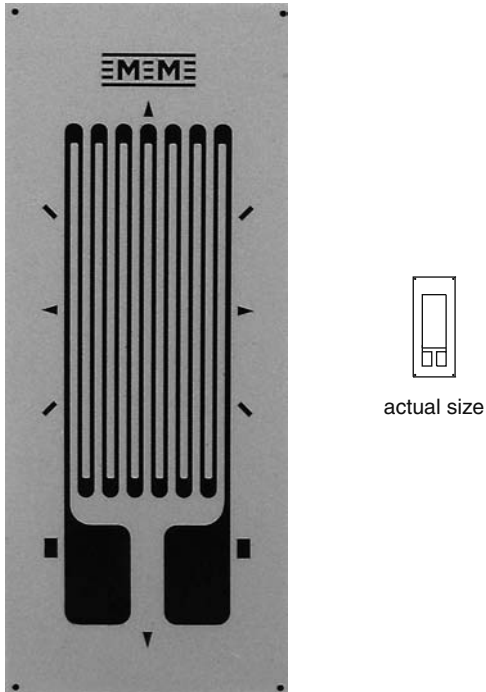
Note 1: Insert desired S-T-C number in spaces marked XX.

Note 2: Tolerance is increased when Option W, E, SE, LE, or P is specified.

Note 3: Products with designations and options shown in bold are not RoHS compliant.

*Options available but not normally recommended. See Optional Features data sheet for details.

General Purpose Strain Gages - Linear Pattern

GAGE PATTERN DATA					
			GAGE DESIGNATION See Note 1, 3	RESISTANCE (OHMS) See Note 2	OPTIONS AVAILABLE See Note 3
			EA-XX-250BG-120 ED-DY-250BG-350 WA-XX-250BG-120 WK-XX-250BG-350 EA-XX-250BG-100 EP-XX-250BG-120 SA-XX-250BG-120 SK-XX-250BG-350 SD-DY-250BG-350 WD-DY-250BG-350	120 ± 0.15% 350 ± 0.3% 120 ± 0.3% 350 ± 0.3% 100 ± 0.15% 120 ± 0.15% 120 ± 0.3% 350 ± 0.3% 350 ± 0.6% 350 ± 0.6%	W, E, L, LE, P E, L*, LE* W* W*
DESCRIPTION Widely used general-purpose gage. Compact geometry. See also 250UN pattern.					
GAGE DIMENSIONS					
			Legend: ES = Each Section S = Section (S1 = Sec 1)	CP = Complete Pattern M = Matrix	<input type="checkbox"/> inch <input checked="" type="checkbox"/> millimeter
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.250	0.375	0.125	0.125	0.52	0.22
6.35	9.53	3.18	3.18	13.2	5.6

GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
EA	Constantan foil in combination with a tough, flexible, polyimide backing.	±5%	-100° to +350°F [-75° to +175°C]
ED	Isoelastic foil in combination with tough, flexible polyimide film.	±2%	-320° to +400°F [-195° to +205°C]
WA	Fully encapsulated constantan gages with high-endurance leadwires.	±2%	-100° to +400°F [-75° to +205°C]
WK	Fully encapsulated K-alloy gages with high-endurance leadwires.	±1.5%	-452° to +550°F [-269° to +290°C]
EP	Annealed constantan foil with tough, high-elongation polyimide backing.	±20%	-100° to +400°F [-75° to +205°C]
SA	Fully encapsulated constantan gages with solder dots.	±2%	-100° to +400°F [-75° to +205°C]
SK	Fully encapsulated K-alloy gages with solder dots.	±1.5%	-452° to +450°F [-269° to +230°C]
SD	Equivalent to WD Series, but with solder dots instead of leadwires.	±1.5%	-320° to +400°F [-195° to +205°C]
WD	Fully encapsulated isoelastic gages with high-endurance leadwires.	±1.5%	-320° to +500°F [-195° to +260°C]

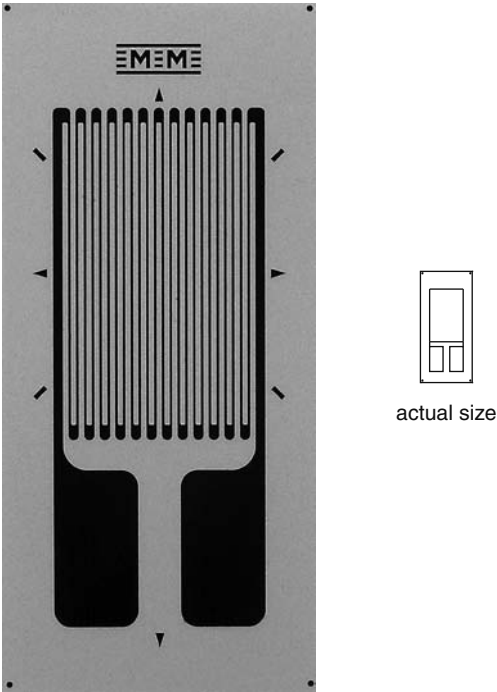
Note 1: Insert desired S-T-C number in spaces marked XX.

Note 2: Tolerance is increased when Option W, E, SE, LE, or P is specified.

Note 3: Products with designations and options shown in bold are not RoHS compliant.

*Options available but not normally recommended. See Optional Features data sheet for details.

General Purpose Strain Gage - Linear Pattern

GAGE PATTERN DATA						
 <p>actual size</p>			GAGE DESIGNATION See Note 1, 3	RESISTANCE (OHMS) See Note 2	OPTIONS AVAILABLE See Note 3	
			EA-XX-250BK-10C WA-XX-250BK-10C WK-XX-250BK-30C SA-XX-250BK-10C SK-XX-250BK-30C	1000 ± 0.15% 1000 ± 0.3% 3000 ± 0.3% 1000 ± 0.3% 3000 ± 0.3%	W, E, L, LE, P W* W*	
DESCRIPTION High-resistance gage with good power dissipation capability for high-output applications or use on plastics.						
GAGE DIMENSIONS						
			Legend: ES = Each Section S = Section (S1 = Sec 1)	CP = Complete Pattern M = Matrix	<input type="checkbox"/> inch <input type="checkbox"/> millimeter	
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width	
0.250	0.430	0.175	0.175	0.58	0.27	
6.35	10.92	4.45	4.45	14.7	6.9	

GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
EA	Constantan foil in combination with a tough, flexible, polyimide backing.	±5%	-100° to +350°F [-75° to +175°C]
WA	Fully encapsulated constantan gages with high-endurance leadwires.	±2%	-100° to +400°F [-75° to +205°C]
WK	Fully encapsulated K-alloy gages with high-endurance leadwires.	±1.5%	-452° to +550°F [-269° to +290°C]
SA	Fully encapsulated constantan gages with solder dots.	±2%	-100° to +400°F [-75° to +205°C]
SK	Fully encapsulated K-alloy gages with solder dots.	±1.5%	-452° to +450°F [-269° to +230°C]

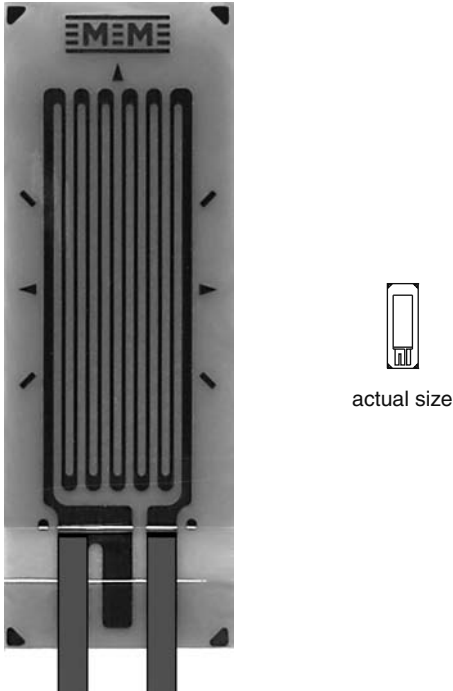

Note 1: Insert desired S-T-C number in spaces marked XX.



Note 2: Tolerance is increased when Option W, E, SE, LE, or P is specified.

Note 3: Products with designations and options shown in bold are not RoHS compliant.

*Options available but not normally recommended. See Optional Features data sheet for details.

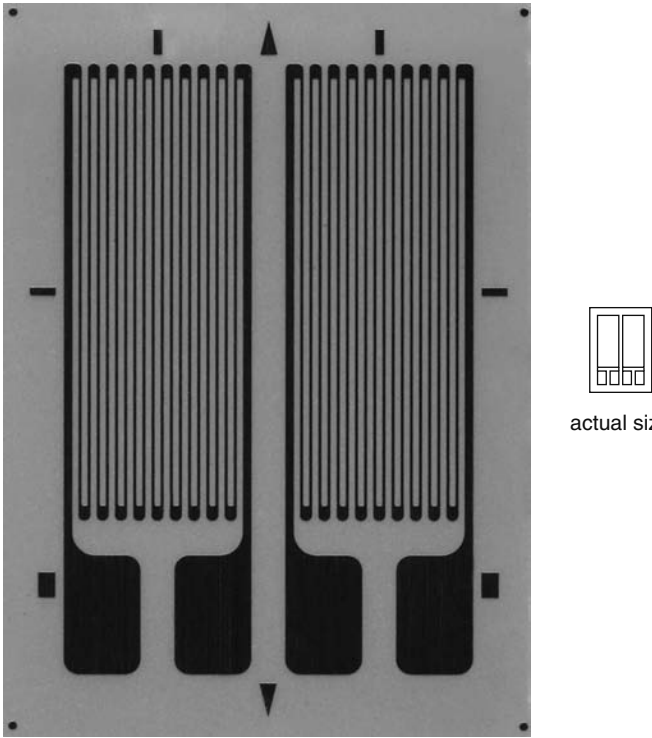
General Purpose Strain Gages - Linear Pattern

GAGE PATTERN DATA					
			GAGE DESIGNATION See Note 1	RESISTANCE (OHMS)	OPTIONS AVAILABLE
			L2A-XX-250LW-120 L2A-XX-250LW-350 C2A-XX-250LW-120 C2A-XX-250LW-350	120 ± 0.6% 350 ± 0.6% 120 ± 0.6% 350 ± 0.6%	
DESCRIPTION Widely used general-purpose gage.					
GAGE DIMENSIONS			Legend: ES = Each Section S = Section (S1 = Sec 1)	CP = Complete Pattern M = Matrix	<input type="checkbox"/> inch <input type="checkbox"/> millimeter
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.250	0.363	0.100	0.100	0.440	0.170
6.35	9.22	2.54	2.54	11.18	4.32

GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
L2A	Encapsulated constantan gages with preattached ribbon leads.	±3%	-100° to +250°F [-75° to +120°C]
C2A	Encapsulated constantan gages with preattached ready-to-use cables.	±3%	-60° to +180°F [-50° to +80°C]
 Example of an L2A Construction		 Example of a C2A Construction	

Note 1: Insert desired S-T-C number in spaces marked XX.

General Purpose Strain Gages - Linear Pattern

GAGE PATTERN DATA							
				GAGE DESIGNATION	RESISTANCE (OHMS)	OPTIONS AVAILABLE	
				See Note 1, 3	See Note 2	See Note 3	
				EA-XX-250PD-120	120 ± 0.2%	W, E, L, LE W, E, L, LE E W, SE W* W* W* W*	
				EA-XX-250PD-350	350 ± 0.2%		
				ED-DY-250PD-350	350 ± 0.4%		
				EK-XX-250PD-10C	1000 ± 0.2%		
				S2K-XX-250PD-10C	1000 ± 0.4%		
				WA-XX-250PD-120	120 ± 0.3%		
				WA-XX-250PD-350	350 ± 0.3%		
				WK-XX-250PD-350	350 ± 0.4%		
				WK-XX-250PD-10C	1000 ± 0.4%		
				SA-XX-250PD-120	120 ± 0.4%		
				SA-XX-250PD-350	350 ± 0.4%		
				SK-XX-250PD-350	350 ± 0.4%		
				SK-XX-250PD-10C	1000 ± 0.4%		
				SD-DY-250PD-350	350 ± 0.8%		
				WD-DY-250PD-350	350 ± 0.8%		
DESCRIPTION							
Dual-element pattern with longitudinal grid centerlines spaced 0.130 in [3.30 mm] apart. See also 250MQ pattern. EK-Series gages are supplied with duplex copper pads (DP) when optional feature W or SE is not specified.							
GAGE DIMENSIONS			Legend: ES = Each Section S = Section (S1 = Sec 1)	CP = Complete Pattern M = Matrix	<table border="1"> <tr><td>inch</td></tr> <tr><td>millimeter</td></tr> </table>	inch	millimeter
inch							
millimeter							
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width		
0.250 ES	0.358 CP	0.110 ES	0.240 CP	0.44	0.32		
6.35 ES	9.09 CP	2.79 ES	6.10 CP	11.2	8.1		

GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
EA	Constantan foil in combination with a tough, flexible, polyimide backing.	±5%	-100° to +350°F (-75° to +175°C)
ED	Isoelastic foil in combination with tough, flexible polyimide film.	±2%	-320° to +400°F (-195° to +205°C)
EK	K-alloy foil in combination with a tough, flexible polyimide backing.	±1.5%	-320° to +350°F (-195° to +175°C)
S2K	K-alloy foil with laminated thick, high-performance polyimide backing.	±1.5%	-100° to +250°F (-75° to +120°C)
WA	Fully encapsulated constantan gages with high-endurance leadwires.	±2%	-100° to +400°F (-75° to +205°C)
WK	Fully encapsulated K-alloy gages with high-endurance leadwires.	±1.5%	-452° to +550°F (-269° to +290°C)
SA	Fully encapsulated constantan gages with solder dots.	±2%	-100° to +400°F (-75° to +205°C)
SK	Fully encapsulated K-alloy gages with solder dots.	±1.5%	-452° to +450°F (-269° to +230°C)
SD	Equivalent to WD Series, but with solder dots instead of leadwires.	±1.5%	-320° to +400°F (-195° to +205°C)
WD	Fully encapsulated isoelastic gages with high-endurance leadwires.	±1.5%	-320° to +500°F (-195° to +260°C)

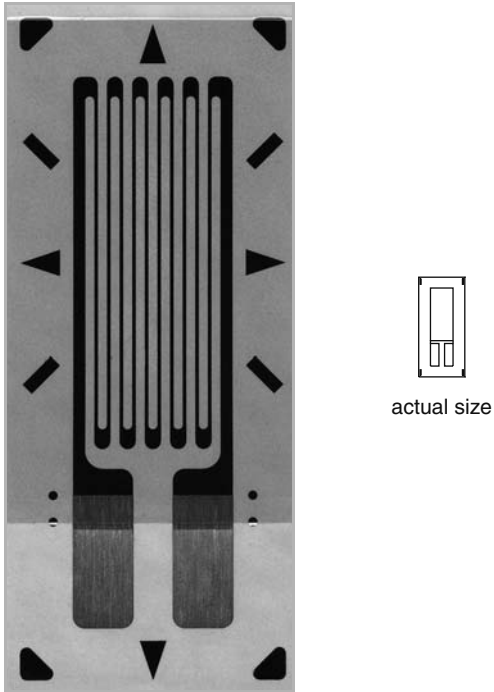
Note 1: Insert desired S-T-C number in spaces marked XX.

Note 2: Tolerance is increased when Option W, E, SE, LE, or P is specified.

Note 3: Products with designations and options shown in bold are not RoHS compliant.

*Options available but not normally recommended. See Optional Features data sheet for details.

General Purpose Strain Gages - Linear Pattern

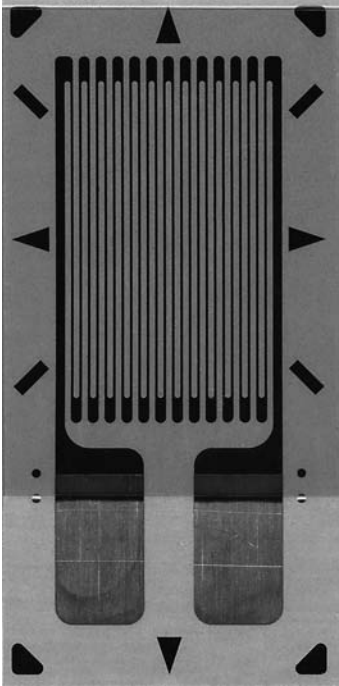

GAGE PATTERN DATA					
			GAGE DESIGNATION See Note 1	RESISTANCE (OHMS)	OPTIONS AVAILABLE See Note 2
			CEA-XX-250UN-120 CEA-XX-250UN-350	120 ± 0.3% 350 ± 0.3%	P2 P2
DESCRIPTION General-purpose gage with narrow geometry. Exposed solder tab area 0.08 x 0.05 in [2.0 x 1.1 mm]. See also 250UW pattern.					
GAGE DIMENSIONS		Legend: ES = Each Section S = Section (S1 = Sec 1)		CP = Complete Pattern M = Matrix	
				<input type="checkbox"/> inch	<input type="checkbox"/> millimeter
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.250	0.415	0.120	0.120	0.52	0.22
6.35	10.54	3.05	3.05	13.2	5.6

GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
CEA	Universal general-purpose strain gages.	±5%	-100° to +350°F [-75° to +175°C]

Note 1: Insert desired S-T-C number in spaces marked XX.

Note 2: Products with designations and options shown in bold are not RoHS compliant.

General Purpose Strain Gages - Linear Pattern

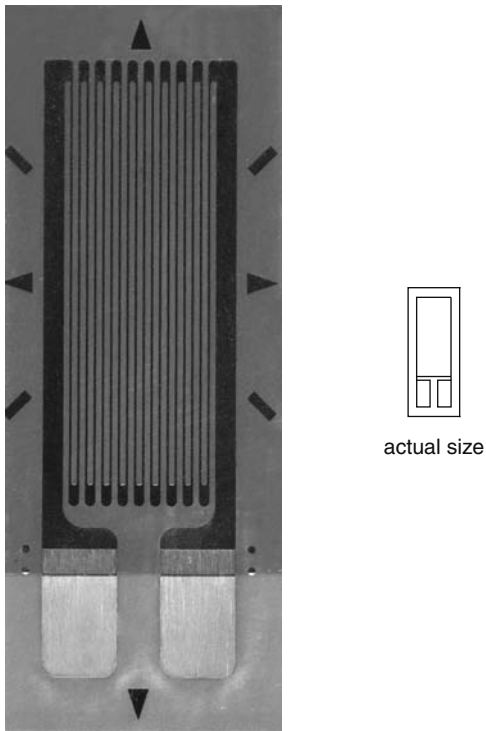
GAGE PATTERN DATA					
  actual size			GAGE DESIGNATION See Note 1	RESISTANCE (OHMS)	OPTIONS AVAILABLE See Note 2
			CEA-XX-250UW-120 CEA-XX-250UW-175 CEA-XX-250UW-350 CEA-XX-250UW-10C	120 ± 0.3% 175 ± 0.3% 350 ± 0.3% 1000 ± 0.3%	P2 P2 P2 P2
DESCRIPTION General-purpose gage. Exposed solder tab area 0.10 x 0.07 in [2.5 x 1.8mm]. See also 250UN pattern.					
GAGE DIMENSIONS			Legend: ES = Each Section S = Section (S1 = Sec 1)	CP = Complete Pattern M = Matrix	<input type="checkbox"/> inch <input checked="" type="checkbox"/> millimeter
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.250	0.450	0.180	0.180	0.55	0.27
6.35	11.43	4.57	4.57	14.0	6.9

GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
CEA	Universal general-purpose strain gages.	±5%	-100° to +350°F [-75° to +175°C]

Note 1: Insert desired S-T-C number in spaces marked XX.

Note 2: Products with designations and options shown in bold are not RoHS compliant.

General Purpose Strain Gages - Linear Pattern

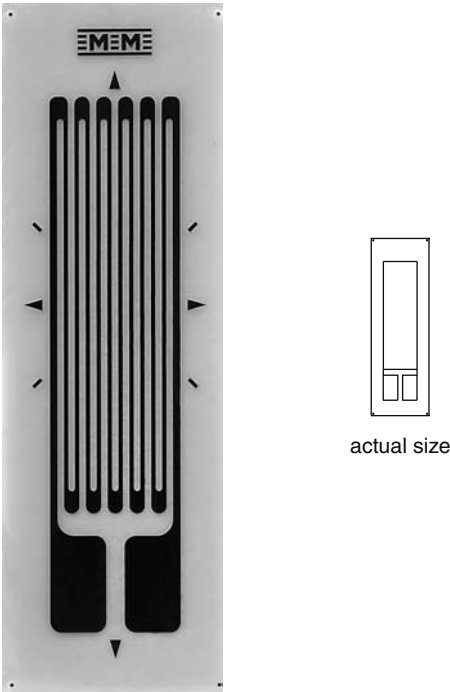
GAGE PATTERN DATA																							
				GAGE DESIGNATION See Note 1	RESISTANCE (OHMS) 120 ± 0.3% 350 ± 0.3%	OPTIONS AVAILABLE See Note 2																	
				CEA-XX-375UW-120 CEA-XX-375UW-350	P2 P2	DESCRIPTION General-purpose gage. Exposed solder tab area 0.10 x 0.07 in (2.5 x 1.8 mm).																	
GAGE DIMENSIONS																							
Legend: ES = Each Section CP = Complete Pattern S = Section (S1 = Sec 1) M = Matrix																							
<table border="1" style="width: 100%; text-align: center;"> <tr> <td style="width: 16.6%;">Gage Length</td> <td style="width: 16.6%;">Overall Length</td> <td style="width: 16.6%;">Grid Width</td> <td style="width: 16.6%;">Overall Width</td> <td style="width: 16.6%;">Matrix Length</td> <td style="width: 16.6%;">Matrix Width</td> </tr> <tr> <td>0.375</td> <td>0.575</td> <td>0.180</td> <td>0.180</td> <td>0.67</td> <td>0.27</td> </tr> <tr> <td>9.53</td> <td>14.61</td> <td>4.57</td> <td>4.57</td> <td>17.0</td> <td>6.9</td> </tr> </table>						Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width	0.375	0.575	0.180	0.180	0.67	0.27	9.53	14.61	4.57	4.57	17.0	6.9
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width																		
0.375	0.575	0.180	0.180	0.67	0.27																		
9.53	14.61	4.57	4.57	17.0	6.9																		

GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
CEA	Universal general-purpose strain gages.	±5%	-100° to +350°F (-75° to +175°C)

Note 1: Insert desired S-T-C number in spaces marked XX.

Note 2: Products with designations and options shown in bold are not RoHS compliant.

General Purpose Sensor - Linear Pattern

GAGE PATTERN DATA					
			GAGE DESIGNATION See Note 1, 3	RESISTANCE (OHMS) See Note 2	OPTIONS AVAILABLE See Note 3
			EA-XX-500BH-120 ED-DY-500BH-350 WA-XX-500BH-120 WK-XX-500BH-350 EP-08-500BH-120 SA-XX-500BH-120 SK-XX-500BH-350 SD-DY-500BH-350 WD-DY-500BH-350	120 ± 0.15% 350 ± 0.3% 120 ± 0.3% 350 ± 0.3% 120 ± 0.15% 120 ± 0.3% 350 ± 0.3% 350 ± 0.6% 350 ± 0.6%	W, E, L, LE, P E, L*, LE* W* W*
DESCRIPTION Widely used general-purpose gage with compact geometry. See also 500BL and 500UW patterns.					
GAGE DIMENSIONS			Legend: ES = Each Section S = Section (S1 = Sec 1)	CP = Complete Pattern M = Matrix	<input type="checkbox"/> inch <input checked="" type="checkbox"/> millimeter
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.500	0.720	0.175	0.175	0.92	0.30
12.70	18.29	4.45	4.45	23.4	7.6

GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
EA	Constantan foil in combination with a tough, flexible, polyimide backing.	±5%	-100° to +350°F [-75° to +175°C]
ED	Isoelastic foil in combination with tough, flexible polyimide film.	±2%	-320° to +400°F [-195° to +205°C]
WA	Fully encapsulated constantan gages with high-endurance leadwires.	±2%	-100° to +400°F [-75° to +205°C]
WK	Fully encapsulated K-alloy gages with high-endurance leadwires.	±1.5%	-452° to +550°F [-269° to +290°C]
EP	Annealed constantan foil with tough, high-elongation polyimide backing.	±20%	-100° to +400°F [-75° to +205°C]
SA	Fully encapsulated constantan gages with solder dots.	±2%	-100° to +400°F [-75° to +205°C]
SK	Fully encapsulated K-alloy gages with solder dots.	±1.5%	-452° to +450°F [-269° to +230°C]
SD	Equivalent to WD Series, but with solder dots instead of leadwires.	±1.5%	-320° to +400°F [-195° to +205°C]
WD	Fully encapsulated isoelastic gages with high-endurance leadwires.	±1.5%	-320° to +500°F [-195° to +260°C]

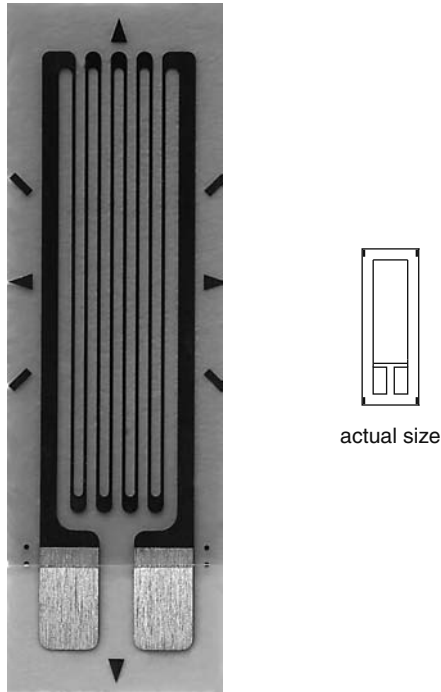
Note 1: Insert desired S-T-C number in spaces marked XX.

Note 2: Tolerance is increased when Option W, E, SE, LE, or P is specified.

Note 3: Products with designations and options shown in bold are not RoHS compliant.

*Options available but not normally recommended. See Optional Features data sheet for details.

General Purpose Sensor - Linear Pattern

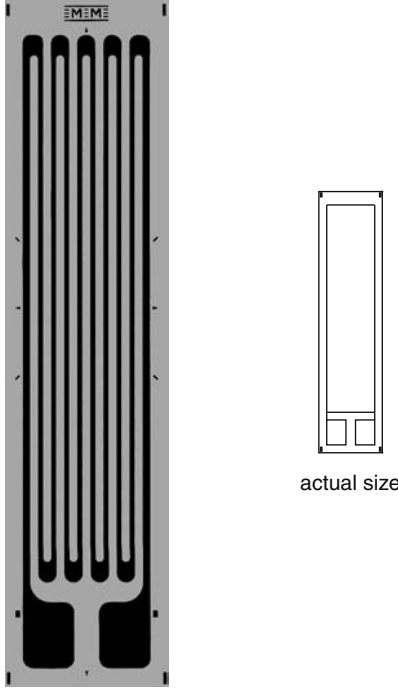
GAGE PATTERN DATA					
			GAGE DESIGNATION	RESISTANCE (OHMS)	OPTIONS AVAILABLE
			See Note 1		See Note 2
			CEA-XX-500UW-120 CEA-XX-500UW-350	120 ± 0.3% 350 ± 0.3%	P2 P2
DESCRIPTION					
General-purpose gage. Exposed solder tab area 0.10 x 0.07 in [2.5 x 1.8 mm].					
GAGE DIMENSIONS		Legend: ES = Each Section S = Section (S1 = Sec 1)		CP = Complete Pattern M = Matrix	
				inch	millimeter
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.500	0.700	0.180	0.180	0.80	0.27
12.70	17.78	4.57	4.57	20.3	6.9

GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
CEA	Universal general-purpose strain gages.	±5%	-100° to +350°F [-75° to +175°C]

Note 1: Insert desired S-T-C number in spaces marked XX.

Note 2: Products with designations and options shown in bold are not RoHS compliant.

General Purpose Strain Gages - Linear Pattern

GAGE PATTERN DATA					
 <p>actual size</p>			GAGE DESIGNATION See Note 1, 3	RESISTANCE (OHMS) See Note 2	OPTIONS AVAILABLE See Note 3
			N2A-XX-10CBE-120 N2A-XX-10CBE-350 EA-XX-10CBE-120 WA-XX-10CBE-120 WK-XX-10CBE-350 EP-XX-10CBE-120 SA-XX-10CBE-120 SK-XX-10CBE-350	120 ± 0.15% 350 ± 0.15% 120 ± 0.15% 120 ± 0.3% 350 ± 0.3% 120 ± 0.15% 120 ± 0.3% 350 ± 0.3%	W, E, L, LE, P W, E, L, LE, P W, E, L, LE, P W* W*
DESCRIPTION Large general-purpose gage.					
GAGE DIMENSIONS					
Legend:			ES = Each Section	CP = Complete Pattern	inch
			S = Section (S1 = Sec 1)	M = Matrix	millimeter
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
1.000	1.250	0.250	0.250	1.36	0.33
25.40	31.75	6.35	6.35	34.5	8.4

GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
N2A	Constantan foil gages with a thin, laminated, polyimide-film backing.	±3%	-100° to +200°F [-75° to +95°C]
EA	Constantan foil in combination with a tough, flexible, polyimide backing.	±5%	-100° to +350°F [-75° to +175°C]
WA	Fully encapsulated constantan gages with high endurance leadwires.	±2%	-100° to +400°F [-75° to +205°C]
WK	Fully encapsulated K-alloy gages with high-endurance leadwires.	±1.5%	-452° to +550°F [-269° to +230°C]
EP	Annealed constantan foil with tough, high-elongation polyimide backing.	±20%	-100° to +400°F [-75° to +205°C]
SA	Fully encapsulated constantan gages with solder dots.	±2%	-100° to +400°F [-75° to +205°C]
SK	Fully encapsulated K-alloy gages with solder dots.	±1.5%	-452° to +450°F [-269° to +230°C]

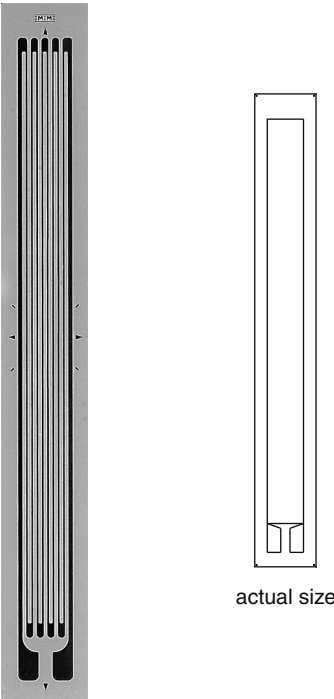
Note 1: Insert desired S-T-C number in spaces marked XX.

Note 2: Tolerance is increased when Option W, E, SE, LE, or P is specified.

Note 3: Products with designations and options shown in bold are not RoHS compliant.

*Options available but not normally recommended. See Optional Features data sheet for details.

General Purpose Strain Gages- Linear Pattern

GAGE PATTERN DATA					
			GAGE DESIGNATION	RESISTANCE (OHMS)	OPTIONS AVAILABLE
			See Note 1, 3	See Note 2	See Note 3
			N2A-XX-20CBW-120 N2A-XX-20CBW-350 EA-XX-20CBW-120 WA-XX-20CBW-120 WK-XX-20CBW-350 EP-XX-20CBW-120 SA-XX-20CBW-120 SK-XX-20CBW-350	120 ± 0.2% 350 ± 0.2% 120 ± 0.2% 350 ± 0.4% 120 ± 0.4% 350 ± 0.2% 120 ± 0.4% 350 ± 0.4%	W, E, L, LE, P W, E, L, LE, P W, E, L, LE, P W* W*
DESCRIPTION For use on concrete and for strain integration on large specimens.					
GAGE DIMENSIONS		Legend: ES = Each Section S = Section (S1 = Sec 1)		CP = Complete Pattern M = Matrix	
	inch				
	millimeter				
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
2.000	2.250	0.188	0.188	2.46	0.32
50.80	57.15	4.78	4.78	62.5	8.1

GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
N2A	Constantan foil gages with a thin, laminated, polyimide-film backing.	±3%	-100° to +200°F [-75° to +95°C]
EA	Constantan foil in combination with a tough, flexible, polyimide backing.	±5%	-100° to +350°F [-75° to +175°C]
WA	Fully encapsulated constantan gages with high-endurance leadwires.	±2%	-100° to +400°F [-75° to +205°C]
WK	Fully encapsulated K-alloy gages with high-endurance leadwires.	±1.5%	-452° to +550°F [-269° to +290°C]
EP	Annealed constantan foil with tough, high-elongation polyimide backing.	±20%	-100° to +400°F [-75° to +205°C]
SA	Fully encapsulated constantan gages with solder dots.	±2%	-100° to +400°F [-75° to +205°C]
SK	Fully encapsulated K-alloy gages with solder dots.	±1.5%	-452° to +450°F [-269° to +230°C]

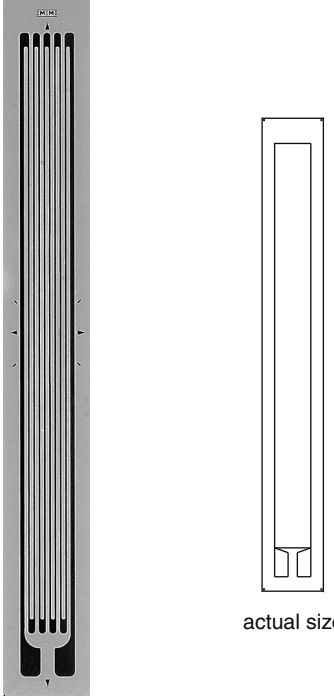

Note 1: Insert desired S-T-C number in spaces marked XX.


Note 2: Tolerance is increased when Option W, E, SE, LE, or P is specified.

Note 3: Products with designations and options shown in bold are not RoHS compliant.

*Options available but not normally recommended. See Optional Features data sheet for details.















General Purpose Strain Gages - Linear Pattern

GAGE PATTERN DATA					
			GAGE DESIGNATION See Note 1	RESISTANCE (OHMS)	OPTIONS AVAILABLE
			C2A-XX-20CLW-120 C2A-XX-20CLW-350	120 ± 0.6% 350 ± 0.6%	
DESCRIPTION For use on concrete and for strain integration on large specimens.					
GAGE DIMENSIONS			Legend: ES = Each Section S = Section (S1 = Sec 1)	CP = Complete Pattern M = Matrix	<input type="checkbox"/> inch <input type="checkbox"/> millimeter
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
2.000	2.155	0.175	0.175	2.232	0.235
50.80	54.740	4.450	4.450	56.692	5.969

GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
C2A	Encapsulated constantan gages with preattached ready-to-us cables.	±3%	-60° to +180°F [-50° to +80°C]
 Example of a C2A Construction			

Note 1: Insert desired S-T-C number in spaces marked XX.







General Purpose Strain Gages

GAGE PATTERN	GAGE SERIES See Note 1	GAGE RESISTANCE (ohms)	GAGE LENGTH	
			inches	millimeters
008CL   actual size	SA	120	0.008	0.2
	Micro-grid gage for strain measurement in high-gradient areas. Matrix size: 0.20L x 0.13W in. (5.1L x 3.3W mm)			
015CK   actual size	EA, WA, EP, SA	120	0.015	0.38
	Micro-miniature pattern with enlarged solder tabs. See also 015UW pattern. Matrix size: 0.19L x 0.15W in. (4.8L x 3.8W mm)			
015EH   actual size	EA, EP, SA, SK	120	0.015	0.38
	Micro-miniature pattern with tab at each side of grid. Matrix size: 0.15L x 0.19W in. (3.8L x 4.8W mm)			
015LA   actual size	EA, EP	120	0.015	0.38
	Primarily used in small radii where gage tabs must be at one end. Matrix size: 0.18L x 0.10W in. (4.6L x 2.5W mm)			
015LW   actual size	C2A	120	0.015	0.38
	Encapsulated constantan gages with preattached ready-to-use cables. Matrix size: 0.08L x 0.05W in. (1.9L x 1.4W mm)			
015SE   actual size	EA, EP, SA	120	0.015	0.38
	Micro-miniature pattern with tabs on one side for use near abutments. Matrix size: 0.16L x 0.14W in. (4.1L x 3.6W mm)			
030LB   actual size	EA, EP, SA	120	0.03	0.76
	Miniature gage pattern for small radii where gage tabs must be at one end. Matrix size: 0.24L x 0.15W in. (6.1L x 3.8W mm)			

Note 1: Products with designations and options shown in bold are not RoHS compliant.

See www.vishay.com/strain-gages for complete specifications.







General Purpose Strain Gages

GAGE PATTERN	GAGE SERIES See Note 1	GAGE RESISTANCE (ohms)	GAGE LENGTH	
			inches	millimeters
031MF  actual size	EA, SA	120	0.031	0.79
Miniature ten-element strip gage with electrically independent grids. All grids parallel to long axis of pattern. Grid centerline spacing 0.080 in (2.03 mm). Matrix size: 0.94L x 0.19W in. (23.9L x 4.8W mm)				
032SG  actual size	EA, WA , WK, EP, SA, SK	120	0.032	0.81
Miniature gage with side-tab geometry. Matrix size: 0.16L x 0.19W in. (4.1L x 4.8W mm)				
045AL  actual size	EA, SA	350	0.045	1.14
Miniature high-resistance gage. Matrix size: 0.22L x 0.14W in. (5.6L x 3.6W mm)				
050AH  actual size	EA, ED, EP, SA, SK, SD	120, 350	0.05	1.27
General-purpose miniature gage. Matrix size: 0.23L x 0.14W in. (5.8L x 3.6W mm)				
050AR  actual size	EA, ED, WA , WK, SA, SK, SD, WD	120, 350	0.05	1.27
General-purpose miniature gage with large solder tabs. Matrix size: 0.25L x 0.18W in. (6.4L x 4.6W mm)				
050SB  actual size	EA, ED, WA , WK, EP, SA, SK, SD, WD	120, 350	0.05	1.27
Similar to the 050AH pattern but with solder tabs at side of grid. Matrix size: 0.19L x 0.19W in. (4.8L x 4.8W mm)				

Note 1: Products with designations and options shown in bold are not RoHS compliant.

See www.vishay.com/strain-gages for complete specifications.













General Purpose Strain Gages

GAGE PATTERN	GAGE SERIES See Note 1	GAGE RESISTANCE (ohms)	GAGE LENGTH	
			inches	millimeters
060CD 	EA, ED, WA , WK , SA , SK , SD , WD	350, 1000	0.06	1.52
	Small high-resistance gage. See also 060CN pattern. Matrix size: 0.28L x 0.20W in. (7.1L x 5.1W mm)			
060CN 	EA, ED, WA , WK , EP, SA , SD , WD	120, 350	0.06	1.52
	Similar to 060CD pattern except for grid resistance. Matrix size: 0.26L x 0.18W in. (6.6L x 4.6W mm)			
060CP 	EA, ED, WA , WK , EP, SA , SK , SD , WD	120, 350	0.06	1.52
	Small high-resistance gage with high power-handling capability. Matrix size: 0.31L x 0.26W in. (7.9L x 6.6W mm)			
062DF 	EA, ED, WA , WK , EP, SA , SK , SD , WD	120, 350	0.062	1.57
	General-purpose gage with solder tab at each end of grid. See also 062DN pattern. Matrix size: 0.32L x 0.16W in. (8.1L x 4.1W mm)			
070LC 	EA	120, 350	0.07	1.78
	Very narrow gage for use in restricted areas. Matrix size: 0.24L x 0.09W in. (6.1L x 2.3W mm)			
090DG 	EA, ED, EP, SA , SK , SD	120, 350	0.09	2.29
	Intermediate-size grid with tab at each end. See also 090DH and 090EF patterns. Matrix size: 0.44L x 0.263W in. (11.2L x 6.6W mm)			

Note 1: Products with designations and options shown in bold are not RoHS compliant.

See www.vishay.com/strain-gages for complete specifications.







General Purpose Strain Gages

GAGE PATTERN	GAGE SERIES See Note 1	GAGE RESISTANCE (ohms)	GAGE LENGTH	
			inches	millimeters
090DH   actual size	EA, ED, EP, SA, SK, SD	350, 1000	0.09	2.29
090EF   actual size	EA, ED, EP, SA, SK, SD	120, 350	0.09	2.29
090EG   actual size	EA, ED, EP, SA, SK, SD	350, 1000	0.09	2.29
125BS   actual size	ED, WK, SK, SD, WD	120	0.125	3.18
125EP   actual size	EA, ED, EP, SA, SK, SD	350, 1000	0.125	3.18
125EQ   actual size	EA, ED, EP, SA, SK, SD	120, 350	0.125	3.18

Note 1: Products with designations and options shown in bold are not RoHS compliant.

See www.vishay.com/strain-gages for complete specifications.







General Purpose Strain Gages

GAGE PATTERN	GAGE SERIES See Note 1	GAGE RESISTANCE (ohms)	GAGE LENGTH	
			inches	millimeters
125MG 	EA, WA , WK, SA , SK	120, 350	0.125	3.18
Dual-pattern gage for use in back-to-back bending applications. Longitudinal grid centerlines spaced 0.250 in (6.35 mm) apart. Matrix size: 0.32L x 0.47W in. (8.1L x 11.9W mm)				
125UE 	CEA	120, 350	0.125	3.18
General-purpose gage with large tab at each end of grid. Exposed solder tab area 0.08 x 0.07 in (2.0 x 1.8 mm). Matrix size: 0.57L x 0.20W in. (14.5L x 5.1W mm)				
230DS 	EA, ED, WA , WK, EP, SA , SK , SD , WD	120, 350	0.23	5.84
General-purpose gage with very narrow geometry. Matrix size: 0.50L x 0.12W in. (12.7L x 3.0W mm)				
250AF 	EA, ED, WA , WK, EP, SA , SK , SD , WD	120, 350	0.25	6.35
General-purpose gage with high-dissipation grid. Matrix size: 0.57L x 0.36W in. (14.5L x 9.1W mm)				
250BB 	EA, ED, EP	120, 350	0.25	6.35
General-purpose gage with large solder tabs. Matrix size: 0.64L x 0.21W in. (16.3L x 6.9W mm)				
250BK 	EA, WA , WK, SA , SK	1000, 3000	0.25	6.35
High-resistance gage with good power dissipation capability for high output applications or use on plastics. Matrix size: 0.58L x 0.27W in. (14.7L x 6.9W mm)				

Note 1: Products with designations and options shown in bold are not RoHS compliant.

See www.vishay.com/strain-gages for complete specifications.




General Purpose Strain Gages

GAGE PATTERN	GAGE SERIES See Note 1	GAGE RESISTANCE (ohms)	GAGE LENGTH	
			inches	millimeters
250BM  <p>actual size</p>	EA, ED, WA , WK, EP, SA, SK, SD , WD	500, 1500	0.25	6.35
	General-purpose gage with high-resistance grid. Matrix size: 0.58L x 0.27W in. (14.7L x 6.9W mm)			
250BP  <p>actual size</p>	SK , WK, ED, SD , WD	120	0.25	3.18
	A general-purpose gage used primarily to obtain 120-ohm grid resistance in SK and WK Series. Matrix size: 0.53L x 0.22W in. (13.5L x 5.6W mm)			
250MQ  <p>actual size</p>	EA, ED, EK, WA , WK, SA, SK, SD , WD	350, 1000	0.25	6.35
	Dual pattern for back-to-back bending applications. Longitudinal grid centerlines are spaced 0.185 in (4.70 mm) apart. EK-Series gages are supplied with duplex copper pads (DP) when optional feature W or SE is not specified. Matrix size: 0.47L x 0.40W in. (11.9L x 10.2W mm)			
350DD  <p>actual size</p>	EA, ED, WA , WK, EP, SA, SK, SD , WD	350, 1000	0.35	8.89
	General-purpose gage with narrow pattern geometry and tab at each end of grid. Matrix size: 0.61L x 0.18W in. (15.5L x 4.6W mm)			
375BG  <p>actual size</p>	EA, ED, WA , WK, EP, SA, SK, SD , WD	120, 350	0.375	9.53
	General-purpose gage. Matrix size: 0.71L x 0.29W in. (18.0L x 7.4W mm)			
500BL  <p>actual size</p>	EA, ED, WA , WK, EP, SA, SK, SD , WD	350, 1000	0.5	12.7
	Widely used general-purpose gage with compact geometry. Matrix size: 0.87L x 0.27W in. (22.1L x 6.9W mm)			

Note 1: Products with designations and options shown in bold are not RoHS compliant.

See www.vishay.com/strain-gages for complete specifications.

General Purpose Strain Gages

GAGE PATTERN	GAGE SERIES See Note 1	GAGE RESISTANCE (ohms)	GAGE LENGTH	
			inches	millimeters
500GB  actual size	EA, ED, WA , WK, EP, SA, SK, SD , WD	120, 350	0.5	12.7
	General-purpose gage with very narrow geometry. See also 500GC pattern. Matrix size: 0.75L x 0.15W in. (19.1L x 3.8W mm)			
500GC  actual size	EA, ED, WA , WK, EP, SA, SK, SD , WD	350, 1000	0.5	12.7
	General-purpose gage with very narrow geometry. Matrix size: 0.78L x 0.15W in. (19.8L x 3.8W mm)			
40CBY  30% of actual size	N2A, EA, WA , WK, EP, SA, SK	120, 350	4	101.6
	For use on concrete and for strain integration on large specimens. Matrix size: 4.49L x 0.33W in. (114.0L x 8.4W mm)			

Note 1: Products with designations and options shown in bold are not RoHS compliant.

See www.vishay.com/strain-gages for complete specifications.



Tee Rosettes (General Use)

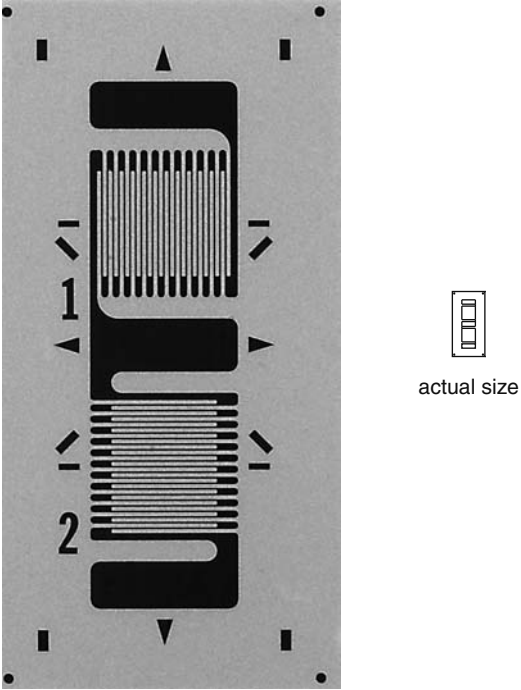
FEATURES

- Gage patterns designed for measuring orthogonal strains
- All patterns have two grids oriented at 0° and 90° angles
- Both stacked and planar constructions available
- Gage lengths from 0.050" (1.27mm) to 0.250" (6.35mm)

Patterns

050TG	62
062LT	63
062TJ	64
062TT	65
062TZ	66
062UT	67
062WT	68
120WT	69
125LT	70
125TG	71
125TM	72
125UT	73
125WT	74
250UT	75
Other Tee Rosettes	76

General Purpose Strain Gages - Tee Rosette

GAGE PATTERN DATA						
			<p>GAGE DESIGNATION</p> <p>See Note 1, 3</p>	<p>RESISTANCE (OHMS)</p> <p>See Note 2</p>	<p>OPTIONS AVAILABLE</p> <p>See Note 3</p>	
			<p>EA-XX-050TG-350 WA-XX-050TG-350 EP-08-050TG-350 SA-XX-050TG-350</p>	<p>350 ± 0.2% 350 ± 0.4% 350 ± 0.2% 350 ± 0.4%</p>	<p>L, LE</p>	
<p>DESCRIPTION</p> <p>Miniature high-resistance 90° tee rosette. Sections have a common solder tab.</p>						
GAGE DIMENSIONS						
			Legend: ES = Each Section S = Section (S1 = Sec 1)	CP = Complete Pattern M = Matrix	<input type="checkbox"/> inch <input checked="" type="checkbox"/> millimeter	
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width	
0.050 ES	0.250 CP	0.070 ES	0.070 CP	0.34	0.17	
1.27 ES	6.35 CP	1.78 ES	1.78 CP	8.6	4.3	

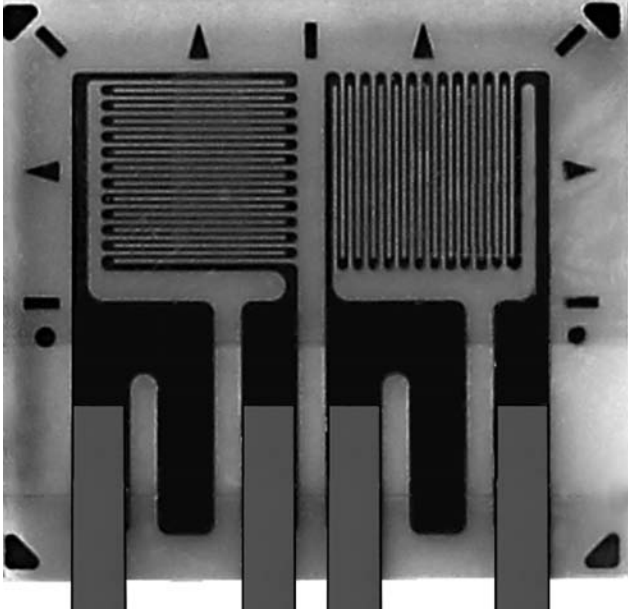


GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
EA	Constantan foil in combination with a tough, flexible, polyimide backing.	±3%	-100° to +350°F [-75° to +175°C]
WA	Fully encapsulated constantan gages with high-endurance leadwires.	±2%	-100° to +400°F [-75° to +205°C]
EP	Annealed constantan foil with tough, high-elongation polyimide backing.	±10%	-100° to +400°F [-75° to +205°C]
SA	Fully encapsulated constantan gages with solder dots.	±2%	-100° to +400°F [-75° to +205°C]

Note 1: Insert desired S-T-C number in spaces marked XX.



Note 2: Tolerance is increased when Option W, E, SE, LE, or P is specified.

Note 3: Products with designations and options shown in bold are not RoHS compliant.

General Purpose Strain Gages - Tee Rosette

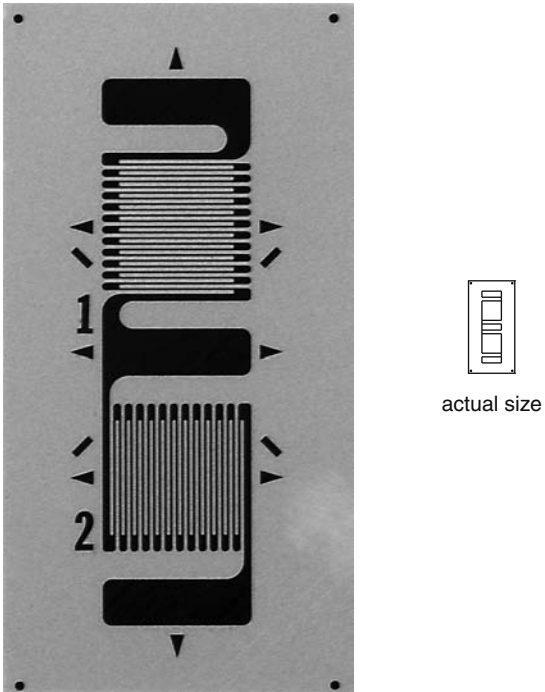
GAGE PATTERN DATA			
 <p style="text-align: center;">  actual size </p>	<p>GAGE DESIGNATION</p> <p>See Note 1</p>	<p>RESISTANCE (OHMS)</p>	<p>OPTIONS AVAILABLE</p>
	<p>L2A-XX-062LT-120 L2A-XX-062LT-350 C2A-XX-062LT-120 C2A-XX-062LT-350</p>	<p>120 ± 0.6% 350 ± 0.6% 120 ± 0.6% 350 ± 0.6%</p>	
<p>DESCRIPTION</p> <p>General-purpose 90° rosette.</p>		<p style="text-align: center;">  RoHS COMPLIANT </p>	

GAGE DIMENSIONS					
Legend:			ES = Each Section	CP = Complete Pattern	<div style="border: 1px solid black; padding: 2px; display: inline-block;">inch</div> <div style="border: 1px solid black; padding: 2px; display: inline-block;">millimeter</div>
			S = Section (S1 = Sec 1)	M = Matrix	
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.062	0.164	0.070	0.170	0.210	0.290
1.52	4.17	1.78	4.32	5.33	7.37

GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
L2A	Encapsulated constantan gages with preattached ribbon leads.	±3%	-100° to +250°F [-75° to +120°C]
C2A	Encapsulated constantan gages with preattached ready-to-use cables.	±3%	-60° to +180°F [-50° to +80°C]
 Example of an L2A Construction		 Example of a C2A Construction	

Note 1: Insert desired S-T-C number in spaces marked XX.

General Purpose Strain Gages - Tee Rosette

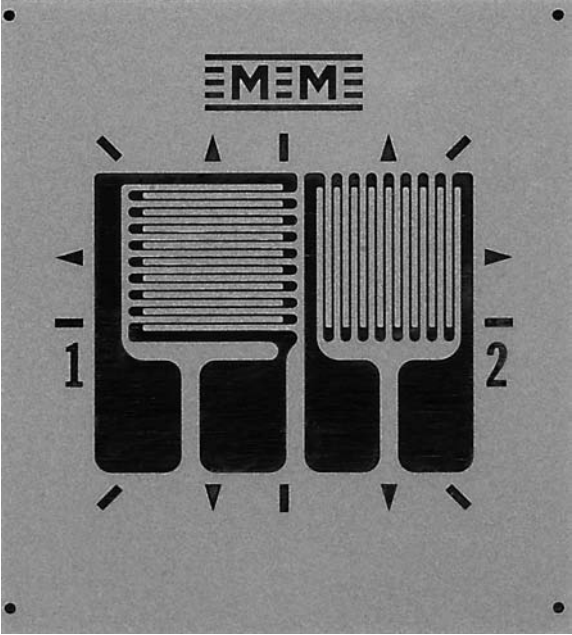
GAGE PATTERN DATA					
			GAGE DESIGNATION See Note 1, 2	RESISTANCE (OHMS)	OPTIONS AVAILABLE See Note 2
			EA-XX-062TJ-120 EA-XX-062TJ-350 SA-XX-062TJ-120 SA-XX-062TJ-350	120 ± 0.2% 350 ± 0.2% 120 ± 0.4% 350 ± 0.4%	
DESCRIPTION General-purpose 90° tee rosette. Sections have a common solder tab.					
GAGE DIMENSIONS			Legend: ES = Each Section S = Section (S1 = Sec 1)	CP = Complete Pattern M = Matrix	<input type="checkbox"/> inch <input checked="" type="checkbox"/> millimeter
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.062 ES	0.295 CP	0.080 ES	0.080 CP	0.38	0.19
1.57 ES	7.49 CP	2.03 ES	2.03 CP	12.2	4.8

GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
EA	Constantan foil in combination with a tough, flexible, polyimide backing.	±3%	-100° to +350°F [-75° to +175°C]
SA	Fully encapsulated constantan gages with solder dots.	±2%	-100° to +400°F [-75° to +205°C]

Note 1: Insert desired S-T-C number in spaces marked XX.

Note 2: Products with designations and options shown in bold are not RoHS compliant.

General Purpose Strain Gages - Tee Rosette

GAGE PATTERN DATA					
			GAGE DESIGNATION See Note 1, 3	RESISTANCE (OHMS) See Note 2	OPTIONS AVAILABLE See Note 3
			EA-XX-062TT-120 EA-XX-062TT-350 EK-XX-062TT-350 WA-XX-062TT-120 WA-XX-062TT-350 WK-XX-062TT-350 EP-XX-062TT-120 EP-XX-062TT-350 SA-XX-062TT-120 SA-XX-062TT-350 SK-XX-062TT-350	120 ± 0.2% 350 ± 0.2% 350 ± 0.2% 120 ± 0.4% 350 ± 0.4% 350 ± 0.4% 120 ± 0.2% 350 ± 0.2% 120 ± 0.4% 350 ± 0.4% 350 ± 0.4%	W, E, L, LE W, E, L, LE W, SE W* W* W*
DESCRIPTION General-purpose 90° tee rosette. Sections are electrically independent. EK-Series gages are supplied with duplex copper pads (DP) when optional feature W or SE is not specified.					
GAGE DIMENSIONS			Legend: ES = Each Section S = Section (S1 = Sec 1)	CP = Complete Pattern M = Matrix	<input type="checkbox"/> inch <input type="checkbox"/> millimeter
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.062 ES	0.133 CP	0.075 ES	0.168 CP	0.28	0.26
1.57 ES	3.38 CP	1.91 ES	4.27 CP	7.1	6.6

GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
EA	Constantan foil in combination with a tough, flexible, polyimide backing.	±3%	-100° to +350°F [-75° to +175°C]
EK	K-alloy foil in combination with a tough, flexible polyimide backing.	±1.5%	-320° to +350°F [-195° to +175°C]
WA	Fully encapsulated constantan gages with high-endurance leadwires.	±2%	-100° to +400°F [-75° to +205°C]
WK	Fully encapsulated K-alloy gages with high-endurance leadwires.	±1.5%	-452° to +550°F [-269° to +290°C]
EP	Annealed constantan foil with tough, high-elongation polyimide backing.	±10%	-100° to +400°F [-75° to +205°C]
SA	Fully encapsulated constantan gages with solder dots.	±2%	-100° to +400°F [-75° to +205°C]
SK	Fully encapsulated K-alloy gages with solder dots.	±1.5%	-452° to +450°F [-269° to +230°C]

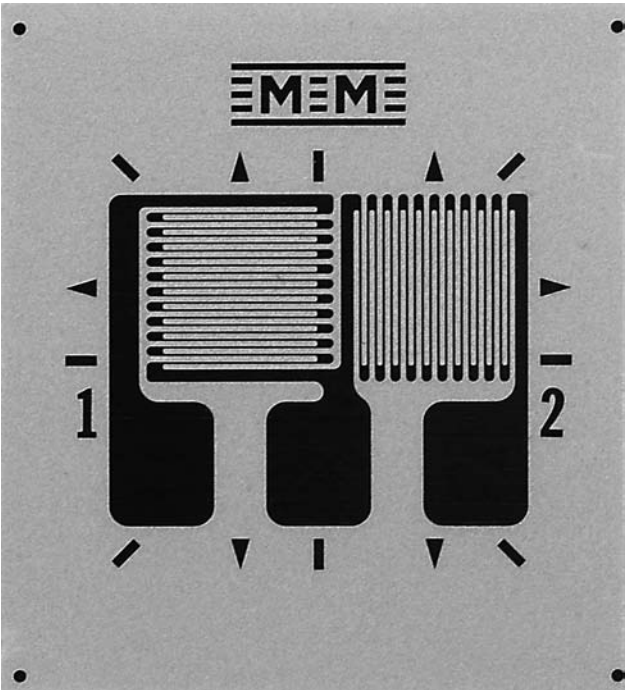
Note 1: Insert desired S-T-C number in spaces marked XX.

Note 2: Tolerance is increased when Option W, E, SE, LE, or P is specified.

Note 3: Products with designations and options shown in bold are not RoHS compliant.

*Options available but not normally recommended. See Optional Features data sheet for details.

General Purpose Strain Gages - Tee Rosette

GAGE PATTERN DATA					
			GAGE DESIGNATION See Note 1, 3	RESISTANCE (OHMS) See Note 2	OPTIONS AVAILABLE See Note 3
			EA-XX-062TZ-350 WA-XX-062TZ-350 WK-XX-062TZ-120 SA-XX-062TZ-350 SK-XX-062TZ-120	350 ± 0.2% 350 ± 0.4% 120 ± 0.4% 350 ± 0.4% 120 ± 0.4%	W, E, L, LE
DESCRIPTION General-purpose 90° tee rosette. Similar in geometry to 062TT pattern except common tab version.					
GAGE DIMENSIONS		Legend: ES = Each Section S = Section (S1 = Sec 1)		CP = Complete Pattern M = Matrix	
				<input type="checkbox"/> inch <input checked="" type="checkbox"/> millimeter	
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.062 ES	0.133 CP	0.075 ES	0.168 CP	0.28	0.26
1.57 ES	3.38 CP	1.91 ES	4.27 CP	7.1	6.6

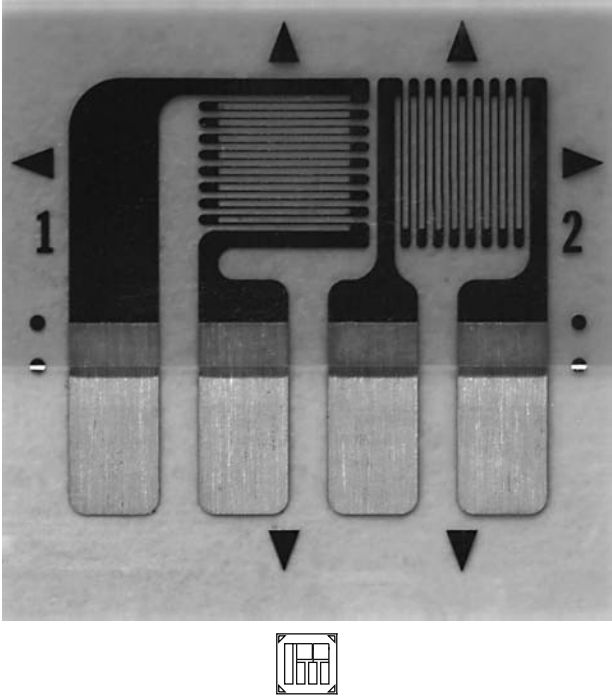
GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
EA	Constantan foil in combination with a tough, flexible, polyimide backing.	±3%	-100° to +350°F [-75° to +175°C]
WA	Fully encapsulated constantan gages with high-endurance leadwires.	±2%	-100° to +400°F [-75° to +205°C]
WK	Fully encapsulated K-alloy gages with high-endurance leadwires.	±1.5%	-452° to +550°F [-269° to +290°C]
SA	Fully encapsulated constantan gages with solder dots.	±2%	-100° to +400°F [-75° to +205°C]
SK	Fully encapsulated K-alloy gages with solder dots.	±1.5%	-452° to +450°F [-269° to +230°C]

Note 1: Insert desired S-T-C number in spaces marked XX.

Note 2: Tolerance is increased when Option W, E, SE, LE, or P is specified.

Note 3: Products with designations and options shown in bold are not RoHS compliant.

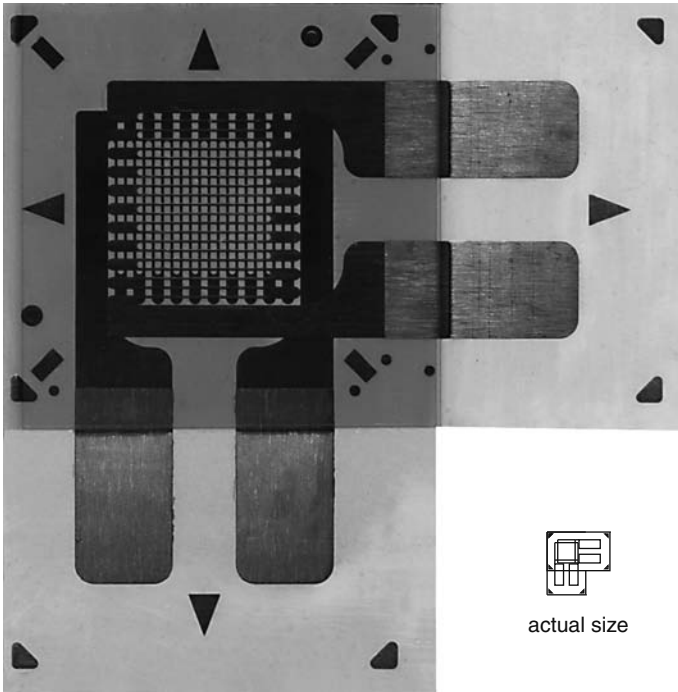


General Purpose Strain Gages - Tee Rosette

GAGE PATTERN DATA					
 <p style="text-align: center;">actual size</p>			GAGE DESIGNATION See Note 1	RESISTANCE (OHMS) 	OPTIONS AVAILABLE See Note 2
			CEA-XX-062UT-120 CEA-XX-062UT-350	120 ± 0.4% 350 ± 0.4%	P2 P2
DESCRIPTION Small general-purpose two-element 90° tee rosette. Exposed solder tab area 0.07 x 0.04 in [1.8 x 1.0 mm].					
GAGE DIMENSIONS		Legend: ES = Each Section S = Section (S1 = Sec 1)		CP = Complete Pattern M = Matrix	
	inch				
	millimeter				
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.062 ES	0.205 CP	0.080 ES	0.225 CP	0.31	0.31
1.57 ES	5.21 CP	2.03 ES	5.72 CP	7.9	7.9
GAGE SERIES DATA					
See Gage Series data sheet for complete specifications.					
Series	Description		Strain Range	Temperature Range	
CEA	Universal general-purpose strain gages.		±3%	-100° to +350°F [-75° to +175°C]	

Note 1: Insert desired S-T-C number in spaces marked XX.

Note 2: Products with designations and options shown in bold are not RoHS compliant.

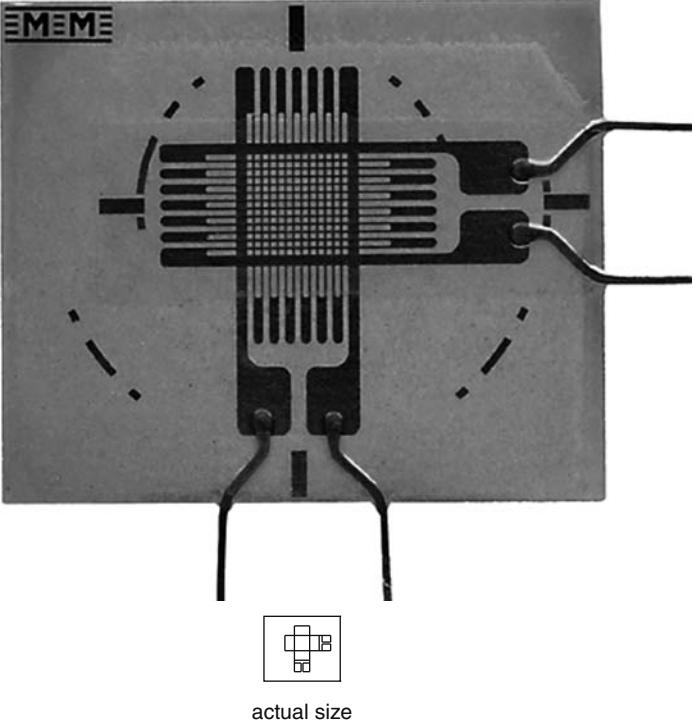
General Purpose Strain Gages - Tee Rosette

GAGE PATTERN DATA					
 <p style="text-align: center; margin-top: 10px;">  actual size </p>	GAGE DESIGNATION See Note 1	RESISTANCE (OHMS) 120 ± 0.5% 350 ± 0.5%	OPTIONS AVAILABLE		
	CEA-XX-062WT-120 CEA-XX-062WT-350	DESCRIPTION Small two-element 90° stacked rosette. Exposed solder tab area 0.07 x 0.04 in [1.8 x 1.0 mm]. Maximum operating temperature +150°F [+65°C].		 RoHS COMPLIANT	
	GAGE DIMENSIONS				
			Legend: ES = Each Section CP = Complete Pattern S = Section (S1 = Sec 1) M = Matrix		<input type="checkbox"/> inch <input checked="" type="checkbox"/> millimeter
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.062 ES	0.235 CP	0.120 ES	0.235 CP	0.33	0.33
1.57 ES	5.97 CP	3.05 ES	5.97 CP	8.3	8.3

GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
CEA	Universal general-purpose strain gages.	±3%	-100° to +150°F [-75° to +65°C]

Note 1: Insert desired S-T-C number in spaces marked XX.

General Purpose Strain Gages - Tee Rosette

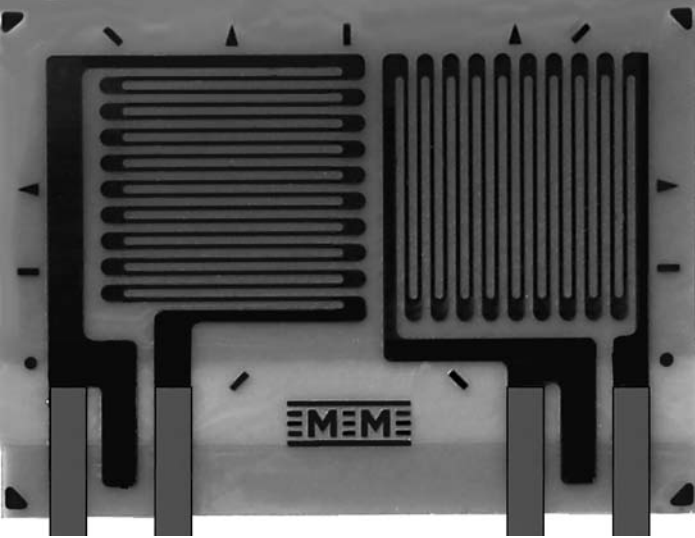


GAGE PATTERN DATA					
 <p>actual size</p>			<p>GAGE DESIGNATION</p> <p>See Note 1, 2</p>	<p>RESISTANCE (OHMS)</p>	<p>OPTIONS AVAILABLE</p> <p>See Note 2</p>
			<p>WA-XX-120WT-120 WA-XX-120WT-350 WD-DY-120WT-350 WK-XX-120WT-120 WK-XX-120WT-350 SA-XX-120WT-120 SA-XX-120WT-350 SK-XX-120WT-120 SK-XX-120WT-350 SD-DY-120WT-350</p>	<p>120 ± 0.5% 350 ± 0.5% 350 ± 0.5% 120 ± 0.5% 350 ± 0.5% 120 ± 0.5% 350 ± 0.5% 350 ± 0.5%</p>	
<p>DESCRIPTION</p> <p>Two-element 90° tee stacked rosette. See also 125WT pattern.</p>					
<p>GAGE DIMENSIONS</p>			<p>Legend: ES = Each Section S = Section (S1 = Sec 1)</p>	<p>CP = Complete Pattern M = Matrix</p>	<p>inch millimeter</p>
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.120 ES	0.34 M	0.080 ES	0.040 M	0.34	0.40
3.05 ES	8.6 M	2.03 ES	10.2 M	8.6	10.2

GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
WA	Fully encapsulated constantan gages with high-endurance leadwires.	±2%	-100° to +400°F [-75° to +205°C]
WD	Fully encapsulated isoelastic gages with high-endurance leadwires.	±1.5%	-320° to +500°F [-195° to +260°C]
WK	Fully encapsulated K-alloy gages with high-endurance leadwires.	±1.5%	-452° to +550°F [-269° to +290°C]
SA	Fully encapsulated constantan gages with solder dots.	±2%	-100° to +400°F [-75° to +205°C]
SK	Fully encapsulated K-alloy gages with solder dots.	±1.5%	-452° to +450°F [-269° to +230°C]
SD	Equivalent to WD Series, but with solder dots instead of leadwires.	±1.5%	-320° to +400°F [-195° to +205°C]


Note 1: Insert desired S-T-C number in spaces marked XX.

Note 2: Products with designations and options shown in bold are not RoHS compliant.


General Purpose Strain Gages - Tee Rosette

GAGE PATTERN DATA					
  actual size			GAGE DESIGNATION See Note 1	RESISTANCE (OHMS) See Note 1	OPTIONS AVAILABLE See Note 1
			L2A-XX-125LT-120 L2A-XX-125LT-350 C2A-XX-125LT-120 C2A-XX-125LT-350	120 ± 0.6% 350 ± 0.6% 120 ± 0.6% 350 ± 0.6%	
DESCRIPTION General-purpose 90° rosette.					
GAGE DIMENSIONS			Legend: ES = Each Section S = Section (S1 = Sec 1)	CP = Complete Pattern M = Matrix	<input type="checkbox"/> inch <input checked="" type="checkbox"/> millimeter
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.125 ES	0.243 CP	0.150 ES	0.340 CP	0.290	0.400
3.18 ES	6.17 CP	3.81 ES	8.64 CP	7.37	10.16

GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
L2A	Encapsulated constantan gages with preattached ribbon leads.	±3%	-100° to +250°F [-75° to +120°C]
C2A	Encapsulated constantan gages with preattached ready-to-use cables.	±3%	-60° to +180°F [-50° to +80°C]



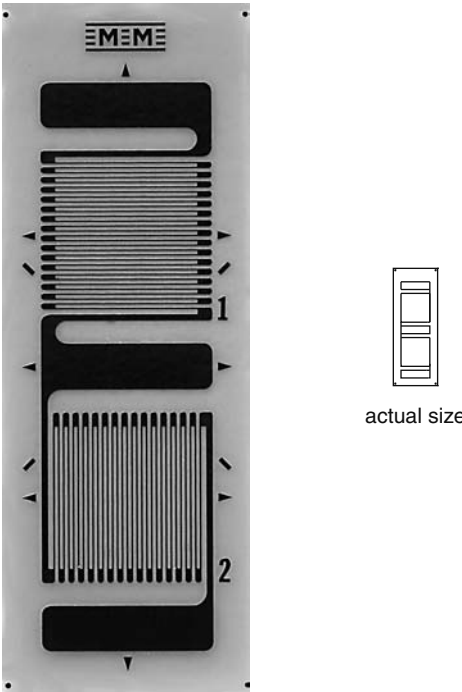
Example of an L2A Construction



Example of a C2A Construction

Note 1: Insert desired S-T-C number in spaces marked XX.

General Purpose Strain Gages - Tee Rosette

GAGE PATTERN DATA					
			GAGE DESIGNATION See Note 1, 3	RESISTANCE (OHMS) See Note 2	OPTIONS AVAILABLE See Note 3
			EA-XX-125TG-350 EK-XX-125TG-10C WA-XX-125TG-350 SA-XX-125TG-350 SK-XX-125TG-10C	350 ± 0.2% 1000 ± 0.2% 350 ± 0.4% 350 ± 0.4% 1000 ± 0.4%	L, LE SE
DESCRIPTION General-purpose two-element 90° tee rosette with high-resistance grid. Sections have a common electrical connection. EK-Series gages are supplied with duplex copper dots (DD) when optional feature SE is not specified.					
GAGE DIMENSIONS			Legend: ES = Each Section S = Section (S1 = Sec 1)	CP = Complete Pattern M = Matrix	<input type="checkbox"/> inch <input checked="" type="checkbox"/> millimeter
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.125 ES	0.500 CP	0.150 ES	0.150 CP	0.59	0.21
3.18 ES	12.70 CP	3.81 ES	3.81 CP	15.0	5.3

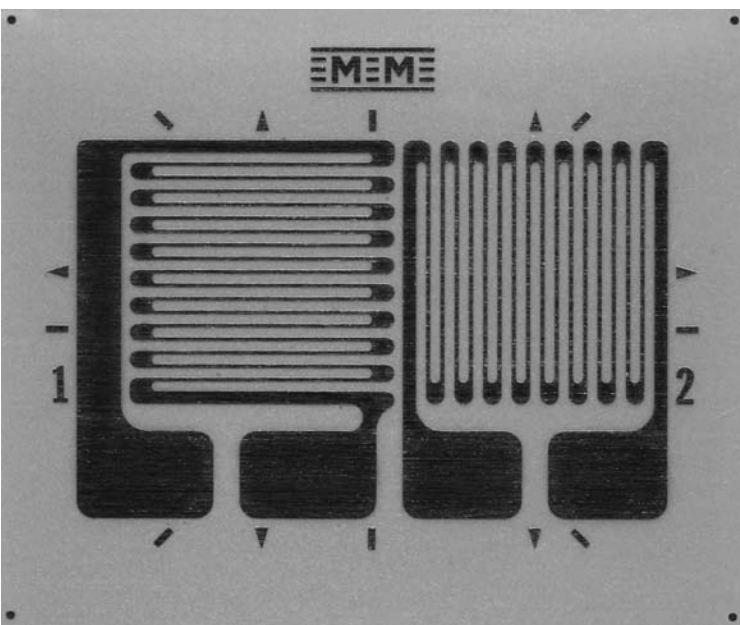

GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
EA	Constantan foil in combination with a tough, flexible, polyimide backing.	±5%	-100° to +350°F [-75° to +175°C]
EK	K-alloy foil in combination with a tough, flexible polyimide backing.	±1.5%	-320° to +350°F [-195° to +175°C]
WA	Fully encapsulated constantan gages with high-endurance leadwires.	±2%	-100° to +400°F [-75° to +205°C]
SA	Fully encapsulated constantan gages with solder dots.	±2%	-100° to +400°F [-75° to +205°C]
SK	Fully encapsulated K-alloy gages with solder dots.	±1.5%	-452° to +450°F [-269° to +230°C]

Note 1: Insert desired S-T-C number in spaces marked XX.

Note 2: Tolerance is increased when Option W, E, SE, LE, or P is specified.

Note 3: Products with designations and options shown in bold are not RoHS compliant.

General Purpose Strain Gages - Tee Rosette

GAGE PATTERN DATA							
			GAGE DESIGNATION See Note 1, 3	RESISTANCE (OHMS) See Note 2	OPTIONS AVAILABLE See Note 3		
 actual size			EA-XX-125TM-120 WA-XX-125TM-120 WK-XX-125TM-350 EP-08-125TM-120 SA-XX-125TM-120 SK-XX-125TM-350	120 ± 0.2% 120 ± 0.4% 350 ± 0.4% 120 ± 0.2% 120 ± 0.4% 350 ± 0.4%	W, E, L, LE W* W*		
DESCRIPTION General-purpose two-element 90° tee rosette. Sections are electrically independent. See also 125TQ and 125UT patterns.							
GAGE DIMENSIONS							
			Legend: ES = Each Section S = Section (S1 = Sec 1)	CP = Complete Pattern M = Matrix			
<table border="1" style="display: inline-table; border-collapse: collapse;"> <tr><td style="padding: 2px;">inch</td></tr> <tr><td style="padding: 2px;">millimeter</td></tr> </table>						inch	millimeter
inch							
millimeter							
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width		
0.125 ES	0.215 CP	0.150 ES	0.335 CP	0.36	0.43		
3.18 ES	5.46 CP	3.81 ES	8.51 CP	9.1	10.9		

GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
EA	Constantan foil in combination with a tough, flexible, polyimide backing.	±5%	-100° to +350°F (-75° to +175°C)
WA	Fully encapsulated constantan gages with high-endurance leadwires.	±2%	-100° to +400°F (-75° to +205°C)
WK	Fully encapsulated K-alloy gages with high-endurance leadwires.	±1.5%	-452° to +550°F (-269° to +290°C)
EP	Annealed constantan foil with tough, high-elongation polyimide backing.	±20%	-100° to +400°F (-75° to +205°C)
SA	Fully encapsulated constantan gages with solder dots.	±2%	-100° to +400°F (-75° to +205°C)
SK	Fully encapsulated K-alloy gages with solder dots.	±1.5%	-452° to +450°F (-269° to +230°C)

Note 1: Insert desired S-T-C number in spaces marked XX.

Note 2: Tolerance is increased when Option W, E, SE, LE, or P is specified.

Note 3: Products with designations and options shown in bold are not RoHS compliant.

*Options available but not normally recommended. See Optional Features data sheet for details.

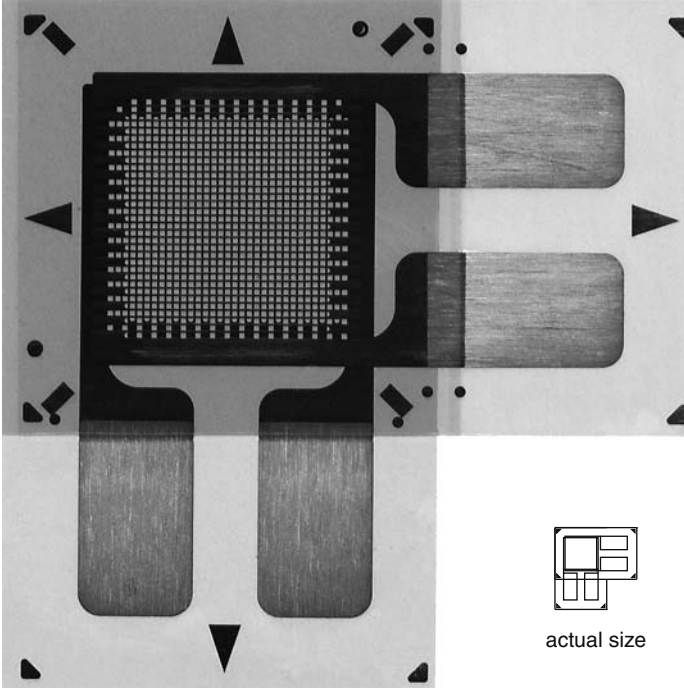

General Purpose Strain Gages - Tee Rosette

GAGE PATTERN DATA					
<p style="text-align: center;">actual size</p>			GAGE DESIGNATION See Note 1	RESISTANCE (OHMS) 	OPTIONS AVAILABLE See Note 2
			CEA-XX-125UT-120 CEA-XX-125UT-350	120 ± 0.4% 350 ± 0.4%	P2 P2
DESCRIPTION Two-element 90° tee rosette for general-purpose use. Exposed solder tab area 0.10 x 0.07 in [2.5 x 1.8 mm].					
GAGE DIMENSIONS		Legend: ES = Each Section S = Section (S1 = Sec 1)		CP = Complete Pattern M = Matrix	
				<input type="checkbox"/> inch <input checked="" type="checkbox"/> millimeter	
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.125 ES	0.325 CP	0.165 ES	0.365 CP	0.42	0.45
3.18 ES	8.26 CP	4.19 ES	9.27 CP	10.7	11.4
GAGE SERIES DATA					
See Gage Series data sheet for complete specifications.					
Series	Description	Strain Range	Temperature Range		
CEA	Universal general-purpose strain gages.	±5%	-100° to +350°F [-75° to +175°C]		

Note 1: Insert desired S-T-C number in spaces marked XX.

Note 2: Products with designations and options shown in bold are not RoHS compliant.

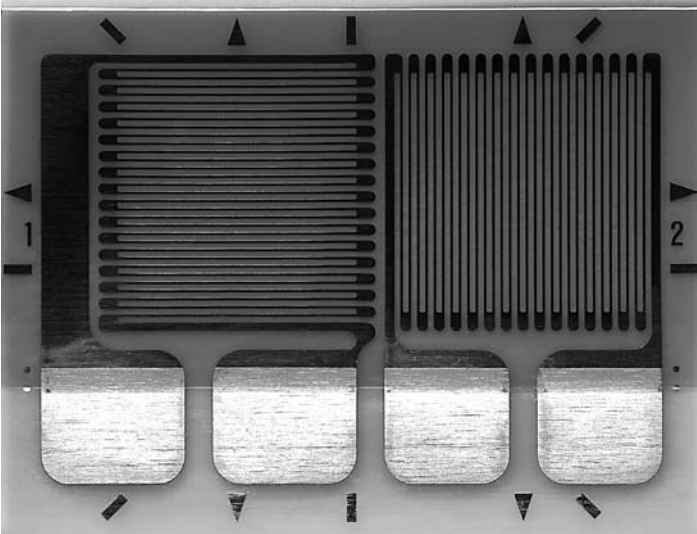

General Purpose Strain Gages - Tee Rosette

GAGE PATTERN DATA					
			GAGE DESIGNATION See Note 1	RESISTANCE (OHMS) CEA-XX-125WT-120: 120 ± 0.5% CEA-XX-125WT-350: 350 ± 0.5%	OPTIONS AVAILABLE
			DESCRIPTION Two-element 90° tee stacked rosette. Exposed solder tab area 0.10 x 0.07 in [2.5 x 1.8 mm]. Maximum operating temperature +150°F [+65°C].		
GAGE DIMENSIONS			Legend: ES = Each Section S = Section (S1 = Sec 1)	CP = Complete Pattern M = Matrix	inch millimeter
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.125 ES	0.325 CP	0.180 ES	0.325 CP	0.42	0.42
3.18 ES	8.2 CP	4.57 ES	8.26 CP	10.7	10.7

GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
CEA	Universal general-purpose strain gages.	±3%	-100° to +150°F [-75° to +65°C]

Note 1: Insert desired S-T-C number in spaces marked XX.













General Purpose Strain Gage - Tee Rosette

GAGE PATTERN DATA					
  actual size			GAGE DESIGNATION See Note 1	RESISTANCE (OHMS) See Note 2	OPTIONS AVAILABLE See Note 2
			CEA-XX-250UT-120 CEA-XX-250UT-350 CEA-XX-250UT-10C	120 ± 0.4% 350 ± 0.4% 1000 ± 0.4%	P2 P2 P2
DESCRIPTION Two-element 90° tee rosette for general-purpose use. Exposed solder tab area 0.13 x 0.10 in [3.3 x 2.5 mm].					
GAGE DIMENSIONS		Legend: ES = Each Section S = Section (S1 = Sec 1)		CP = Complete Pattern M = Matrix	
				<input type="checkbox"/> inch <input checked="" type="checkbox"/> millimeter	
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.250 ES	0.450 CP	0.290 ES	0.650 CP	0.55	0.74
6.35 ES	11.43 CP	7.37 ES	16.51 CP	14.0	18.8
GAGE SERIES DATA					
See Gage Series data sheet for complete specifications.					
Series	Description	Strain Range	Temperature Range		
CEA	Universal general-purpose strain gages.	±5%	-100° to +350°F [-75° to +175°C]		

Note 1: Insert desired S-T-C number in spaces marked XX.

Note 2: Products with designations and options shown in bold are not RoHS compliant.













General Purpose Strain Gages

GAGE PATTERN	GAGE SERIES See Note 1	GAGE RESISTANCE (ohms)	GAGE LENGTH	
			inches	millimeters
030TU   actual size	EA, EP, SA, SK	120, 350	0.03	0.76
	Miniature 90° tee rosette. Sections are electrically independent. Matrix size: 0.25L x 0.25W in. (6.4L x 6.4W mm)			
030TY   actual size	EA, EP, SA, SK	120, 350	0.03	0.76
	Miniature 90° tee rosette with large solder tabs. Matrix size: 0.30L x 0.15W in. (7.6L x 3.8W mm)			
030WT   actual size	WA, WK, SA, SK	120	0.03	0.76
	Miniature two-element 90° tee stacked rosette. See also 032WT pattern. Matrix size: 0.17L x 0.19W in. (4.3L x 4.8W mm)			
032WT   actual size	CEA	120	0.032	0.81
	Miniature two-element 90° stacked rosette. Exposed solder tab area is 0.07 x 0.04 in (1.8 x 1.0 mm). Maximum operating temperature +150°F (+65°C). Matrix size: 0.30L x 0.30W in. (7.6L x 7.6W mm)			
044TP   actual size	EA, SA	350	0.044	1.12
	Miniature high-resistance 90° tee rosette. Matrix size: 0.14L x 0.20W in. (3.6L x 5.1W mm)			
050TG   actual size	EA, WA, EP, SA	350	0.05	1.27
	Miniature high-resistance 90° tee rosette. Sections have a common solder tab. Matrix size: 0.34L x 0.17W in. (8.6L x 4.3W mm)			

Note 1: Products with designations and options shown in bold are not RoHS compliant.





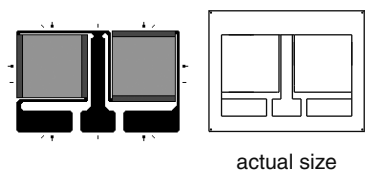
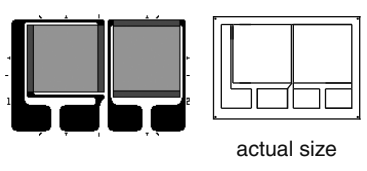
See www.vishay.com/strain-gages for complete specifications.

General Purpose Strain Gages

GAGE PATTERN	GAGE SERIES See Note 1	GAGE RESISTANCE (ohms)	GAGE LENGTH	
			inches	millimeters
060WT   actual size	WA, WK, SA, SK	120, 350, 1000	0.06	1.52
	Small two-element 90° tee stacked rosette. Matrix size: 0.24L x 0.30W in. (6.1L x 7.6W mm)			
062TZ   actual size	EA, WA, WK, SA, SK	120, 350	0.062	1.57
	General-purpose 90° tee rosette. Matrix size: 0.28L x 0.26W in. (7.1L x 6.6W mm)			
100TG   actual size	EA, WA, SA	350, 1000	0.1	2.54
	Small high-resistance 90° tee rosette for general-purpose use. Matrix size: 0.50L x 0.19W in. (12.7L x 4.8W mm)			
120WT   actual size	WA, WD, WK, SA, SK, SD	120, 350	0.12	3.05
	Two-element 90° tee stacked rosette. Matrix size: 0.34L x 0.40W in. (8.6L x 10.2W mm)			
125TA   actual size	EA, WA, WK, SA, SK	120, 350	0.125	3.18
	General-purpose two-element 90° tee rosette. Sections have a common electrical connection. See also 125TB pattern. Matrix size: 0.36L x 0.41W in. (9.1L x 10.4W mm)			
125TB   actual size	EA, EK, WA, WK, SA, SK	350, 1000	0.125	3.18
	General-purpose two-element 90° tee rosette. Same geometry as 125TA but with higher resistance. Sections have common electrical connection. EK-Series gages are supplied with duplex copper dots (DD) when optional feature W or SE is not specified. Matrix size: 0.36L x 0.44W in. (9.1L x 11.2W mm)			

Note 1: Products with designations and options shown in bold are not RoHS compliant. See www.vishay.com/strain-gages for complete specifications.



General Purpose Strain Gages

GAGE PATTERN	GAGE SERIES See Note 1	GAGE RESISTANCE (ohms)	GAGE LENGTH	
			inches	millimeters
125TF  <p>actual size</p>	EA, SA, SK	120, 350	0.125	3.18
<p>General-purpose two-element 90° tee rosette with narrow pattern geometry. Sections have a common electrical connection.</p> <p>Matrix size: 0.59L x 0.21W in. (15.0L x 5.3W mm)</p>				
125TQ  <p>actual size</p>	EA, EK, WA, WK, EP, SA, SK	350, 1000	0.125	3.18
<p>General-purpose two-element 90° tee rosette. EK-Series gages are supplied with duplex copper dots (DD) when optional feature W or SE is not specified.</p> <p>Matrix size: 0.42L x 0.47W in. (10.7L x 11.9W mm)</p>				
125VA  <p>actual size</p>	EA, EP, SA, SK	350, 1000	0.125	3.18
<p>General-purpose two-element 90° tee rosette with high-resistance grid. See also 125VB pattern.</p> <p>Matrix size: 0.64L x 0.23W in. (16.3L x 5.8W mm)</p>				
125VB  <p>actual size</p>	EA, EP, SA, SK	120, 350	0.125	3.18
<p>General-purpose two-element 90° tee rosette. Similar to 125TF pattern except sections are electrically independent. See also 125VA pattern.</p> <p>Matrix size: 0.64L x 0.23W in. (16.3L x 5.8W mm)</p>				
250TB  <p>actual size</p>	EA, EK, WA, WK, SA, SK	350, 1000	0.25	6.35
<p>General-purpose two-element 90° tee rosette. EK-Series gages are supplied with duplex copper pads (DP) when optional feature W or SE is not specified.</p> <p>Matrix size: 0.63L x 0.81W in. (16.0L x 20.6W mm)</p>				
250TM  <p>actual size</p>	EA, WA, WK, EP, SA, SK	120, 350	0.25	6.35
<p>General-purpose two-element 90° tee rosette. Sections are electrically independent.</p> <p>Matrix size: 0.53L x 0.75W in. (13.5L x 19.1W mm)</p>				

Note 1: Products with designations and options shown in bold are not RoHS compliant.

See www.vishay.com/strain-gages for complete specifications.

General Purpose Strain Gages

GAGE PATTERN	GAGE SERIES See Note 1	GAGE RESISTANCE (ohms)	GAGE LENGTH	
			inches	millimeters
<p>250WQ</p>  <p>actual size</p>	CEA	350	0.25	6.35
<p>Two-element 90° tee stacked rosette. Maximum operating temperature + 150°F (+65°C). Exposed solder tab area is 0.11 x 0.07 in (2.8 x 1.8 mm). Matrix size: 0.55L x 0.55W in. (14.0L x 14.0W mm)</p>				
<p>250WT</p>  <p>actual size</p>	WA, WD, WK, SA, SK, SD	120, 350	0.25	6.35
<p>Two-element 90° tee stacked rosette. Matrix size: 0.51L x 0.60W in. (13.0L x 15.2W mm)</p>				

Note 1: Products with designations and options shown in bold are not RoHS compliant.

See www.vishay.com/strain-gages for complete specifications.



Rectangular Rosettes

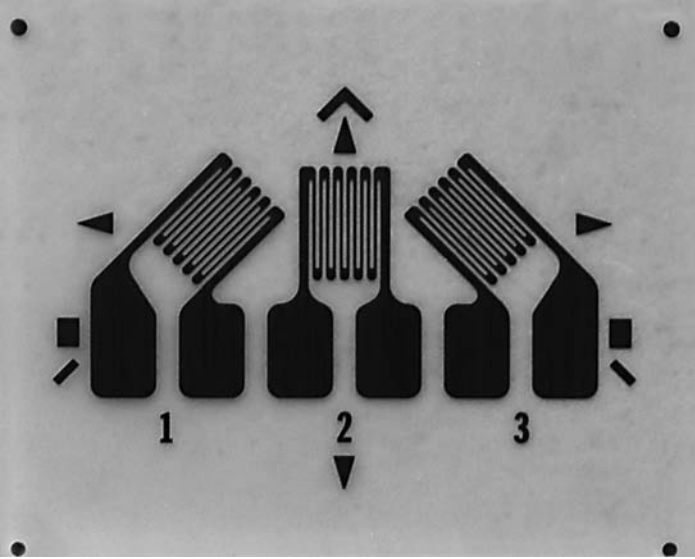
FEATURES

- Gage patterns designed for determining principle stresses and strains
- All patterns have three grids oriented at 0°, 45° and 90° angles
- Both stacked and planar constructions available
- Gage lengths from 0.031" (0.79mm) to 0.250" (6.35mm)

Patterns

031RB	82
031WW.....	83
060WR	84
062LR.....	85
062UR	86
062WW.....	87
120WR	88
125LR.....	89
125RA	90
125UR	91
125WW.....	92
250LR.....	93
250UR	94
250WW.....	95
Other Rectangular Rosettes.....	96

General Purpose Strain Gages - Rectangular Pattern

GAGE PATTERN DATA					
 <p style="text-align: center;">actual size</p>			GAGE DESIGNATION See Note 1, 3	RESISTANCE (OHMS) See Note 2	OPTIONS AVAILABLE See Note 3
			EA-XX-031RB-120 EP-08-031RB-120 SA-XX-031RB-120	120 ± 0.4% 120 ± 0.4% 120 ± 0.8%	E, SE , L, LE
DESCRIPTION Miniature 45° rectangular single-plane rosette with compact geometry.					
GAGE DIMENSIONS					
			Legend: ES = Each Section S = Section (S1 = Sec 1)	CP = Complete Pattern M = Matrix	<input type="checkbox"/> inch <input checked="" type="checkbox"/> millimeter
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.031ES	0.085 CP	0.031 ES	0.175 CP	0.19	0.30
0.79 ES	2.16 CP	0.79 ES	4.45 CP	4.8	6.1

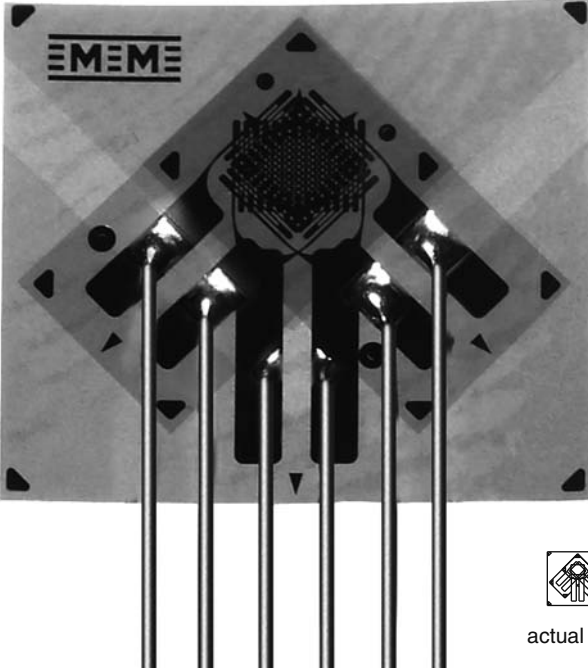




GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
EA	Constantan foil in combination with a tough, flexible, polyimide backing.	±3%	-100° to +350°F [-75° to +175°C]
EP	Annealed constantan foil with tough, high-elongation polyimide backing.	±10%	-100° to +400°F [-75° to +205°C]
SA	Fully encapsulated constantan gages with solder dots.	±2%	-100° to +400°F [-75° to +205°C]

Note 1: Insert desired S-T-C number in spaces marked XX.

Note 2: Tolerance is increased when Option W, E, SE, LE, or P is specified.

Note 3: Products with designations and options shown in bold are not RoHS compliant.

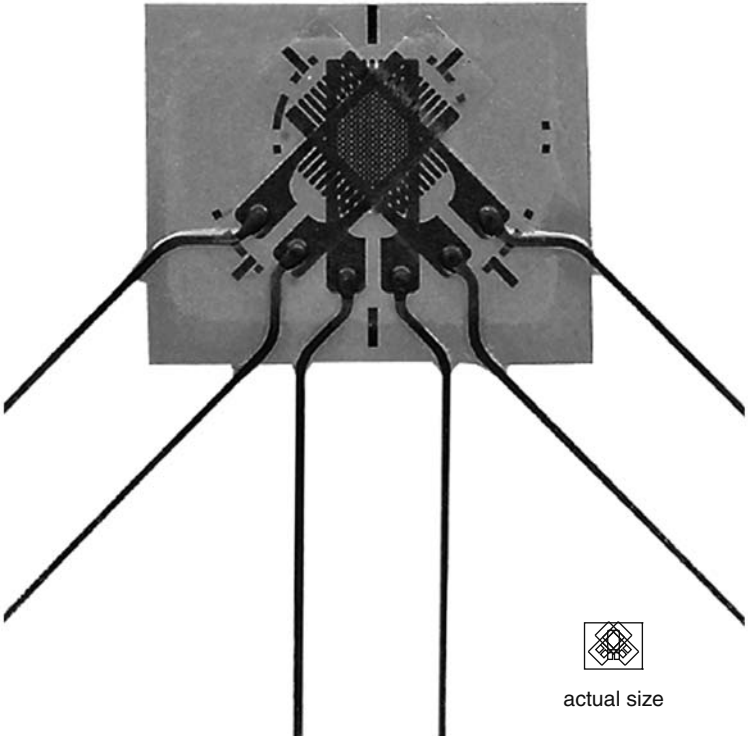
General Purpose Strain Gages - Stacked Rosette

GAGE PATTERN DATA					
  actual size			GAGE DESIGNATION See Note 1	RESISTANCE (OHMS)	OPTIONS AVAILABLE
			L2A-XX-031WW-120 L2A-XX-031WW-350 C2A-XX-031WW-120 C2A-XX-031WW-350	120 ± 0.6% 350 ± 0.6% 120 ± 0.6% 350 ± 0.6%	
DESCRIPTION Stacked, 0°-45°-90° rosette for use in applications involving limited gaging areas or steep strain gradients.					 RoHS COMPLIANT
GAGE DIMENSIONS			Legend: ES = Each Section S = Section (S1 = Sec 1)	CP = Complete Pattern M = Matrix	<input type="checkbox"/> inch <input type="checkbox"/> millimeter
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.031 ES	0.206 CP	0.070 ES	0.227 CP	0.278	0.315
0.79 ES	5.23 CP	1.79 ES	5.77 CP	7.06	8.00
GAGE SERIES DATA					
See Gage Series data sheet for complete specifications.					
Series	Description	Strain Range	Temperature Range (See Note 2)		
L2A	Encapsulated constantan gages with preattached ribbon leads.	±3%	-100° to +150°F [-75° to +65°C]		
C2A	Encapsulated constantan gages with preattached ready-to-use cables.	±3%	-60° to +150°F [-50° to +65°C]		
 Example of an L2A Construction		 Example of a C2A Construction			

Note 1: Insert desired S-T-C number in spaces marked XX.

Note 2: Upper use range is reduced to these values for stacked patterns.

General Purpose Strain Gages - Rectangular Rosette

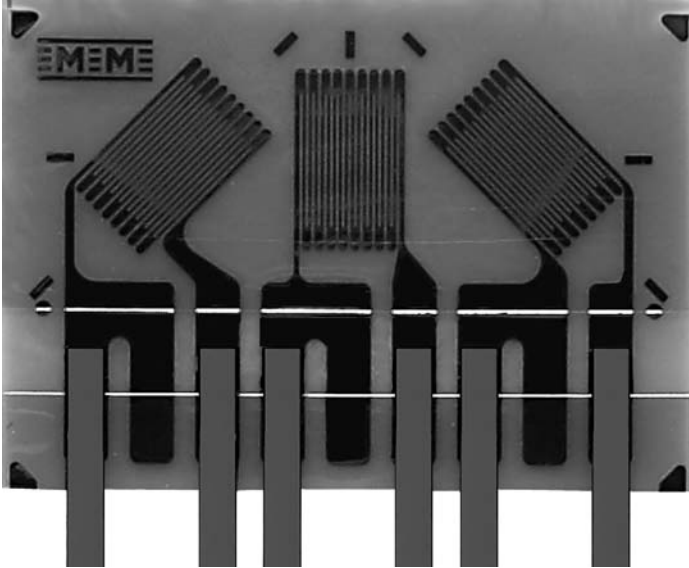




GAGE PATTERN DATA					
 <p style="text-align: center;">actual size</p>			GAGE DESIGNATION See Note 1, 2	RESISTANCE (OHMS)	OPTIONS AVAILABLE See Note 2
			WA-XX-060WR-120 WK-XX-060WR-120 WK-XX-060WR-350 WK-XX-060WR-10C SA-XX-060WR-120 SK-XX-060WR-120 SK-XX-060WR-350 SK-XX-060WR-10C	120 ± 0.5% 120 ± 0.5% 350 ± 0.5% 1000 ± 0.5% 120 ± 0.5% 120 ± 0.5% 350 ± 0.5% 1000 ± 0.5%	
DESCRIPTION Small three-element 45° rectangular stacked rosette.					
GAGE DIMENSIONS					
			Legend: ES = Each Section S = Section (S1 = Sec 1)	CP = Complete Pattern M = Matrix	<input type="checkbox"/> inch <input checked="" type="checkbox"/> millimeter
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.060 ES	0.24 M	0.060 ES	0.30 M	0.24	0.30
1.52 ES	6.1 M	1.52 ES	7.6 M	6.1	7.6

GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
WA	Fully encapsulated constantan gages with high-endurance leadwires.	±2%	-100° to +400°F [-75° to +205°C]
WK	Fully encapsulated K-alloy gages with high-endurance leadwires.	±1.5%	-452° to +550°F [-269° to +290°C]
SA	Fully encapsulated constantan gages with solder dots.	±2%	-100° to +400°F [-75° to +205°C]
SK	Fully encapsulated K-alloy gages with solder dots.	±1.5%	-452° to +450°F [-269° to +230°C]

Note 1: Insert desired S-T-C number in spaces marked XX.

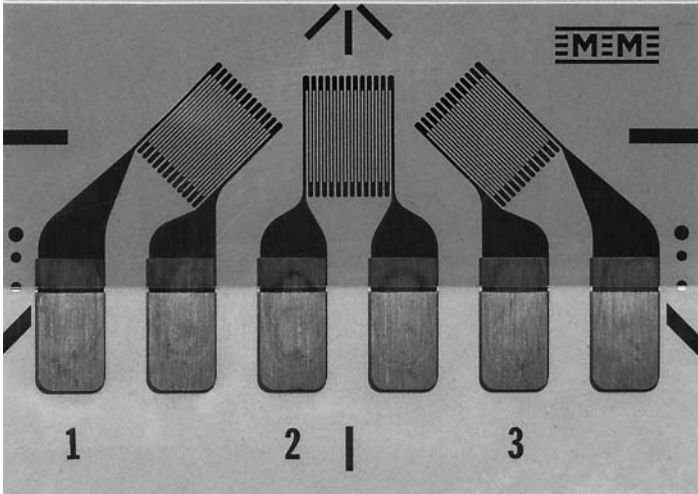

Note 2: Products with designations and options shown in bold are not RoHS compliant.

General Purpose Strain Gages - Rectangular Rosette

GAGE PATTERN DATA					
  actual size			GAGE DESIGNATION See Note 1	RESISTANCE (OHMS)	OPTIONS AVAILABLE
			L2A-XX-062LR-120 L2A-XX-062LR-350 C2A-XX062LR-120 C2A-XX-062LR-350	120 ± 0.6% 350 ± 0.6% 120 ± 0.6% 350 ± 0.6%	
DESCRIPTION Small 45° rectangular single-plane rosette.					 RoHS COMPLIANT
GAGE DIMENSIONS		Legend: ES = Each Section S = Section (S1 = Sec 1)		CP = Complete Pattern M = Matrix	
				<input type="checkbox"/> inch	<input type="checkbox"/> millimeter
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.062	0.185	0.050	0.260	0.277	0.410
1.52	4.70	1.27	6.60	7.04	10.41
GAGE SERIES DATA					
See Gage Series data sheet for complete specifications.					
Series	Description	Strain Range	Temperature Range		
L2A	Encapsulated constantan gages with preattached ribbon leads.	±3%	-100° to +250°F [-75° to +120°C]		
C2A	Encapsulated constantan gages with preattached ready-to-use cables.	±3%	-60° to +180°F [-50° to +80°C]		
 Example of an L2A Construction		 Example of a C2A Construction			

Note 1: Insert desired S-T-C number in spaces marked XX.

General Purpose Strain Gages - Rectangular Rosette

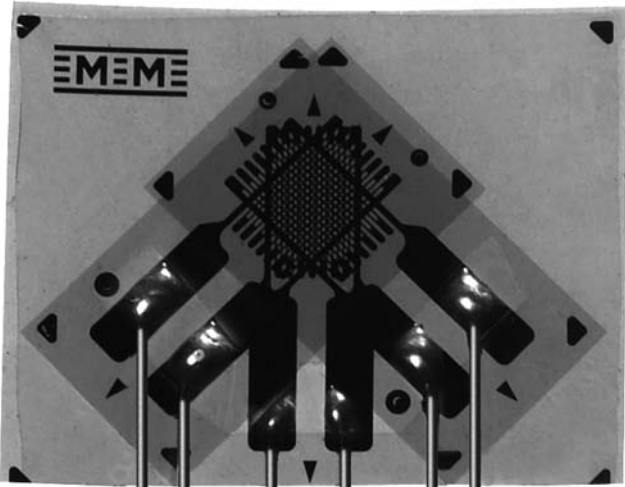


GAGE PATTERN DATA					
			GAGE DESIGNATION See Note 1	RESISTANCE (OHMS)	OPTIONS AVAILABLE See Note 2
			CEA-XX-062UR-120 CEA-XX-062UR-350	120 ± 0.4% 350 ± 0.4%	P2 P2
 <p>actual size</p>			DESCRIPTION Small 45° rectangular single-plane rosette in a compact geometry. Exposed solder tab area 0.07 x 0.04 in [1.8 x 1.0 mm]		
GAGE DIMENSIONS		Legend: ES = Each Section S = Section (S1 = Sec 1)		CP = Complete Pattern M = Matrix	
	inch				
	millimeter				
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.062 ES	0.222 CP	0.062 ES	0.420 CP	0.32	0.48
1.57 ES	5.64 CP	1.57 ES	10.67 CP	8.1	12.2

GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
CEA	Universal general-purpose strain gages.	±3%	-100° to +350°F [-75° to +175°C]



Note 1: Insert desired S-T-C number in spaces marked XX.

Note 2: Products with designations and options shown in bold are not RoHS compliant.

General Purpose Strain Gages - Stacked Rosette

GAGE PATTERN DATA			
	<p>GAGE DESIGNATION</p> <p>See Note 1</p>	<p>RESISTANCE (OHMS)</p>	<p>OPTIONS AVAILABLE</p>
	<p>L2A-XX-062WW-120 L2A-XX-062WW-350 C2A-XX-062WW-120 C2A-XX-062WW-350</p>	<p>120 ± 0.6% 350 ± 0.6% 120 ± 0.6% 350 ± 0.6%</p>	
 <p>actual size</p>	<p>DESCRIPTION</p> <p>Stacked, 0°-45°-90° rosette for use in applications involving limited gaging areas or steep strain gradients.</p>	 <p>RoHS COMPLIANT</p>	

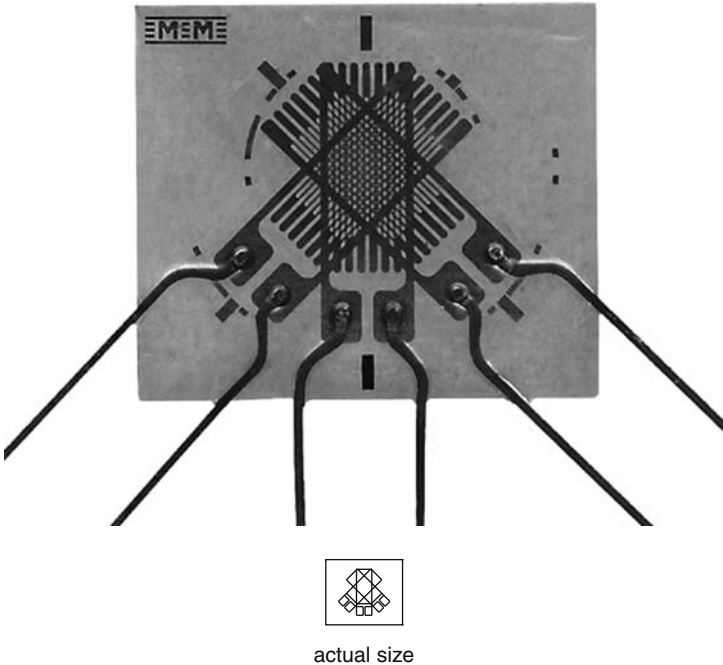
GAGE DIMENSIONS					
Legend:			ES = Each Section	CP = Complete Pattern	inch
			S = Section (S1 = Sec 1)	M = Matrix	millimeter
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.062 ES	0.180 CP	0.050 ES	0.235 CP	0.262	0.323
1.57 ES	4.57 CP	1.27 ES	6.00 CP	7.16	8.20

GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range (See Note 2)
L2A	Encapsulated constantan gages with preattached ribbon leads.	±3%	-100° to +150°F [-75° to +65°C]
C2A	Encapsulated constantan gages with preattached ready-to-use cables.	±3%	-60° to +150°F [-50° to +65°C]
 <p>Example of an L2A Construction</p>		 <p>Example of a C2A Construction</p>	

Note 1: Insert desired S-T-C number in spaces marked XX.

Note 2: Upper use range is reduced to these values for stacked patterns.

General Purpose Strain Gages - Rectangular Rosette

GAGE PATTERN DATA					
 <p>actual size</p>			GAGE DESIGNATION See Note 1, 3	RESISTANCE (OHMS) See Note 2	OPTIONS AVAILABLE See Note 3
			WA-XX-120WR-120 WA-XX-120WR-350 WD-DY-120WR-350 WK-XX-120WR-120 WK-XX-120WR-350 SA-XX-120WR-120 SA-XX-120WR-350 SK-XX-120WR-120 SK-XX-120WR-350 SD-DY-120WR-350	120 ± 0.5% 350 ± 0.5% 350 ± 0.5% 120 ± 0.5% 350 ± 0.5% 120 ± 0.5% 350 ± 0.5% 120 ± 0.5% 350 ± 0.5% 350 ± 0.5%	W W W* W W
			DESCRIPTION Three-element 45° rectangular stacked rosette.		
GAGE DIMENSIONS					
			Legend: ES = Each Section S = Section (S1 = Sec 1)	CP = Complete Pattern M = Matrix	<input type="checkbox"/> inch <input checked="" type="checkbox"/> millimeter
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.120 ES	0.34 M	0.080 ES	0.040 M	0.34	0.40
3.05 ES	8.6 M	2.03 ES	10.2 M	8.6	10.2

GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
WA	Fully encapsulated constantan gages with high-endurance leadwires.	±2%	-100° to +400°F [-75° to +205°C]
WD	Fully encapsulated isoelastic gages with high-endurance leadwires.	±1.5%	-320° to +500°F [-195° to +260°C]
WK	Fully encapsulated K-alloy gages with high-endurance leadwires.	±1.5%	-452° to +550°F [-269° to +290°C]
SA	Fully encapsulated constantan gages with solder dots.	±2%	-100° to +400°F [-75° to +205°C]
SK	Fully encapsulated K-alloy gages with solder dots.	±1.5%	-452° to +450°F [-269° to +230°C]
SD	Equivalent to WD Series, but with solder dots instead of leadwires.	±1.5%	-320° to +400°F [-195° to +205°C]

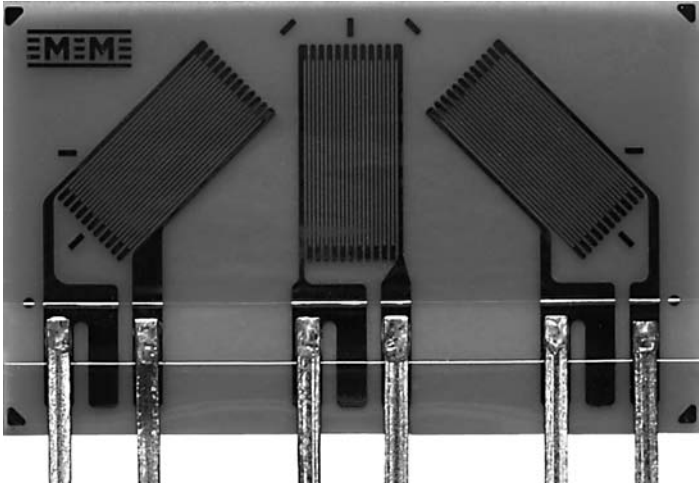




Note 1: Insert desired S-T-C number in spaces marked XX.

Note 2: Tolerance is increased when Option W, E, SE, LE, or P is specified.

Note 3: Products with designations and options shown in bold are not RoHS compliant.

*Options available but not normally recommended. See Optional Features data sheet for details.

General Purpose Strain Gages - Rectangular Rosette

GAGE PATTERN DATA					
  <p>actual size</p>			<p>GAGE DESIGNATION</p> <p>See Note 1</p>	<p>RESISTANCE (OHMS)</p>	<p>OPTIONS AVAILABLE</p>
			<p>L2A-XX-125LR-120 L2A-XX-125LR-350 C2A-XX-125LR-120 C2A-XX-125LR-350</p>	<p>120 ± 0.6% 350 ± 0.6% 120 ± 0.6% 350 ± 0.6%</p>	
<p>DESCRIPTION</p> <p>General-purpose 45° rectangular single-plane rosette.</p>					 <p>RoHS COMPLIANT</p>
<p>GAGE DIMENSIONS</p>			<p>Legend: ES = Each Section S = Section (S1 = Sec 1)</p>	<p>CP = Complete Pattern M = Matrix</p>	<p>inch millimeter</p>
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.125	0.245	0.070	0.415	0.290	0.475
3.18	6.22	1.78	10.54	7.37	12.06
GAGE SERIES DATA					
See Gage Series data sheet for complete specifications.					
Series	Description	Strain Range	Temperature Range		
L2A	Encapsulated constantan gages with preattached ribbon leads.	±3%	-100° to +250°F [-75° to +120°C]		
C2A	Encapsulated constantan gages with preattached ready-to-use cables.	±3%	-60° to +180°F [-50° to +80°C]		
 <p>Example of an L2A Construction</p>			 <p>Example of a C2A Construction</p>		

Note 1: Insert desired S-T-C number in spaces marked XX.

General Purpose Strain Gages - Rectangular Rosette

GAGE PATTERN DATA					
			GAGE DESIGNATION See Note 1, 3	RESISTANCE (OHMS) See Note 2	OPTIONS AVAILABLE See Note 3
			EA-XX-125RA-120 EK-XX-125RA-350 WA-XX-125RA-120 WK-XX-125RA-350 EP-08-125RA-120 SA-XX-125RA-120 SK-XX-125RA-350	120 ± 0.2% 350 ± 0.2% 120 ± 0.4% 350 ± 0.4% 120 ± 0.2% 120 ± 0.4% 350 ± 0.4%	W, E, L, LE W, SE W* W*
DESCRIPTION General-purpose three-element 45° rectangular rosette. Compact geometry. See also 125RD and 125UR patterns. EK-Series gages are supplied with duplex copper pads (DP) when optional feature W or SE is not specified.					
GAGE DIMENSIONS			Legend: ES = Each Section S = Section (S1 = Sec 1)	CP = Complete Pattern M = Matrix	<input type="checkbox"/> inch <input checked="" type="checkbox"/> millimeter
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.125 ES	0.275 CP	0.062 ES	0.424 CP	0.39	0.46
3.18 ES	6.99 CP	1.57 ES	10.77 CP	9.9	11.7

GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
EA	Constantan foil in combination with a tough, flexible, polyimide backing.	±3%	-100° to +350°F [-75° to +175°C]
EK	K-alloy foil in combination with a tough, flexible polyimide backing.	±1.5%	-320° to +350°F [-195° to +175°C]
WA	Fully encapsulated constantan gages with high-endurance leadwires.	±2%	-100° to +400°F [-75° to +205°C]
WK	Fully encapsulated K-alloy gages with high-endurance leadwires.	±1.5%	-452° to +550°F [-269° to +290°C]
EP	Annealed constantan foil with tough, high-elongation polyimide backing.	±20%	-100° to +400°F [-75° to +205°C]
SA	Fully encapsulated constantan gages with solder dots.	±2%	-100° to +400°F [-75° to +205°C]
SK	Fully encapsulated K-alloy gages with solder dots.	±1.5%	-452° to +450°F [-269° to +230°C]

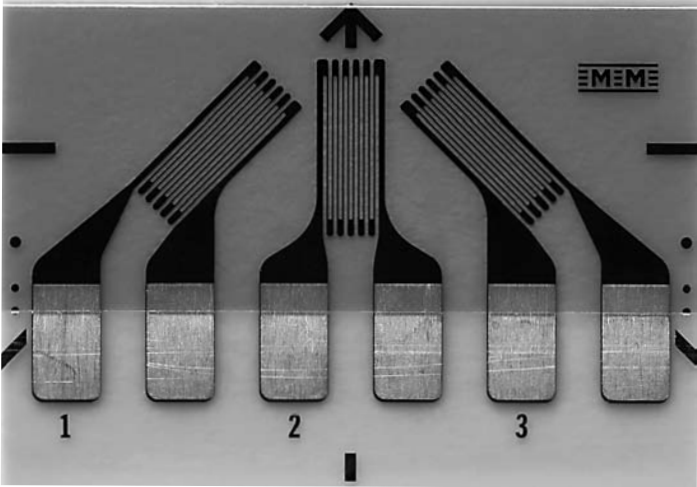

Note 1: Insert desired S-T-C number in spaces marked XX.

Note 2: Tolerance is increased when Option W, E, SE, LE, or P is specified.

Note 3: Products with designations and options shown in bold are not RoHS compliant.

*Options available but not normally recommended. See Optional Features data sheet for details.

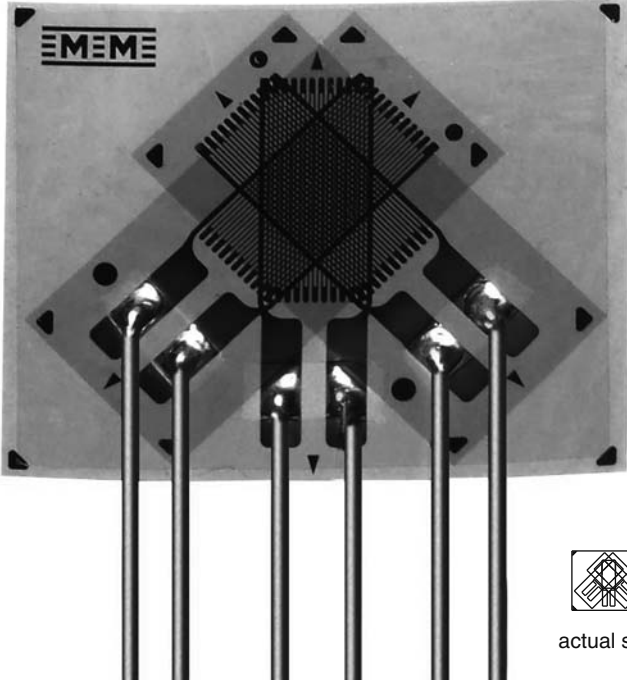


General Purpose Strain Gages - Rectangular Rosette

GAGE PATTERN DATA					
  <p>actual size</p>			GAGE DESIGNATION See Note 1	RESISTANCE (OHMS) 120 ± 0.4% 350 ± 0.4%	OPTIONS AVAILABLE See Note 2
			CEA-XX-125UR-120 CEA-XX-125UR-350	P2	DESCRIPTION General-purpose 45° single-plane rosette. Compact geometry. Exposed solder tab area 0.08 x 0.06 in [2.0 x 1.5 mm].
GAGE DIMENSIONS			Legend: ES = Each Section S = Section (S1 = Sec 1)	CP = Complete Pattern M = Matrix	<input type="checkbox"/> inch <input checked="" type="checkbox"/> millimeter
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.125 ES	0.300 CP	0.060 ES	0.560 CP	0.42	0.62
3.18 ES	7.62 CP	1.52 ES	14.22 CP	10.7	15.7
GAGE SERIES DATA					
See Gage Series data sheet for complete specifications.					
Series	Description	Strain Range	Temperature Range		
CEA	Universal general-purpose strain gages.	±5%	-100° to +350°F [-75° to +175°C]		


Note 1: Insert desired S-T-C number in spaces marked XX.

Note 2: Products with designations and options shown in bold are not RoHS compliant.


General Purpose Strain Gages - Stacked Rosette

GAGE PATTERN DATA					
  actual size			GAGE DESIGNATION See Note 1	RESISTANCE (OHMS)	OPTIONS AVAILABLE
			L2A-XX-125WW-120 L2A-XX-125WW-350 C2A-XX-125WW-120 C2A-XX-125WW-350	120 ± 0.6% 350 ± 0.6% 120 ± 0.6% 350 ± 0.6%	
DESCRIPTION Stacked, 0°-45°-90° rosette for use in applications involving limited gaging areas or steep strain gradients.					
GAGE DIMENSIONS			Legend: ES = Each Section S = Section (S1 = Sec 1)	CP = Complete Pattern M = Matrix	<input type="checkbox"/> inch <input type="checkbox"/> millimeter
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.125 ES	0.241 CP	0.070 ES	0.280 CP	0.309	0.375
3.18 ES	6.12 CP	1.78 ES	7.11 CP	7.85	9.53

GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range (See Note 2)
L2A	Encapsulated constantan gages with preattached ribbon leads.	±3%	-100° to +150°F [-75° to +65°C]
C2A	Encapsulated constantan gages with preattached ready-to-use cables.	±3%	-60° to +150°F [-50° to +65°C]



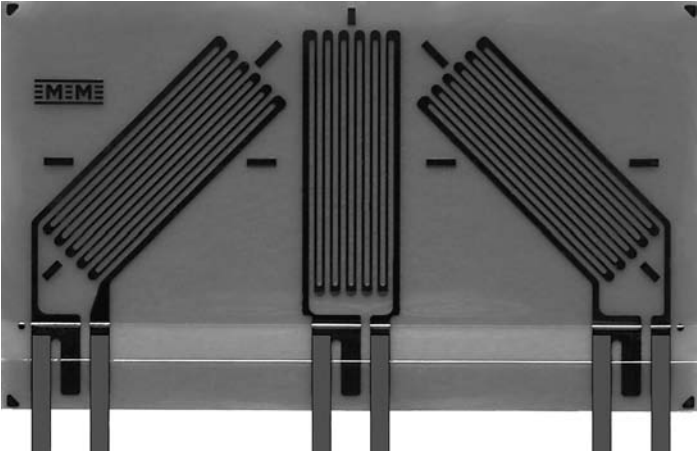




Example of an L2A Construction



Example of a C2A Construction

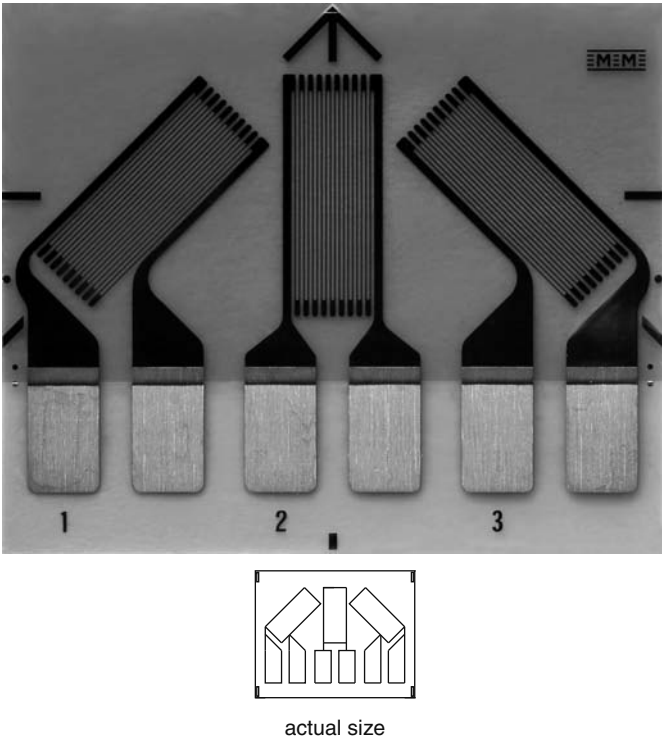
Note 1: Insert desired S-T-C number in spaces marked XX.
Note 2: Upper use range is reduced to these values for stacked patterns.

General Purpose Strain Gages - Rectangular Rosette

GAGE PATTERN DATA					
			GAGE DESIGNATION See Note 1	RESISTANCE (OHMS)	OPTIONS AVAILABLE
			L2A-XX-250LR-120 L2A-XX-250LR-350 C2A-XX-250LR-120 C2A-XX-250LR-350	120 ± 0.6% 350 ± 0.6% 120 ± 0.6% 350 ± 0.6%	
 actual size			DESCRIPTION General-purpose 45° rectangular single-plane rosette.	 RoHS COMPLIANT	
GAGE DIMENSIONS			Legend: ES = Each Section S = Section (S1 = Sec 1)	CP = Complete Pattern M = Matrix	<input type="checkbox"/> inch <input type="checkbox"/> millimeter
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.250	0.373	0.100	0.655	0.420	0.715
6.35	9.47	2.54	16.64	10.67	18.16
GAGE SERIES DATA					
See Gage Series data sheet for complete specifications.					
Series	Description	Strain Range	Temperature Range		
L2A	Encapsulated constantan gages with preattached ribbon leads.	±3%	-100° to +250°F [-75° to +120°C]		
C2A	Encapsulated constantan gages with preattached ready-to-use cables.	±3%	-60° to +180°F [-50° to +80°C]		
					
Example of an L2A Construction			Example of a C2A Construction		

Note 1: Insert desired S-T-C number in spaces marked XX.

General Purpose Strain Gages - Rectangular Rosette

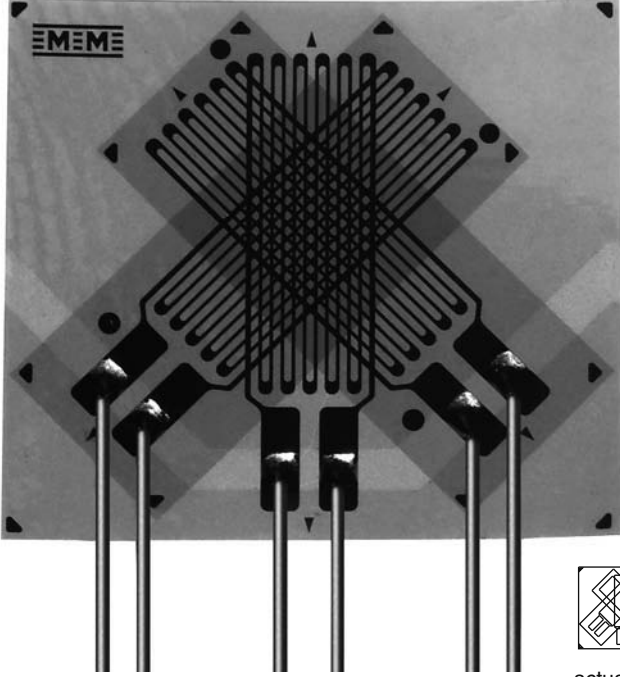



GAGE PATTERN DATA					
			GAGE DESIGNATION See Note 1	RESISTANCE (OHMS) 120 ± 0.4% 350 ± 0.4%	OPTIONS AVAILABLE See Note 2
			CEA-XX-250UR-120 CEA-XX-250UR-350		P2 P2
DESCRIPTION Large three-element 45° single-plane rosette. Exposed solder tab area 0.13 x 0.08 in [3.3 x 2.0 mm].					
GAGE DIMENSIONS		Legend: ES = Each Section S = Section (S1 = Sec 1)		CP = Complete Pattern M = Matrix	
	inch				
	millimeter				
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.250 ES	0.500 CP	0.120 ES	0.760 CP	0.65	0.80
6.35 ES	12.70 CP	3.05 ES	19.30 CP	16.5	20.3

GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
CEA	Universal general-purpose strain gages.	±5%	-100° to +350°F [-75° to +175°C]

Note 1: Insert desired S-T-C number in spaces marked XX.

Note 2: Products with designations and options shown in bold are not RoHS compliant.













General Purpose Strain Gages - Stacked Rosette

GAGE PATTERN DATA					
 <p>actual size</p>			GAGE DESIGNATION See Note 1	RESISTANCE (OHMS)	OPTIONS AVAILABLE
			L2A-XX-250WW-120 L2A-XX-250WW-350 C2A-XX-250WW-120 C2A-XX-250WW-350	120 ± 0.6% 350 ± 0.6% 120 ± 0.6% 350 ± 0.6%	
DESCRIPTION Stacked, 0°-45°-90° rosette for use in applications involving limited gaging areas or steep strain gradients.					
GAGE DIMENSIONS			Legend: ES = Each Section S = Section (S1 = Sec 1)	CP = Complete Pattern M = Matrix	<input type="checkbox"/> inch <input type="checkbox"/> millimeter
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.250 ES	0.362 CP	0.100 ES	0.375 CP	0.418	0.477
6.35 ES	9.19 CP	2.54 ES	9.53 CP	10.62	12.12
GAGE SERIES DATA					
See Gage Series data sheet for complete specifications.					
Series	Description	Strain Range	Temperature Range (See Note 2)		
L2A	Encapsulated constantan gages with preattached ribbon leads.	±3%	-100° to +150°F [-75° to +65°C]		
C2A	Encapsulated constantan gages with preattached ready-to-use cables.	±3%	-60° to +150°F [-50° to +65°C]		
 <p>Example of an L2A Construction</p>			 <p>Example of a C2A Construction</p>		

Note 1: Insert desired S-T-C number in spaces marked XX.

Note 2: Upper use range is reduced to these values for stacked patterns.











General Purpose Strain Gages

GAGE PATTERN	GAGE SERIES See Note 1	GAGE RESISTANCE (ohms)	GAGE LENGTH	
			inches	millimeters
015RC   actual size	EA, SA	120	0.015	0.38
	Micro-miniature three-element 45° rosette with one tab common to all sections. See also 015RJ pattern. Note: See Strip Patterns datasheet for discussion of common-tab gages. Matrix size: 0.18L x 0.23W in. (4.6L x 5.8W mm)			
015RJ   actual size	EA, SA	120	0.015	0.38
	Micro-miniature three-element 45° rosette. Similar to 015RC pattern except each section has separate tabs for electrical isolation. Matrix size: 0.19L x 0.23W in. (4.8L x 5.8W mm)			
030WR   actual size	WA, WK, SA, SK	120	0.03	0.76
	Miniature three-element 45° rectangular stacked rosette. Matrix size: 0.18L x 0.19W in. (4.6L x 4.8W mm)			
031RB   actual size	EA, EP, SA	120	0.031	0.79
	Miniature 45° rectangular single-plane rosette with compact geometry. Matrix size: 0.19L x 0.24W in. (4.8L x 6.1W mm)			
062RB   actual size	EA, WA, WK, EP, SA, SK	120, 350	0.062	1.57
	Small 45° rectangular single-plane rosette with compact geometry. Matrix size: 0.42L x 0.46W in. (10.7L x 11.7W mm)			
062RF   actual size	EA, SA	350	0.062	1.57
	Small 45° rectangular single-plane rosette designed for use with Option W. Matrix size: 0.25L x 0.46W in. (6.4L x 11.7W mm)			

Note 1: Products with designations and options shown in bold are not RoHS compliant.

See www.vishay.com/strain-gages for complete specifications.

General Purpose Strain Gages

GAGE PATTERN	GAGE SERIES See Note 1	GAGE RESISTANCE (ohms)	GAGE LENGTH	
			inches	millimeters
120WR   <p>actual size</p>	WA, WD, WK, SA, SK, SD	120, 350	0.12	3.05
<p>Three-element 45° rectangular stacked rosette. Matrix size: 0.34L x 0.40W in. (8.6L x 10.2W mm)</p>				
125RD   <p>actual size</p>	EA, WA, SA	350	0.125	3.18
<p>General-purpose three-element 45° rectangular rosette. Similar to 125RA pattern except for grid resistance. Matrix size: 0.40L x 0.47W in. (10.1L x 11.9W mm)</p>				
250RA   <p>actual size</p>	EA, WA, WK, EP, SA, SK	120, 350	0.25	6.35
<p>Large three-element 45° rectangular rosette with convenient solder tab arrangement. See also 250RD pattern. Matrix size: 0.78L x 0.93W in. (19.8L x 23.6W mm)</p>				
250RD   <p>actual size</p>	EA, EK, S2K, WA, WK, EP, SA, SK	350, 1000	0.25	6.35
<p>Large three-element 45° rectangular rosette. Similar to the 250RA pattern except for resistance. EK-Series gages are supplied with duplex copper pads (DP) when optional feature W or SE is not specified. Matrix size: 0.78L x 0.93W in. (19.8L x 23.6W mm)</p>				
250WR   <p>actual size</p>	WA, WD, WK, SA, SK, SD	120, 350	0.25	6.35
<p>Three-element 45° rectangular stacked rosette. Matrix size: 0.51L x 0.60W in. (13.0L x 15.2W mm)</p>				

Note 1: Products with designations and options shown in bold are not RoHS compliant.

See www.vishay.com/strain-gages for complete specifications.



Patterns







Other Delta Rosettes..... 100

Delta Rosettes (General Use)

FEATURES

- Gage patterns designed for determining principle stresses and strains
- All patterns have three grids oriented at 0°, 60° and 120° angles
- Both stacked and planar constructions available
- Gage lengths from 0.30" (0.76mm) to 0.125" (3.18mm)

General Purpose Strain Gages

GAGE PATTERN	GAGE SERIES See Note 1	GAGE RESISTANCE (ohms)	GAGE LENGTH	
			inches	millimeters
030YB   actual size	EA, SA	120	0.03	0.76
	Miniature three-element 60° delta single-plane rosette. Matrix size: 0.21L x 0.27W in. (5.3L x 6.9W mm)			
060WY   actual size	WA, WK, SA, SK	120, 350, 1000	0.06	1.52
	Small three-element 60° delta stacked rosette. Matrix size: 0.24L x 0.30W in. (6.1L x 7.6W mm)			
125UY   actual size	CEA	120, 350	0.125	3.18
	Three-element 60° delta single-plane rosette. Matrix size: 0.50L x 0.44W in. (12.7L x 11.2W mm)			

Note 1: Products with designations and options shown in bold are not RoHS compliant.

See www.vishay.com/strain-gages for complete specifications.



Shear/Torque Rosettes (General Use)

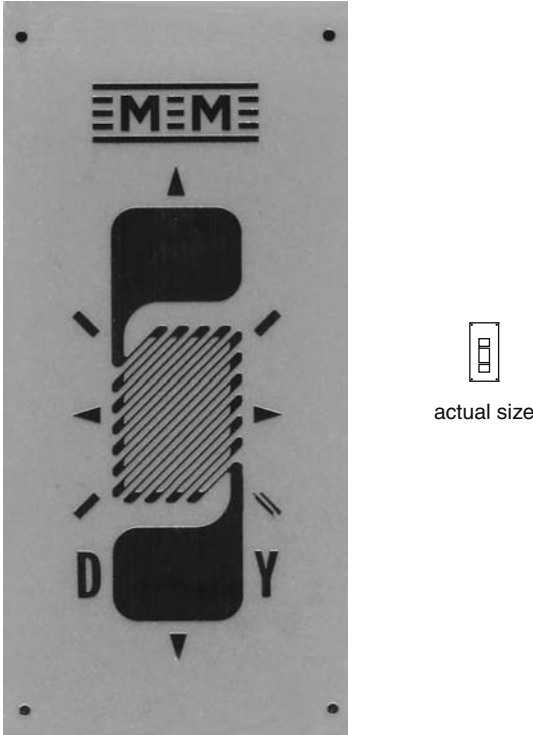
FEATURES

- Gage patterns designed for measuring shear strain and torque
- Individual and multiple grid patterns
- Gage lengths from 0.062" (1.57mm) to 0.250" (6.35mm)

Patterns

062DY	102
062LV	103
062TH.....	104
062TV	105
062UV	106
125TK.....	107
187UV	108
250US	109
Other Shear/Torque Patterns	110

General Purpose Strain Gages - Shear/Torque Pattern

GAGE PATTERN DATA					
			GAGE DESIGNATION See Note 1, 3	RESISTANCE (OHMS) See Note 2	OPTIONS AVAILABLE See Note 3
			EA-XX-062DY-120 ED-DY-062DY-350 WA-XX-062DY-120 WK-XX-062DY-350 SA-XX-062DY-350 SK-XX-062DY-350 SD-DY-062DY-350 WD-DY-062DY-350	120 ± 0.15% 350 ± 0.4% 120 ± 0.3% 350 ± 0.3% 120 ± 0.3% 350 ± 0.3% 350 ± 0.8% 350 ± 0.8%	E, L, LE E, L*, LE*
DESCRIPTION 45° torque gage. Similar to 062DW pattern but with opposite grid angle.					
GAGE DIMENSIONS					
Legend:			ES = Each Section	CP = Complete Pattern	inch
			S = Section (S1 = Sec 1)	M = Matrix	millimeter
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.062	0.175	0.055	0.055	0.30	0.15
1.57	4.45	1.40	1.40	7.6	3.8

GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
EA	Constantan foil in combination with a tough, flexible, polyimide backing.	±3%	-100° to +350°F (-75° to +175°C)
ED	Isoelastic foil in combination with tough, flexible polyimide film.	±2%	-320° to +400°F (-195° to +205°C)
WA	Fully encapsulated constantan gages with high-endurance leadwires.	±2%	-100° to +400°F (-75° to +205°C)
WK	Fully encapsulated K-alloy gages with high-endurance leadwires.	±1.5%	-452° to +550°F (-269° to +290°C)
SA	Fully encapsulated constantan gages with solder dots.	±2%	-100° to +400°F (-75° to +205°C)
SK	Fully encapsulated K-alloy gages with solder dots.	±1.5%	-452° to +450°F (-269° to +230°C)
SD	Equivalent to WD Series, but with solder dots instead of leadwires.	±1.5%	-320° to +400°F (-195° to +205°C)
WD	Fully encapsulated isoelastic gages with high-endurance leadwires.	±1.5%	-320° to +500°F (-195° to +260°C)

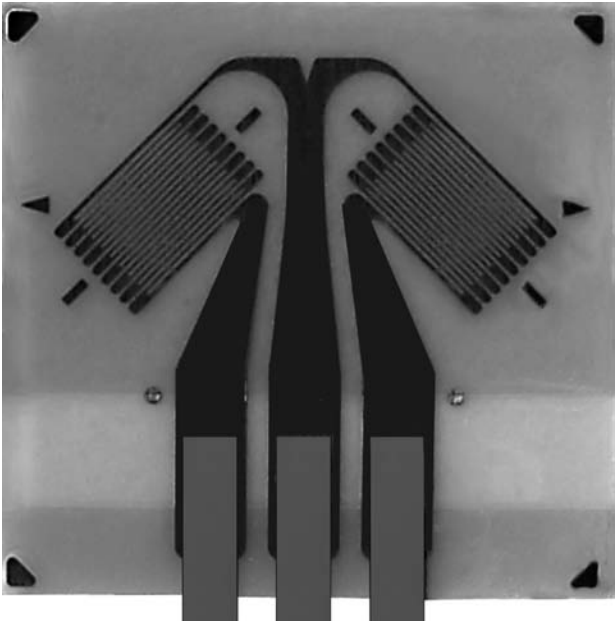




Note 1: Insert desired S-T-C number in spaces marked XX.

Note 2: Tolerance is increased when Option W, E, SE, LE, or P is specified.

Note 3: Products with designations and options shown in bold are not RoHS compliant.

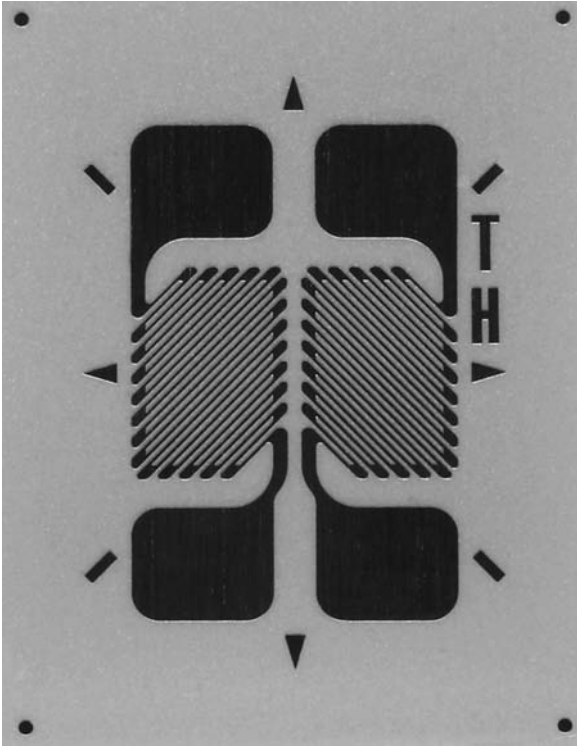

*Options available but not normally recommended. See Optional Features data sheet for details.

General Purpose Strain Gages - Shear/Torque Pattern

GAGE PATTERN DATA																							
  actual size			GAGE DESIGNATION See Note 1	RESISTANCE (OHMS) 120 ± 0.6%	OPTIONS AVAILABLE																		
			L2A-XX-062LV-120 C2A-XX-062LV-120	120 ± 0.6% 120 ± 0.6%																			
DESCRIPTION Two-element 90° torque gage.																							
GAGE DIMENSIONS			Legend: ES = Each Section S = Section (S1 = Sec 1)	CP = Complete Pattern M = Matrix	<table border="1"> <tr> <td>inch</td> </tr> <tr> <td>millimeter</td> </tr> </table>	inch	millimeter																
inch																							
millimeter																							
<table border="1"> <thead> <tr> <th>Gage Length</th> <th>Overall Length</th> <th>Grid Width</th> <th>Overall Width</th> <th>Matrix Length</th> <th>Matrix Width</th> </tr> </thead> <tbody> <tr> <td>0.062 ES</td> <td>0.214 CP</td> <td>0.050 ES</td> <td>0.215 CP</td> <td>0.255</td> <td>0.265</td> </tr> <tr> <td>1.52 ES</td> <td>5.44 CP</td> <td>1.27 ES</td> <td>5.46 CP</td> <td>6.48</td> <td>6.73</td> </tr> </tbody> </table>	Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width	0.062 ES	0.214 CP	0.050 ES	0.215 CP	0.255	0.265	1.52 ES	5.44 CP	1.27 ES	5.46 CP	6.48	6.73					
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width																		
0.062 ES	0.214 CP	0.050 ES	0.215 CP	0.255	0.265																		
1.52 ES	5.44 CP	1.27 ES	5.46 CP	6.48	6.73																		
GAGE SERIES DATA See Gage Series data sheet for complete specifications.																							
<table border="1"> <thead> <tr> <th>Series</th> <th>Description</th> <th>Strain Range</th> <th>Temperature Range</th> </tr> </thead> <tbody> <tr> <td>L2A</td> <td>Encapsulated constantan gages with preattached ribbon leads.</td> <td>±3%</td> <td>-100° to +250°F [-75° to +120°C]</td> </tr> <tr> <td>C2A</td> <td>Encapsulated constantan gages with preattached ready-to-use cables.</td> <td>±3%</td> <td>-60° to +180°F [-50° to +80°C]</td> </tr> </tbody> </table>	Series	Description	Strain Range	Temperature Range	L2A	Encapsulated constantan gages with preattached ribbon leads.	±3%	-100° to +250°F [-75° to +120°C]	C2A	Encapsulated constantan gages with preattached ready-to-use cables.	±3%	-60° to +180°F [-50° to +80°C]											
Series	Description	Strain Range	Temperature Range																				
L2A	Encapsulated constantan gages with preattached ribbon leads.	±3%	-100° to +250°F [-75° to +120°C]																				
C2A	Encapsulated constantan gages with preattached ready-to-use cables.	±3%	-60° to +180°F [-50° to +80°C]																				
 Example of an L2A Construction		 Example of a C2A Construction																					

Note 1: Insert desired S-T-C number in spaces marked XX.

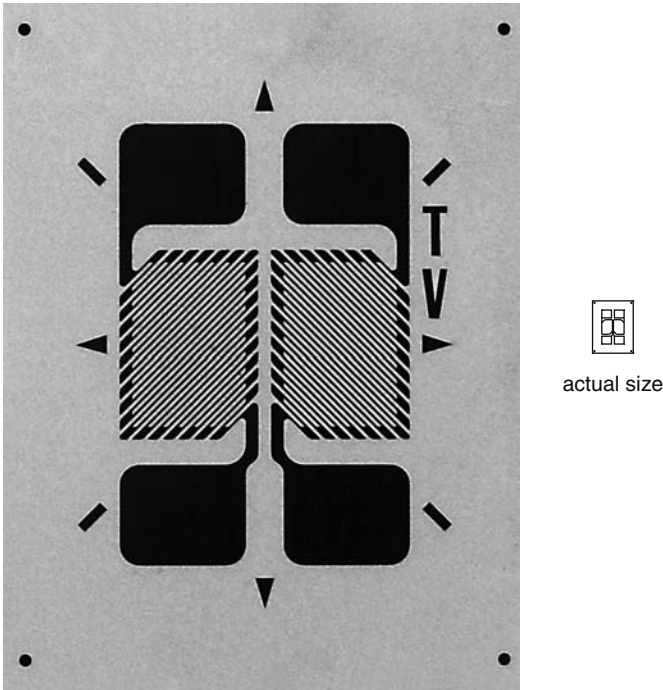
General Purpose Strain Gages - Shear/Torque Pattern

GAGE PATTERN DATA					
  actual size			GAGE DESIGNATION See Note 1, 3	RESISTANCE (OHMS) See Note 2	OPTIONS AVAILABLE See Note 3
			EA-XX-062TH-120 SA-XX-062TH-120 SK-XX-062TH-350	120 ± 0.2% 120 ± 0.4% 350 ± 0.4%	E, L, LE
DESCRIPTION Two-element 90° torque gage. Sections are electrically independent. See also 062TV and 062TW patterns.					
GAGE DIMENSIONS		Legend: ES = Each Section S = Section (S1 = Sec 1)		CP = Complete Pattern M = Matrix	
				<input type="checkbox"/> inch <input checked="" type="checkbox"/> millimeter	
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.062 ES	0.175 CP	0.055 ES	0.115 CP	0.27	0.21
1.57 ES	4.45 CP	1.40 ES	2.92 CP	6.9	5.3

GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
EA	Constantan foil in combination with a tough, flexible, polyimide backing.	±3%	-100° to +350°F (-75° to +175°C)
SA	Fully encapsulated constantan gages with solder dots.	±2%	-100° to +400°F (-75° to +205°C)
SK	Fully encapsulated K-alloy gages with solder dots.	±1.5%	-452° to +450°F (-269° to +230°C)

- Note 1:** Insert desired S-T-C number in spaces marked XX.
- Note 2:** Tolerance is increased when Option W, E, SE, LE, or P is specified.
- Note 3:** Products with designations and options shown in bold are not RoHS compliant.

General Purpose Strain Gages - Shear/Torque Pattern

GAGE PATTERN DATA					
 <p>actual size</p>			GAGE DESIGNATION See Note 1, 3	RESISTANCE (OHMS) See Note 2	OPTIONS AVAILABLE See Note 3
			EA-XX-062TV-350 SA-XX-062TV-350 SK-XX-062TV-500	350 ± 0.2% 350 ± 0.4% 500 ± 0.4%	E, L, LE
DESCRIPTION Two-element 90° torque gage.					
GAGE DIMENSIONS					
			Legend: ES = Each Section S = Section (S1 = Sec 1)	CP = Complete Pattern M = Matrix	<input type="checkbox"/> inch <input checked="" type="checkbox"/> millimeter
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.062 ES	0.175 CP	0.055 ES	0.115 CP	0.27	0.21
1.57 ES	4.45 CP	1.40 ES	2.92 CP	6.9	5.3

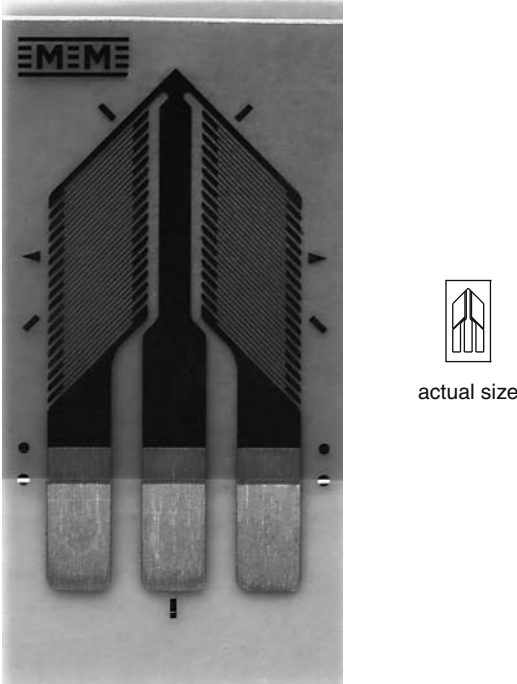
GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
EA	Constantan foil in combination with a tough, flexible, polyimide backing.	±3%	-100° to +350°F [-75° to +175°C]
SA	Fully encapsulated constantan gages with solder dots.	±2%	-100° to +400°F [-75° to +205°C]
SK	Fully encapsulated K-alloy gages with solder dots.	±1.5%	-452° to +450°F [-269° to +230°C]

Note 1: Insert desired S-T-C number in spaces marked XX.

Note 2: Tolerance is increased when Option W, E, SE, LE, or P is specified.

Note 3: Products with designations and options shown in bold are not RoHS compliant.

General Purpose Strain Gages - Shear/Torque Pattern

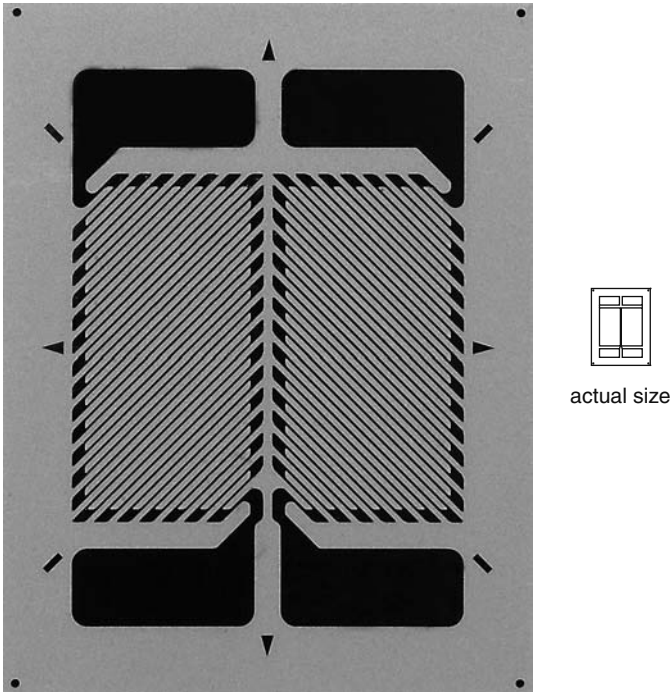
GAGE PATTERN DATA					
			GAGE DESIGNATION See Note 1	RESISTANCE (OHMS)	OPTIONS AVAILABLE See Note 2
			CEA-XX-062UV-350 CEA-XX-062UV-500	350 ± 0.4% 500 ± 0.4%	P2
DESCRIPTION Two-element 90° rosette for torque and shear-strain measurement. Sections have a common electrical connection. Exposed solder tab area is 0.04 x 0.07 in [1.0 x 1.8 mm].					
GAGE DIMENSIONS		Legend: ES = Each Section S = Section (S1 = Sec 1)		CP = Complete Pattern M = Matrix	
	inch				
	millimeter				
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.062 ES	0.330 CP	0.063 ES	0.160 CP	0.42	0.23
1.57 ES	8.38 CP	1.60 ES	4.06 CP	10.7	5.8

GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
CEA	Universal general-purpose strain gages.	±3%	-100° to +350°F [-75° to +175°C]

Note 1: Insert desired S-T-C number in spaces marked XX.

Note 2: Products with designations and options shown in bold are not RoHS compliant.

General Purpose Strain Gages - Shear/Torque Pattern

GAGE PATTERN DATA						
 <p>actual size</p>			GAGE DESIGNATION See Note 1, 3	RESISTANCE (OHMS) See Note 2	OPTIONS AVAILABLE See Note 3	
			EA-XX-125TK-350 WA-XX-125TK-350 WK-XX-125TK-10C SA-XX-125TK-350 SK-XX-125TK-10C	350 ± 0.2% 350 ± 0.4% 1000 ± 0.4% 350 ± 0.4% 1000 ± 0.4%	E, L, LE	
DESCRIPTION High-resistance two-element 90° torque gage. Similar to 125TL pattern except sections are electrically independent. See also 125TH pattern.						
GAGE DIMENSIONS						
			Legend: ES = Each Section S = Section (S1 = Sec 1)	CP = Complete Pattern M = Matrix	<input type="checkbox"/> inch <input checked="" type="checkbox"/> millimeter	
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width	
0.125 ES	0.320 CP	0.110 ES	0.225 CP	0.40	0.31	
3.18 ES	8.13 CP	2.79 ES	5.72 CP	10.2	7.9	

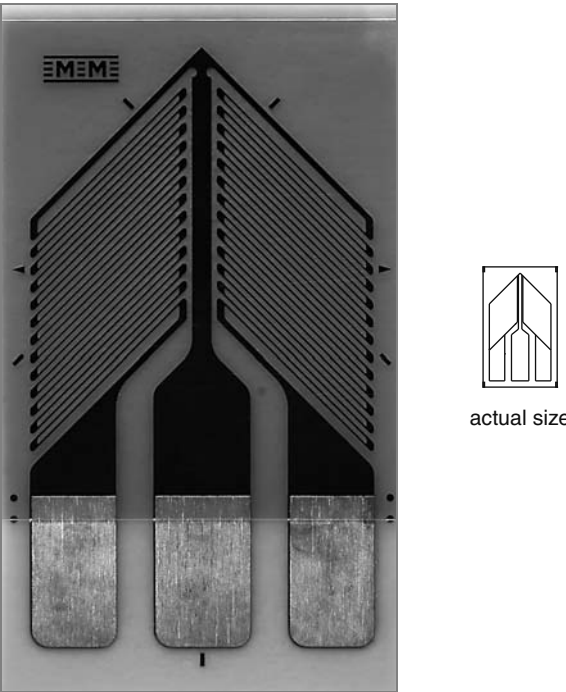
GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
EA	Constantan foil in combination with a tough, flexible, polyimide backing.	±5%	-100° to +350°F [-75° to +175°C]
WA	Fully encapsulated constantan gages with high-endurance leadwires.	±2%	-100° to +400°F [-75° to +205°C]
WK	Fully encapsulated K-alloy gages with high-endurance leadwires.	±1.5%	-452° to +550°F [-269° to +290°C]
SA	Fully encapsulated constantan gages with solder dots.	±2%	-100° to +400°F [-75° to +205°C]
SK	Fully encapsulated K-alloy gages with solder dots.	±1.5%	-452° to +450°F [-269° to +230°C]

Note 1: Insert desired S-T-C number in spaces marked XX.

Note 2: Tolerance is increased when Option W, E, SE, LE, or P is specified.

Note 3: Products with designations and options shown in bold are not RoHS compliant.

General Purpose Strain Gages - Shear/Torque Pattern

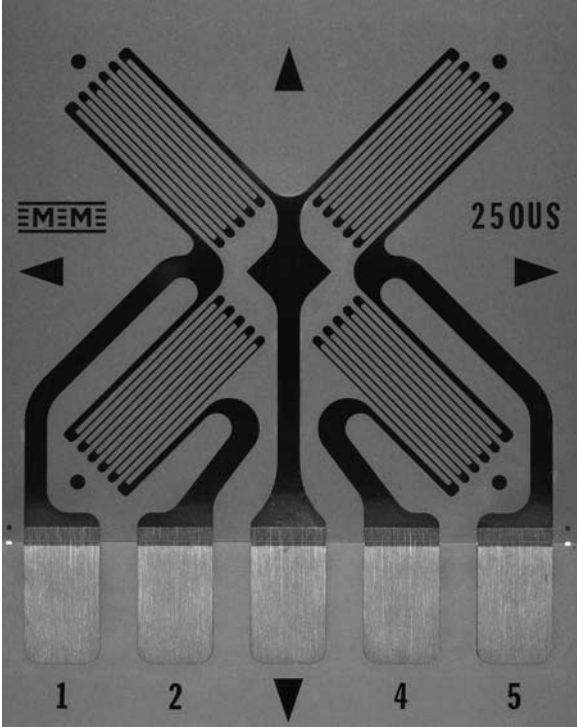

GAGE PATTERN DATA					
			GAGE DESIGNATION See Note 1	RESISTANCE (OHMS)	OPTIONS AVAILABLE See Note 2
			CEA-XX-187UV-120 CEA-XX-187UV-350	120 ± 0.4% 350 ± 0.4%	P2 P2
DESCRIPTION Two-element 90° rosette for torque and shear-strain measurement. Sections have a common electrical connection. Exposed solder tab area is 0.13 x 0.08 in [3.3 x 2.0 mm].					
GAGE DIMENSIONS		Legend: ES = Each Section S = Section (S1 = Sec 1)		CP = Complete Pattern M = Matrix	
				<input type="checkbox"/> inch <input checked="" type="checkbox"/> millimeter	
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.187 ES	0.560 CP	0.150 ES	0.320 CP	0.63	0.39
4.75 ES	14.22 CP	3.81 ES	8.13 CP	15.9	9.8

GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
CEA	Universal general-purpose strain gages.	±5%	-100° to +350°F [-75° to +175°C]

Note 1: Insert desired S-T-C number in spaces marked XX.

Note 2: Products with designations and options shown in bold are not RoHS compliant.













General Purpose Strain Gages - Shear/Torque Pattern

GAGE PATTERN DATA																							
				<p>GAGE DESIGNATION</p> <p>See Note 1</p>		<p>RESISTANCE (OHMS)</p>	<p>OPTIONS AVAILABLE</p> <p>See Note 2</p>																
				<p>CEA-XX-250US-120 CEA-XX-250US-350</p>		<p>120 ± 0.4% 350 ± 0.4%</p>																	
 <p>actual size</p>				<p>DESCRIPTION</p> <p>Four-element full-bridge pattern for shear-strain measurement. Grids are spaced 90° apart, and 45° from pattern centerlines. Exposed solder tab area is 0.16 x 0.10 in (4.1 x 2.5 mm).</p>																			
<p>GAGE DIMENSIONS</p> <p>Legend: ES = Each Section S = Section (S1 = Sec 1)</p>																							
<p>CP = Complete Pattern M = Matrix</p>																							
<table border="1"> <thead> <tr> <th>Gage Length</th> <th>Overall Length</th> <th>Grid Width</th> <th>Overall Width</th> <th>Matrix Length</th> <th>Matrix Width</th> </tr> </thead> <tbody> <tr> <td>0.250 ES</td> <td>0.820 CP</td> <td>0.120 ES</td> <td>0.700 CP</td> <td>0.96</td> <td>0.80</td> </tr> <tr> <td>6.35 ES</td> <td>20.83 CP</td> <td>3.05 ES</td> <td>17.78 CP</td> <td>24.4</td> <td>20.3</td> </tr> </tbody> </table>						Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width	0.250 ES	0.820 CP	0.120 ES	0.700 CP	0.96	0.80	6.35 ES	20.83 CP	3.05 ES	17.78 CP	24.4	20.3
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width																		
0.250 ES	0.820 CP	0.120 ES	0.700 CP	0.96	0.80																		
6.35 ES	20.83 CP	3.05 ES	17.78 CP	24.4	20.3																		
<p>GAGE SERIES DATA See Gage Series data sheet for complete specifications.</p> <table border="1"> <thead> <tr> <th>Series</th> <th>Description</th> <th>Strain Range</th> <th>Temperature Range</th> </tr> </thead> <tbody> <tr> <td>CEA</td> <td>Universal general-purpose strain gages.</td> <td>±5%</td> <td>-100° to +350°F (-75° to +175°C)</td> </tr> </tbody> </table>						Series	Description	Strain Range	Temperature Range	CEA	Universal general-purpose strain gages.	±5%	-100° to +350°F (-75° to +175°C)										
Series	Description	Strain Range	Temperature Range																				
CEA	Universal general-purpose strain gages.	±5%	-100° to +350°F (-75° to +175°C)																				

Note 1: Insert desired S-T-C number in spaces marked XX.

Note 2: Products with designations and options shown in bold are not RoHS compliant.





General Purpose Strain Gages

GAGE PATTERN	GAGE SERIES See Note 1	GAGE RESISTANCE (ohms)	GAGE LENGTH	
			inches	millimeters
062DW   actual size	EA, ED, WA , WK , SA , SK , SD , WD	120, 350	0.062	1.57
	45° torque gage. Matrix size: 0.30L x 0.15W in. (7.6L x 3.8W mm)			
062TW   actual size	EA, WK , SA , SK	120, 350	0.062	1.52
	Two-element 90° torque gage. Matrix size: 0.27L x 0.21W in. (6.9L x 5.3W mm)			
090DW   actual size	EA, WA , WK , SA , SK	120, 350	0.09	2.29
	45° torque gage. Larger version of 062DW pattern. See also 090DY pattern. Matrix size: 0.38L x 0.19W in. (9.6L x 4.8W mm)			
090DY   actual size	EA, WA , WK , SA , SK	120, 350	0.09	2.29
	45° torque gage. Similar to the 090DW pattern except opposite grid angle. Matrix size: 0.38L x 0.19W in. (9.7L x 4.8W mm)			
125TH   actual size	EA, WA , WK , SA , SK	120, 350	0.125	3.18
	Two-element 90° torque gage. Sections are electrically independent. Matrix size: 0.44L x 0.31W in. (11.2L x 7.9W mm)			
125TR   actual size	EA, EK, S2K , WA , WK , SA , SK	120, 350, 1000	0.125	3.18
	Two-element 90° torque rosette. EK-Series gages are supplied with duplex copper dots (DD) when optional feature W or SE is not specified. Matrix size: 0.36L x 0.47W in. (9.1L x 11.9W mm)			

Note 1: Products with designations and options shown in bold are not RoHS compliant.

See www.vishay.com/strain-gages for complete specifications.

General Purpose Strain Gages

GAGE PATTERN	GAGE SERIES See Note 1	GAGE RESISTANCE (ohms)	GAGE LENGTH	
			inches	millimeters
250TK   <p>actual size</p>	EA, WA, WK, SA, SK	120, 350, 1000	0.25	6.35
250TR   <p>actual size</p>	EA, EK, S2K, WA, WK, SA, SK	120, 350, 1000	0.25	6.35

Note 1: Products with designations and options shown in bold are not RoHS compliant.

See www.vishay.com/strain-gages for complete specifications.









SR-4[®] Strain Gages

FAE (Constantan Foil, Polyimide Carrier) Series Strain Gages

The complete range of BLH SR-4[®] strain gages and installation accessories are now a part of the extensive line of measurement products. And, while many similar Micro-Measurements strain gages and installation accessories are also available, our customers will continue to have the option of purchasing those BLH SR-4 products with which they are already familiar, whenever possible.

A representative listing of the most popular BLH SR-4 general-purpose strain gages are shown here. For availability of other BLH SR-4 strain gages in other patterns and series - including those for transducer applications - please contact the Customer Service Department at Micro-Measurements.

GAGE PATTERN	 RoHS COMPLIANT	DESIGNATION	DIMENSIONS — inches [millimeters]					MATRIX	
			RES. IN OHMS	GRID LENGTH	OVERALL LENGTH	GRID WIDTH	Length	Width	
		FAE-25-12SX	120 ± 0.2	0.250 [6.35]	0.350 [8.89]	0.125 [3.18]	0.548 [13.92]	0.250 [6.35]	
		FAE-25-35SX	350 ± 0.5	0.250 [6.35]	0.350 [8.89]	0.125 [3.18]	0.548 [13.92]	0.250 [6.35]	
		FAE-25-100SX	1000 ± 0.2	0.235 [5.97]	0.425 [10.79]	0.175 [4.44]	0.710 [18.03]	0.465 [11.81]	
		FAE-12-12SX	120 ± 0.2	0.125 [3.18]	0.180 [4.57]	0.065 [1.65]	0.354 [8.99]	0.175 [4.45]	
		FAE-12-35SX	350 ± 0.5	0.125 [3.18]	0.180 [4.57]	0.062 [1.57]	0.359 [9.12]	0.180 [4.57]	
		FAE-12-100SX	1000 ± 0.2	0.125 [3.18]	0.185 [4.70]	0.062 [1.57]	0.364 [9.25]	0.185 [4.70]	
Half-Square Grid - General Purpose									
		FAE-12S-12SX	120 ± 0.2	0.122 [3.10]	0.190 [4.38]	0.125 [3.18]	0.364 [9.25]	0.240 [6.10]	
		FAE-12S-35SX	350 ± 0.5	0.122 [3.10]	0.190 [4.38]	0.125 [3.18]	0.375 [9.53]	0.240 [6.10]	
		FAE-06S-12SX	120 ± 0.2	0.062 [1.57]	0.130 [3.30]	0.062 [1.57]	0.308 [7.82]	0.180 [4.57]	
		FAE-06S-35SX	350 ± 0.5	0.062 [1.57]	0.130 [3.30]	0.062 [1.57]	0.308 [7.82]	0.180 [4.57]	
Square Grid - High Power Dissipation									
		FAE-03W-12SX	120 ± 0.2	0.031 [0.79]	0.075 [1.90]	0.062 [1.57]	0.269 [6.83]	0.140 [3.56]	
		FAE-03W-35SX	350 ± 0.5	0.031 [0.79]	0.075 [1.90]	0.062 [1.57]	0.269 [6.83]	0.152 [3.86]	
Wide Grid - General Purpose, Low Profile									
		FAET-12A-12SX	120 ± 0.2	0.125 [3.18]	0.245 [6.22]	0.125 [3.18]	0.475 [12.07]	0.460 [11.68]	
		FAET-12A-35SX	350 ± 0.5	0.125 [3.18]	0.245 [6.22]	0.125 [3.18]	0.475 [12.07]	0.460 [11.68]	
Tee-Rosette - General Purpose									
		FAER-25B-12SX	120 ± 0.2	0.250 [6.35]	0.380 [9.65]	0.125 [3.18]	0.604 [15.34]	0.935 [23.75]	
		FAER-25B-35SX	350 ± 0.5	0.250 [6.35]	0.385 [9.78]	0.125 [3.18]	0.600 [15.24]	0.935 [23.75]	
		FAER-12B-12SX	120 ± 0.2	0.125 [3.18]	0.190 [4.77]	0.062 [1.57]	0.350 [8.89]	0.485 [12.32]	
		FAER-12B-35SX	350 ± 0.5	0.125 [3.18]	0.190 [4.77]	0.062 [1.57]	0.355 [9.02]	0.500 [12.70]	
3 Element Rosette - 45° Planar									



Special Use Sensors

Patterns

Residual Stress Patterns.....	116
Magnetic Field Patterns.....	117
Standard Weldable Patterns	118
Sealed Weldable Patterns.....	120
High-Temperature Weldable Patterns	122
High-Temperature Patterns.....	124
Shear Modulus Testing Patterns	128
Concrete Embedment Gages.....	129

Sensors

Temperature Sensors and LST Networks	130
Manganin Patterns	133
Crack Detection Patterns	135
Crack Propagation Patterns	137
Linear Displacement Sensor	139
Cable-Extension Displacement Sensor	141

Special Use Sensors - Residual Stress Strain Gages

The most widely used practical technique for determining residual stresses is the hole-drilling strain gage method described in ASTM Standard E837. With this method, a specially configured strain gage rosette is bonded to the surface of the test object; and a small, shallow hole is introduced into the structure, through the center of the gage, with a precision drilling apparatus. Strains in the immediate vicinity of the hole are measured, and the relaxed residual stresses are computed from these measurements. The general theory of making residual stress measurements is covered in Micro-Measurements Tech Note TN-503, Measurement of Residual Stresses by the Hole-Drilling Strain Gage Method and the requisite hardware is described in Datasheet 11304.

CONSTRUCTION

All gages are constructed of self-temperature-compensated foil (06 and 13 S-T-C) on a flexible polyimide carrier, and incorporate a centering target for use with a precision milling guide. EA-Series (A-Alloy) gages are available "open-faced" or with solder dots and encapsulation (Option SE); CEA-Series (A-Alloy) gages have encapsulated grids, and rugged, copper-coated solder tabs. Construction of the N2K Series (K-alloy) is similar to the N2A Series and includes copper pads (DP) on the solder tabs. The 062UM gage permits installation adjacent to weldments and intersecting surfaces.

GAGE PATTERN AND DESIGNATION Insert Desired S-T-C No. in Spaces Marked XX. See Note 1		RES. IN OHMS	DIMENSIONS					
			GAGE LENGTH	GRID CTR'LINE DIA.	TYPICAL HOLE DIA.		MATRIX	
					Min.	Max	Length	Width
EA-XX-031RE-120 EA-XX-031RE-120/SE		120 ± 0.2% 120 ± 0.4%	0.031	0.101	0.03	0.04	0.29	0.29
			0.79	2.56	0.8	1.0	7.4	7.04
		Due to small pattern size, measurement error can be magnified by slight mislocation of drill hole. Pattern not recommended for general-purpose applications.						
N2K-XX-030RR-350/DP		350 ± 0.4%	0.30	0.170	0.090	0.100	0.37	0.37
			0.76	4.32	2.3	2.5	9.4	9.4
		Special six-element configuration that provides somewhat higher output than three-element designs.						
EA-XX-062RE-120 EA-XX-062RE-120/SE		120 ± 0.2% 120 ± 0.4%	0.062	0.202	0.06	0.08	0.42	0.42
			1.57	5.13	1.5	2.0	10.7	10.7
		Most widely used RE pattern for general-purpose residual stress measurement applications.						
EA-XX-125RE-120 EA-XX-125RE-120/SE		120 ± 0.2% 120 ± 0.4%	0.125	0.404	0.12	0.16	0.78	0.78
			3.18	10.26	3.0	4.1	19.8	19.8
		Larger version of the 062RE pattern.						
CEA-XX-062UL-120		120 ± 0.4%	0.062	0.202	0.06	0.08	0.50	0.62
			1.57	5.13	1.5	2.0	12.7	15.7
		Fully encapsulated with large copper-coated soldering tabs. Same pattern geometry as 062RE pattern.						
CEA-XX-062UM-120		120 ± 0.4%	0.062	0.202	0.06	0.08	0.38	0.48
			1.57	5.13	1.5	2.0	9.6	12.2
		Fully encapsulated with large copper-coated soldering tabs and special trim alignment marks. Trim line spaced 0.068 in [1.73 mm] from hole center. Limitations may exist in data reduction equations.						

Note 1: Products with designations and options shown in bold are not RoHS compliant.

Special Use Sensors - Magnetic Field Strain Gages

Intense, time-varying electromagnetic fields with steep gradients in field strength can cause troublesome noise in strain gage circuits. In severe magnetic environments, with low signal levels, the noise amplitude may be several times larger than the strain signal from the gage. Micro-Measurements H-Series noninductive strain gages have been specially designed to minimize noise pickup in the gage grid due to electromagnetic fields.

H-Series strain gages consist of two identical grids, with one stacked directly above and insulated from, the other. The upper and lower grid elements are connected in series so that current flows in opposite directions through the two grids. With this arrangement, noise voltages induced in the grid tend to be self-cancelling. The counter-current principle employed in H-Series gages is particularly effective against magnetic field gradients parallel to the test surface.

H-Series strain gages have been used very successfully in fusion research applications and similar environments with flux densities to 50 000 gauss.

CONSTRUCTION

H-Series strain gages are constructed with two 350-ohm constantan alloy foil grids on a glass-fiber-reinforced epoxy



phenolic carrier. These fully encapsulated gages include closely spaced, heavy copper terminals for direct leadwire attachment. H-Series gages are available in both a single-axis and a delta (60°) rosette pattern. The available S-T-C number is 06.

ADHESIVES

Micro-Measurements M-Bond 600 or AE-15 adhesive systems are particularly recommended; M-Bond 600 produces the thinnest glue line. Adhesive cure temperature should not exceed the maximum sensor operating temperature of +250°F [+120°C].

LEADWIRES

In many cases, the leadwire system itself is the principal source of magnetic noise induction in the measuring circuit. Careful attention to details as outlined in Micro-Measurements Tech Note TN-501, Noise Control in Strain Gage Measurements, is strongly recommended.

GAGE PATTERN AND DESIGNATION Insert Desired S-T-C No. in Spaces Marked XX.		RES. IN OHMS	DIMENSIONS					
			GAGE LENGTH	OVERALL LENGTH	GRID WIDTH	OVERALL WIDTH	MATRIX	
							Length	Width
H06A-AC1-125-700		700 ± 0.5%	0.125	0.49	0.125	0.125	0.61	0.22
			3.18	12.4	3.18	3.18	15.5	5.6
			Single-axis pattern with integral copper terminals.					
H06A-AD3-125-700		700 ± 0.5%	0.125 ES	0.56	0.080 ES	0.620	0.65	0.70
			3.18 ES	14.2	2.03 ES	15.75	16.5	17.8
			Three-element 60° delta rosette with integral copper terminals.					

Where magnetic noise is likely to be encountered, the selection of the strain gage grid alloy should be given careful consideration. If the grid alloy is magnetic, it will be subject to extraneous physical forces in a magnetic field; and, if magnetoresistive, will undergo spurious resistance changes. Similarly, if the alloy is magnetostrictive, the grid will tend to change length in the magnetic field. While constantan is comparatively free from magnetic effects over its normal operating temperature range, specific measurement applications may indicate desirability of a different sensing grid alloy. Contact our Applications Engineering Department for details.

Special Use Sensors - Weldable Strain Gages

Micro-Measurements Standard Weldable Strain Gages and Temperature Sensors are specially designed for spot welding to structures and components. They are ideal for applications where test or environmental conditions preclude clamping and curing an adhesively bonded gage installation. These gages are equally advantageous when strain measurements must be made at an elevated temperature, but the nature of the test object does not permit the use of an elevated-temperature-curing adhesive.

Surface preparation requirements are minimal; only an appropriate solvent cleaning and abrasion of the test part surface with silicon-carbide paper or a small, hand-held grinder is needed. Spot welding is accomplished with a portable stored-energy hand-probe spot welder, such as the Model 700. Environmental protection is as easily applied to a welded gage installation as to an adhesively bonded gage.

Refer to Instruction Bulletin B-131 and our Strain Gage Accessories Databook for further information on installation and protective coatings, and to Datasheet 11302 for specifications on the Model 700 Welding/Soldering Unit.

DESCRIPTION AND PERFORMANCE

General — All sensors are laboratory-prebonded, with a high-performance adhesive, to thin (0.005 in [0.13 mm]) metal carriers. Sensor grids are fully encapsulated for protection against handling and installation damage. Standard weldable strain gages are offered in two series to meet differing performance requirements. Both series are available in either 06 or 09 self-temperature compensation. Strain gages with 06 S-T-C have Inconel carriers, while S-T-C 09 gages and temperature sensors are mounted on 300-series stainless steel.

CEA-Series Weldable Strain Gage — Polyimide-encapsulated constantan foil grid, with large, rugged, copper-coated tabs. In most cases, the carrier can be contoured to a radius as small as 1/2in [13mm]. The CEA

Series is ideal for direct leadwire attachment, before or after installation.

Strain range is $\pm 5000\mu\text{in/in}$ [$\pm 5000\mu\text{m/m}$], and normal operating temperature range is -100° to $+200^\circ\text{F}$ [-75° to $+95^\circ\text{C}$]. Short-term maximum temperature is $+300^\circ\text{F}$ [$+150^\circ\text{C}$].

LWK-Series Weldable Strain Gage — Nickel-chromium alloy grid, encapsulated in fiberglass-reinforced epoxy phenolic. The LWK gage is provided with a three-wire lead system with 10 in [250 mm] of Teflon[®]-insulated leadwire.

This construction simplifies leadwire temperature compensation and provides for easy connection of the lead system to the instrumentation cable. Minimum installation radius is generally limited to 2in [50 mm].

Strain range is $\pm 5000\mu\text{in/in}$ [$\pm 5000\mu\text{m/m}$], and normal operating temperature range is -320° to $+500^\circ\text{F}$ [-195° to $+260^\circ\text{C}$]. Short-term maximum temperature is $+550^\circ\text{F}$ [$+290^\circ\text{C}$].

WWT-Series Temperature Sensor — High-purity nickel foil grid encapsulated in fiberglass-reinforced epoxy-phenolic, and equipped with integral three-tab terminal to facilitate leadwire attachment. The temperature sensor is normally installed on a flat surface of the workpiece, but, in any case, should always be oriented with the gridlines in the direction of minimum strain to avoid strain-induced errors (see Micro-Measurements Tech Note TN-506, Bondable Resistance Temperature Sensors and Associated Circuitry). With an appropriate LST Matching Network, the temperature response characteristic of the nickel can be linearized and scaled for direct readout (in degrees) with any strain indicator.






Teflon is a Registered Trademark of DuPont.

MEASUREMENT CONSIDERATIONS

It is important to note that operating characteristics of weldable strain gages (gage factor, transverse sensitivity, and thermal output) are specified for the basic strain gage itself — without the metal carrier. Thus, the properties are measured by bonding a conventional strain gage directly to an appropriate calibration specimen, following standard methods specified for all Micro-Measurements strain gages. This procedure assures the most accurate results, independent of the variables introduced by welding. In particular, the user should be aware that the gage factor specified on the engineering data sheet accompanying the gage applies only to the basic strain gage, without the shim. The effective gage factor of the weldable assembly (after welding to the test member) is commonly 5 to 10%

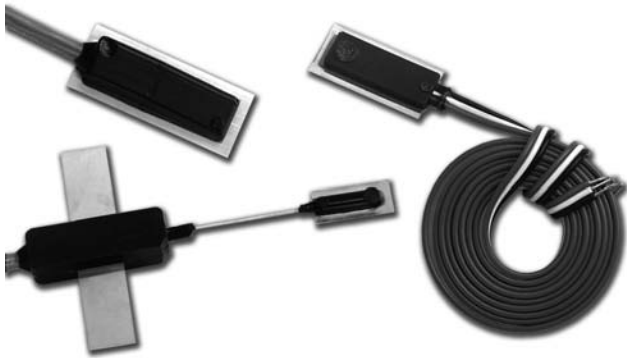
lower than this, due primarily to the stiffness of the shim. The reduction in gage factor is not subject to quantitative generalization, because it depends on the cross-sectional properties of the test specimen, and on the mode of loading (e.g., bending versus direct stress). It has been demonstrated, however, that for a group of like specimens, loaded in the same manner, the weldable gages exhibit very good repeatability and uniformity of response. Therefore, when test requirements dictate greatest accuracy, the weldable gages should be calibrated on a specimen of the same material and cross section as the test part, and under the same mode of loading.

Special Use Sensors - Weldable Strain Gages

GAGE PATTERN AND DESIGNATION Insert Desired S-T-C No. in Spaces Marked XX. See Note 1		RES. IN OHMS.	DIMENSIONS						
			CARRIER			ACTIVE GRID		MATRIX	
			Length	Width	Thick	Length	Width	Length	Width
CEA-XX-W250A-120 CEA-XX-W250A-350		120 ± 0.4% 350 ± 0.4%	0.63	0.34	0.005	0.230	0.125	0.44	0.17
			16.0	8.6	0.13	5.84	3.18	11.2	4.3
			Most flexible and conformable pattern. Type 326-DFV and 330-DFV flat three-conductor cable typically used to solder directly to copper-coated tabs.						
CEA-XX-W250C-120 CEA-XX-W250C-350		120 ± 0.4% 350 ± 0.4%	0.90	0.90	0.005	0.230	0.125	0.44	0.17
			22.9	22.9	0.13	5.84	3.18	11.2	4.3
			Tee rosette, used in biaxial stress states where directions of principal stresses are known. See W250A pattern for typical leadwire recommendations.						
LWK-XX-W250B-350		350 ± 0.4%	0.88	0.32	0.005	0.250	0.125	0.62	0.17
			22.4	8.1	0.13	6.35	3.18	15.7	4.3
			Wide-temperature-range linear pattern with 10 in [250 mm] pre-attached leads. Teflon insulation is pretreated for best bond to protective coatings.						
LWK-XX-W250D-350		350 ± 0.4%	1.15	1.15	0.005	0.250	0.125	0.62	0.17
			29.2	29.2	0.13	6.35	3.18	15.7	4.3
			Tee rosette, used in biaxial stress states where directions of principal stresses are known and a wide operating temperature range is required.						
WWT-TG-W200B-050		50 ± 0.4% @ +75°F [+24°C]	0.71	0.43	0.005	0.200	0.200	0.52	0.26
			18.0	10.9	0.13	5.08	5.08	13.1	6.6
			Easy-to-use temperature sensor that can be welded or adhesively bonded to the test structure. For standard bondable temperature sensors, see Document Number 11522, "Temperature Sensors and LST Networks."						

Note 1: Products with designations and options shown in bold are not RoHS compliant.

Special Use Strain Gages - Weldable Strain Gages



Micro-Measurements Sealed Weldable Strain Gages are specially designed for spot welding to structures and components. They are ideally used for applications where test or environmental conditions preclude clamping and curing an adhesively bonded gage installation. These gages

are equally advantageous when strain measurements must be made at elevated temperatures, but the nature of the test object does not permit the use of an elevated-temperature-curing adhesive. Additionally, all Micro-Measurements Sealed Weldable Strain Gages come with a preinstalled protective coating providing both protection in moist environments and savings in the time and effort required for making the complete gage installation.

All sensors are fabricated with EA-Series strain gages, laboratory-prebonded with a high-performance adhesive to a thin [0.005 in (0.127 mm)] stainless steel carrier, and fully encapsulated for protection against moisture. They have a ± 5000 microinch/in strain range, and a normal operating temperature range of -40°F (-40°C) to $+180^{\circ}\text{F}$ ($+83^{\circ}\text{C}$). These gages can be used on surfaces with a radius of curvature of 3.0 in (76 mm) or greater.

The three leadwire-series of Micro-Measurements Sealed Weldable Strain Gages have physical constructions designed for various environmental exposures and installation constraints.

R-LEADWIRE-SERIES

These gages are designed for long-term out-of-doors use. Primarily used in applications such as railroad and civil structures, they can be exposed to oil and water splash and short-term submersion in water of shallow [24 in (60 cm)] depth. The metal carrier is processed to give good first cycle data, excellent fatigue resistance and a high strain range.

Exposure of the vinyl-insulated cable to strong solvents - especially MEK - should be avoided to prevent damage. Long-term exposure to sub-freezing temperatures requires careful handling to avoid cracking of the vinyl insulation.


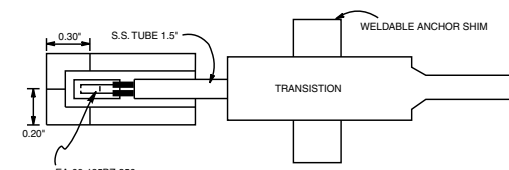

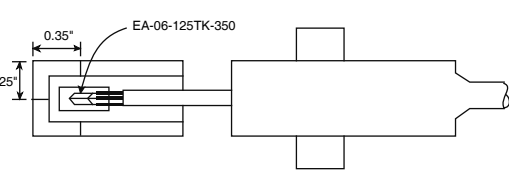
DESIGNATION	NOMINAL RESISTANCE (Ohms)	NOMINAL GAGE FACTOR	GRID GEOMETRY	GAGE LENGTH (in)	LEADWIRE	SHIM LENGTH (in)	SHIM WIDTH (in)
LEA-06-W125E-350/3R	350	2.0	Axial	0.125	Vinyl	0.8	0.4
<p>Bridge Circuit</p>		<p>EA-06-125BZ-350 Configuration</p>					
LEA-06-W125F-350/3R	350	2.0	Shear	0.125	Vinyl	1.0	0.5
<p>Bridge Circuit</p>		<p>EA-06-125TK-350 Configuration</p>					

Special Use Strain Gages - Weldable Strain Gages

T-LEADWIRE-SERIES

This series is designed to withstand exposure to water pressures of up to 500 psi. They can also withstand short-term (up to 14 days) immersion in crude oil. A flexible stainless steel tube, providing wire routing from the strain gage to a cable transition, enables fine positioning of the


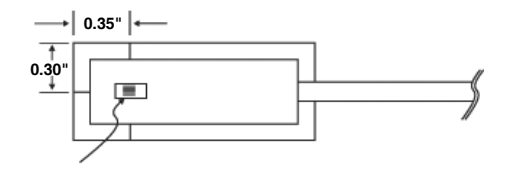

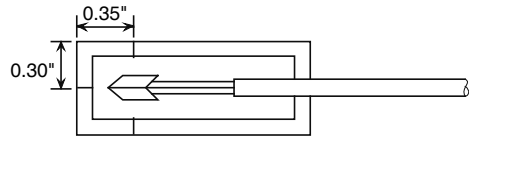
sensor as well as providing strain relief. These sensors are typically used on larger civil structures, including bridges, dams, and buildings, or for exposures of up to a year in seawater.

DESIGNATION	NOMINAL RESISTANCE (Ohms)	NOMINAL GAGE FACTOR	GRID GEOMETRY	GAGE LENGTH (in)	LEADWIRE	SHIM LENGTH (in)	SHIM WIDTH (in)
LEA-06-W125E-350/10T	350	2.0	Axial	0.125	Shielded Vinyl	0.8	0.4
 <p>Bridge Circuit</p>		 <p>Configuration</p>					
LEA-06-W125F-350/10T	350	2.0	Shear	0.125	Shielded Vinyl	1.0	0.5
 <p>Bridge Circuit</p>		 <p>Configuration</p>					

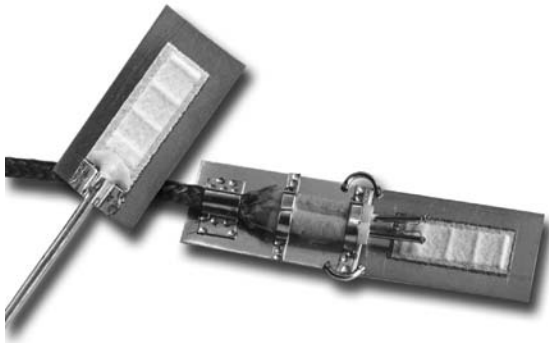
L-LEADWIRE-SERIES

The L-Leadwire-Series sensors are designed to have a performance similar to the T-Leadwire-Series but without a cable transition. They can be used in similar applications when the sensor will be exposed to smaller strains, and care

can be taken during installation to anchor the leadwire to provide for strain relief. The L-Leadwire-Series gages are particularly useful where space constraints preclude the use of the cable transition of T-Leadwire-Series gages.

DESIGNATION	NOMINAL RESISTANCE (Ohms)	NOMINAL GAGE FACTOR	GRID GEOMETRY	GAGE LENGTH (in)	LEADWIRE	SHIM LENGTH (in)	SHIM WIDTH (in)
LEA-06-W125E-350/10L	350	2.0	Axial	0.125	Shielded Vinyl	1.5	0.6
 <p>Bridge Circuit</p>		 <p>Configuration</p>					
LEA-06-W125F-350/10L	350	2.0	Shear	0.125	Shielded Vinyl	1.5	0.6
 <p>Bridge Circuit</p>		 <p>Configuration</p>					

Special Use Strain Gages - Weldable Strain Gages



Micro-Measurements high-temperature weldable strain gages are free-filament wire strain gages pre-bonded to shim stock using flame sprayed alumina. The gages can be welded to the test structure using a capacitive discharge spot welder (such as Micro-Measurements Model 700), permitting easy installation in the field, especially on large structures. High-temperature weldable strain gages are excellent in applications where protection against moisture is not required. The fatigue resistance of this bonded wire strain gage makes it the best choice for dynamic, impact or

FEATURES

- High temperature installations using simple attachment techniques
- Ceramic bonded wire gage performance in a weldable gage
- Superior performance of bonded gages
- Improved fatigue life for dynamic applications

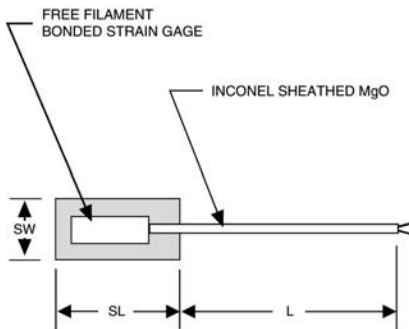


RoHS
COMPLIANT

vibratory strain measurements to 1800°F [980°C]. Their use in measuring static strains should be avoided.

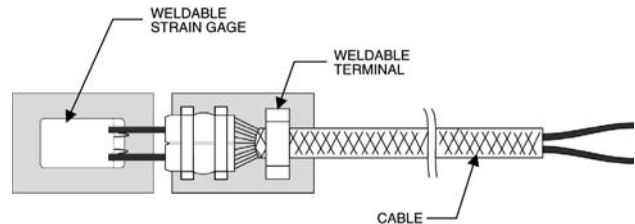
High-temperature weldable strain gages are available with grids of Nichrome V or Pt8W alloys. They can be ordered with either of two types of preattached high-temperature insulated cable.

GAGES WITH M-SERIES LEADWIRES



Complete assembly consists of a free-filament gage bonded to a shim with an integral high-temperature cable with chromel/alumel wires. The mineral insulated, two-conductor cable with an Inconel metal jacket is rated to 1800°F [980°C] and offers excellent protection in harsh environments. While the ends are sealed to avoid moisture absorption during shipping or storage, care should be taken when using M-Series cables to ensure that the mineral insulation does not absorb moisture during handling and application.

GAGES WITH F-SERIES LEADWIRES



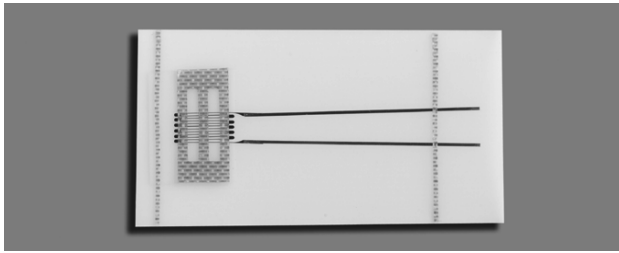
Complete assembly consists of a free-filament gage bonded to a shim, a weldable transition terminal and a high temperature cable with chromel/alumel wire. A fiberglass-insulated braided, two-conductor cable assembly is attached at the gage end through alumina insulators strap-welded to the terminal shim, providing a firm anchor for the cable at the gage end. The cable conductors are threaded through lengthwise holes in the alumina insulators and bonded to the insulators with high strength ceramic cement to prevent wire movement at the gage - cable weld junction. The fiberglass cable is rated to 1200°F [650°C] and is used where fraying due to vibration is not a concern. F-Series cables are more flexible than M-Series cables.

Special Use Strain Gages - Weldable Strain Gages

DESIGNATION	NOMINAL RESISTANCE IN OHMS	NOMINAL GAGE FACTOR	SENSOR ALLOY	SENSOR GAGE LENGTH	MAXIMUM TEMP. IN DEG. F	LEADWIRE	SHIM LENGTH S.L. (IN)	SHIM WIDTH S.W. (IN)	LEAD TERMINAL
LZN-NC-W250G-120/2F	120	2.0	NiChrome V	1/4"	1200°F	Chromel-Alumel	0.50	0.30	Yes
LZN-NC-W250G-120/2M	120	2.0	NiChrome V	1/4"	1600°F	Chromel-Alumel	0.50	0.30	None
LZE-NC-W250G-120/2F	120	4.0	Pt8W	1/4"	1200°F	Chromel-Alumel	0.50	0.30	Yes
LZE-NC-W250G-120/2M	120	4.0	Pt8W	1/4"	1800°F	Chromel-Alumel	0.50	0.30	None

Note: The standard leadwire length is indicated, in feet, by the number to the left of the last letter of the gage designation. For example, /2F indicates 2 feet of fiberglass insulated leadwire. Gages with longer leadwires (up to 50 feet) are available on special order.

Special Use Strain Gages - High-Temperature Strain Gages



FEATURES

- Measurement range to 2100 °F (1150 °C)
- Free-filament Kanthal alloy grids for bonding with ceramic adhesives.
- Linear and Tee-rosette patterns



RoHS
COMPLIANT

ZC-Series strain gages are etched Kanthal (Fe-Cr-Al alloy) foil grids in free-filament form for high-temperature applications. They are bonded with either ceramic adhesives, or by the use of flame spray or Rokide® processes.

ZC-Series strain gages cannot be self-temperature compensated, and a dummy compensating gage must be used for minimizing of thermally induced apparent strain

(thermal output). Several patterns are available with built-in compensating grids.

ZC-Series strain gages are supplied with a removable high-temperature carrier for gage handling during installation. All patterns have 1 in (25.4 mm) Nichrome ribbon leads spot welded to the gage tabs for leadwire attachment.


GAGE PATTERN	GAGE DESIGNATION	RES. IN OHMS	OPTIONS AVAILABLE
Not shown actual size. Enlarged when necessary for definition.			
<div style="display: flex; justify-content: center; gap: 10px;"> inch millimeter </div>			


G1262				Square linear pattern.		
GAGE LENGTH	OVERALL LENGTH	GRID WIDTH	OVERALL WIDTH			
0.062	0.150	0.076	0.076			
1.57	3.81	1.93	1.93			
MATRIX SIZE	N/A			ZC-NC-G1262-120	120	


G1263				Wide linear pattern.		
GAGE LENGTH	OVERALL LENGTH	GRID WIDTH	OVERALL WIDTH			
0.100	0.248	0.179	0.179			
2.54	6.30	4.55	4.55			
MATRIX SIZE	N/A			ZC-NC-G1263-120	120	

Special Use Strain Gages - High-Temperature Strain Gages

GAGE PATTERN		GAGE DESIGNATION	RES. IN OHMS	OPTIONS AVAILABLE
Not shown actual size. Enlarged when necessary for definition.				
		inch		
		millimeter		

G1264				Linear pattern with inactive temperature-compensating grid.		
						
GAGE LENGTH	OVERALL LENGTH	GRID WIDTH	OVERALL WIDTH			
0.100	0.310	0.179	0.430			
2.54	7.87	4.55	10.92			
MATRIX SIZE	N/A			ZC-NC-G1264-120	120	


G1265				Linear pattern.		
						
GAGE LENGTH	OVERALL LENGTH	GRID WIDTH	OVERALL WIDTH			
0.138	0.300	0.138	0.138			
3.51	7.62	3.51	3.51			
MATRIX SIZE	N/A			ZC-NC-G1265-120	120	


G1266 G1272				Linear pattern. Higher resistance linear pattern.		
						
GAGE LENGTH	OVERALL LENGTH	GRID WIDTH	OVERALL WIDTH			
0.200	0.380	0.135	0.135			
5.08	9.65	3.43	3.43			
MATRIX SIZE	N/A			ZC-NC-G1266-120 ZC-NC-G1272-350	120 350	


High-Temperature Patterns

Special Use Strain Gages - High-Temperature Strain Gages

GAGE PATTERN	GAGE DESIGNATION	RES. IN OHMS	OPTIONS AVAILABLE		
Not shown actual size. Enlarged when necessary for definition. <table border="1" style="float: right; margin-left: 20px;"> <tr> <td style="text-align: center;">inch</td> </tr> <tr> <td style="text-align: center;">millimeter</td> </tr> </table>	inch	millimeter			
inch					
millimeter					

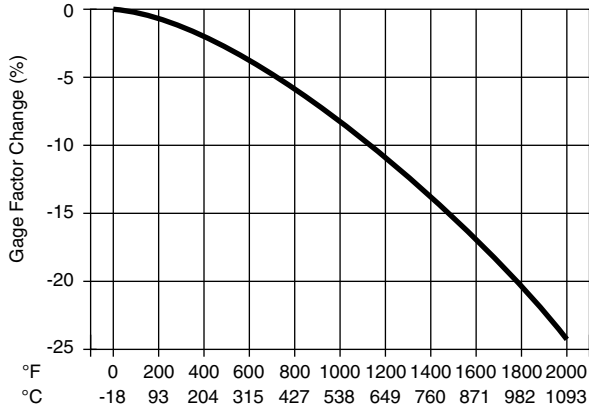
G1267				Linear pattern with inactive temperature-compensating grid.		
						
GAGE LENGTH	OVERALL LENGTH	GRID WIDTH	OVERALL WIDTH			
0.200	0.503	0.134	0.442			
5.08	12.78	3.40	11.23			
MATRIX SIZE	N/A			ZC-NC-G1267-120	120	

G1269 G1275				Tee-rosette pattern in half-bridge configuration.		
						
GAGE LENGTH	OVERALL LENGTH	GRID WIDTH	OVERALL WIDTH			
0.125	0.278	0.150	0.346			
3.18	7.06	3.81	8.79			
MATRIX SIZE	N/A			ZC-NC-G1269-200 ZC-NC-G1275-350	200 350	

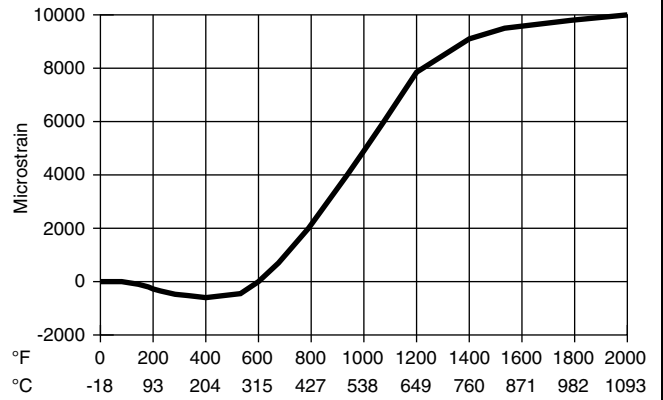
G1270				Higher resistance linear pattern.		
						
GAGE LENGTH	OVERALL LENGTH	GRID WIDTH	OVERALL WIDTH			
0.100	0.250	0.280	0.300			
2.54	6.35	7.11	7.62			
MATRIX SIZE	N/A			ZC-NC-G1270-350	350	

Special Use Strain Gages - High-Temperature Strain Gages

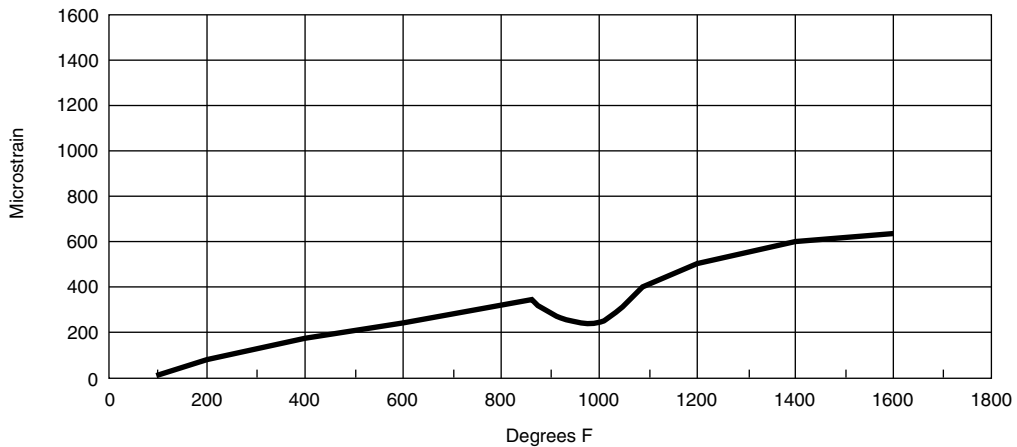
GAGE FACTOR VARIATION WITH TEMPERATURE FOR ZC-SERIES GAGE



TYPICAL APPARENT STRAIN ZC-SERIES GAGE ON TITANIUM WITH H CEMENT



APPARENT STRAIN/THERMAL OUTPUT ZC-NC-G1267-120 GAGE






Special Use Sensors - Shear Modulus Testing Strain Gages

Shear Modulus Sensors are specifically designed to accommodate the unique specimen geometries and strain-field distributions encountered when testing composite materials for shear properties. Two popular specimens for in-plane shear modulus testing of composites are the losipescu and compact designs. The test section for both types is described as the area between two opposing notches. The losipescu specimen has a distance between the notch roots of 0.45 in [11.4 mm]; for the compact design this distance is 0.75 in [19 mm]. Both of these specimens have an inherently nonuniform shear-strain distribution in their test zone. Determining shear modulus requires extracting an average shear-strain value from this nonuniform strain field. Since strain gages have the unique characteristic of integrating the surface strain field under their grids, average specimen strain is automatically obtained by spanning the entire length of either specimen's test section.

Two 500Ω ±0.4%, ±45° shear-gage configurations are available for both the losipescu and compact specimen designs. The planar configuration, with side-by-side grids, is constructed with a standard N2 backing and Option SP61

(soft, copper lead ribbons and polyimide film encapsulation). The stacked configuration is produced with a special backing, A2. This backing is similar to N2 but is fully encapsulated with a polyimide film and includes integral soft, copper lead ribbons (like those provided by Option SP61). The stacked configuration is offered to best simulate strain measurement at a point. The stacked gages are supplied in a quarter-bridge arrangement so that independent gage measurements can be made if necessary. When connected in a half-bridge circuit, the stacked construction inherently provides temperature compensation and insensitivity to normal strains. Due to the increased stiffness of a stacked sensor, compared to one having only a single layer, an evaluation of the test conditions and requirements should be made to ensure that the gage will not compromise accuracy by significantly reinforcing low-modulus and/or thin specimens.

GAGE PATTERN AND DESIGNATION Insert Desired S-T-C No. in Spaces Marked XX.		 RoHS COMPLIANT	DIMENSIONS				inch	
			GAGE LENGTH	OVERALL LENGTH	GRID WIDTH	OVERALL WIDTH	Length	Width
	N2A-XX-C032A-500/SP61 N2P-08-C032A-500/SP61	0.032	0.462	0.031	0.197	0.500	0.257	
		0.81 each section	11.73	0.79 each section	5.00	12.7	6.5	
		For use with losipescu specimens.						
	N2A-XX-C032B-500/SP61 N2P-08-C032B-500/SP61	0.032	0.762	0.031	0.197	0.800	0.257	
	0.81 each section	19.35	0.79 each section	5.00	20.3	6.5		
	For use with compact specimens.							
	A2A-XX-C085C-500 A2P-08-C085C-500	0.085	0.445	0.070	0.200	0.500	0.260	
		2.16 each section	11.30	1.78	5.08	12.7	6.6	
		For use with losipescu specimens.						
	A2A-XX-C085D-500 A2P-08-C085D-500	0.085	0.745	0.070	0.200	0.805	0.260	
	2.16 each section	18.92	1.78	5.08	20.4	6.6		
	For use with compact specimens.							

Special Use Sensors - Concrete Embedment Strain Gages




The EGP-Series Embedment Strain Gage is specially designed for measuring mechanical strains inside concrete structures. The sensing grid, constructed of a nickel-chromium alloy (similar to Karma), has an active gage length of 4 in [100 mm] for averaging strains in aggregate materials. A rugged 5 in [130 mm] outer body of proprietary polymer concrete resists mechanical damage during pouring, minimizes reinforcement of the structure, and provides protection from moisture and corrosive attack. The grid, cast within the polymer concrete to ensure maximum strain sensitivity, is self-temperature-compensated to minimize thermal output when installed in concrete structures. Each gage incorporates a heavy-duty 10 ft [3 m] cable with 22-AWG [0.643 mm dia.] leadwires; a three-wire construction to the sensing grid helps minimize temperature effects in the instrumentation leads. Special lengths of preattached cable will be quoted upon request. Micro-Measurements M-LINE accessory cable 322-DJV is available for adding cable length in the field.

Rugged and reliable, EGP-Series Strain Gages are available in both 120-ohm (EGP-5-120) and 350-ohm (EGP-5-350) resistances.

SPECIFICATIONS

- Construction. Strain sensing grid cast in a sturdy, water-resistant material.
- Sensing Grid. Nickel-chromium alloy on polyimide backing. Active gage length of 4 in [100 mm] nominal. Grid resistance of 120 or 350 ohms, $\pm 0.8\%$.
- Outer Body. Proprietary polymer concrete. 5 x 0.7 x 0.4 in [130 x 17 x 10 mm] nominal.
- Cable. Three 10 ft [3 m] leads of 22-AWG [0.643 mm dia.] stranded tinned copper in 0.015 in [0.4 mm] thick PVC insulation. Nominal cable diameter of 0.2 in [5 mm]. (Other lengths quoted upon request.)
- Temperature Range. The normal usage range is +25° to +125°F [-5° to +50°C]. Extended range is -25° to +150°F [-30° to +60°C].

EMBEDMENT GAGE SELECTION

GAGE DESIGNATION		RES. IN OHMS	DIMENSIONS					
			<table border="1" style="width: 100%; text-align: center;"> <tr> <td>inch</td> </tr> <tr> <td>millimeter</td> </tr> </table>				inch	millimeter
			inch					
millimeter								
ACTIVE GAGE LENGTH	OUTER BODY WIDTH	OUTER BODY LENGTH	OUTER BODY THICKNESS					
EGP-5-120		120 \pm 0.8%	4	0.7	5	0.4		
			100	17	130	10		
EGP-5-350		350 \pm 0.8%	4	0.7	5	0.4		
			100	17	130	10		

Special Use Sensors - Temperature

Resistance thermometry is a widely employed method of measuring temperature, and is based on using a material whose resistivity changes as a function of temperature. Resistance Temperature Detectors (RTD's) have fast response time, provide absolute temperature measurement (since no reference junctions are involved), and are very accurate. Their measurement circuits are relatively simple, and the sensors, when properly installed, are very stable over years of use.

Micro-Measurements resistance temperature sensors are constructed much like wide-temperature-range strain gages. The standard sensors utilize nickel or nickel/manganin grids, although special-purpose gages are also available in Balco® alloy or copper foil grids. These temperature sensors are bonded to structures using standard strain gage installation techniques, and can measure surface temperatures from -452° to approximately $+500^{\circ}\text{F}$ [-269° to $+260^{\circ}\text{C}$]. Because of their extremely low thermal mass and the large bonded area, the sensors follow temperature changes in the structural mounting surface with negligible time lag.

Balco is a trademark of the W.B. Driver Company

TG TEMPERATURE SENSORS

TG Temperature Sensors are normally selected for measurements from -320° to $+500^{\circ}\text{F}$ [-195° to $+260^{\circ}\text{C}$]. The sensing grid utilizes a high purity nickel. Three basic constructions are offered:

ETG Sensors have a polyimide carrier for flexibility. It is available as an encapsulated gage with exposed solder tabs (Option E), or with integral printed-circuit terminals (Option W).

The WTG Sensor incorporates integral leadwires and a high-temperature epoxy-phenolic matrix (reinforced with glass fiber) which fully encapsulates the grid.

The WWT-TG Sensor is a slightly larger version of the WTG, but preattached to a 0.005-in [0.13-mm] thick stainless steel shim. This gage can be welded or bonded to a structure.

The resistance at $+75^{\circ}\text{F}$ [$+23.9^{\circ}\text{C}$] is $50\Omega \pm 0.3\%$ for the ETG and WTG Sensors; and $50\Omega \pm 0.4\%$ for the WWT-TG Sensors.

Maximum operating temperature for ETG Sensors with Option E is $+450^{\circ}\text{F}$ [$+230^{\circ}\text{C}$], and $+350^{\circ}\text{F}$ [$+175^{\circ}\text{C}$] for Option W. All other types are $+500^{\circ}\text{F}$ [$+260^{\circ}\text{C}$].

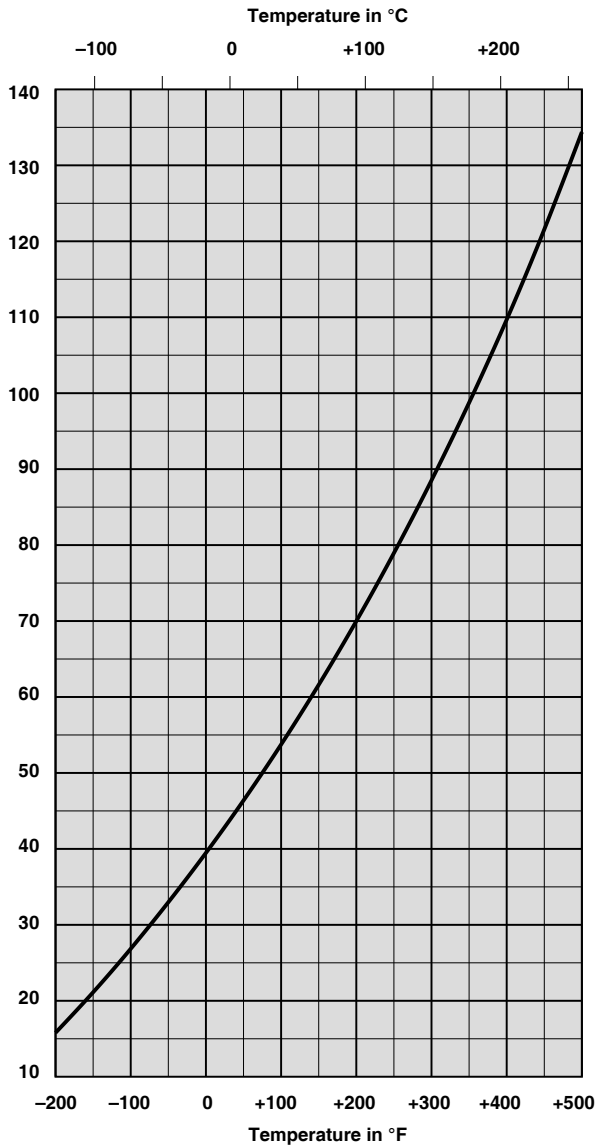
TEMPERATURE SENSOR SELECTION

GAGE PATTERN AND DESIGNATION Approximate Size Shown See Note 1	DIMENSIONS					
	GAGE LENGTH	OVERALL LENGTH	GRID WIDTH	OVERALL WIDTH	MATRIX	
					Length	Width
ETG-50A/Option E ETG-50A/Option W ETG-50B/Option E ETG-50B/Option W 	0.060	0.148	0.100	0.100	0.28	0.20
	1.52	3.76	2.54	2.54	7.0	4.8
	0.125	0.235	0.125	0.125	0.33	0.19
	3.18	5.97	3.18	3.18	8.3	4.7
WTG-50A WTG-50A/Option W WTG-50B WTG-50B/Option W 	0.060	0.148	0.100	0.100	0.28	0.20
	1.52	3.76	2.54	2.54	7.0	4.8
	0.125	0.235	0.125	0.125	0.33	0.19
	3.18	5.97	3.18	3.18	8.3	4.7
 WWT-TG-W200B-050 For weldable temperature sensor, see appropriate datasheet.	0.20	(shim length) 0.71	0.200	(shim width) 0.43	0.52	0.26
	5.08	18.03	5.08	10.92	13.1	6.6

Note 1: Products with designations and options shown in bold are not RoHS compliant.

In addition to the standard line of temperature sensors described above, Micro-Measurements can furnish almost any type of sensor pattern desired, in a wide range of resistances. Contact our Applications Engineering Department for details.

Special Use Sensors - Temperature



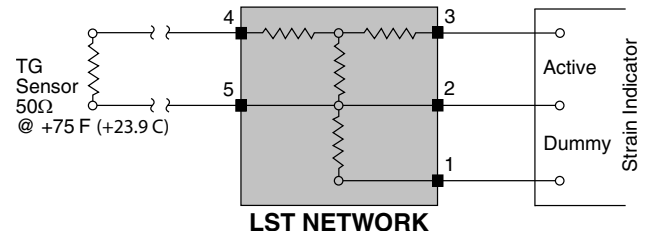
Typical data for 50 Ω nickel sensor.

TG LST MATCHING NETWORKS

The temperature coefficient of resistance of nickel sensors is very high but nonlinear as indicated in the graph. The sensor resistance can be measured directly and converted to temperature with the charts supplied in Tech Note TN-506, but since TG Sensors are commonly used along with strain gages, special matching networks have been developed to use with strain gage instrumentation.

These LST Matching Networks are small passive devices encapsulated in a molded epoxy case. They are connected between TG Temperature Sensors and the strain gage readout instrumentation to perform the following three functions:

1. Linearize the gage resistance versus temperature.
2. Attenuate the resistance change slope to the equivalent of 10 or 100 microstrain per degree F or C for a gage factor setting of 2.000 on the strain indicator.
3. Present a balanced 350-ohm half-bridge circuit to the strain indicator at the reference temperature of 0°F (Fahrenheit networks) or 0°C (Celsius networks).



In order to optimize performance, separate network designs are available for cryogenic and normal temperature ranges. Environmental temperature range of LST networks is -65° to +250°F [-55° to +125°C]. Standard strain gage instrumentation, such as the Micro-Measurements Model P3, is ideal for use with these sensors, eliminating the need to purchase separate readout devices.

LOW TEMPERATURE RANGE		
NETWORK DESIGNATION	OUTPUT SLOPE	SENSOR TEMPERATURE RANGE
LST-10F-350C	10 microstrain/°F	-320° to +100°F
LST-10C-350C	10 microstrain/°C	-200° to +25°C
LST-100F-350C	100 microstrain/°F	-320° to +100°F
LST-100C-350C	100 microstrain/°C	-200° to +25°C

NORMAL TEMPERATURE RANGE		
NETWORK DESIGNATION	OUTPUT SLOPE	SENSOR TEMPERATURE RANGE
LST-10F-350D	10 microstrain/°F	-200° to +500°F
LST-10C-350D	10 microstrain/°C	-150° to +260°C
LST-100F-350D	100 microstrain/°F	-200° to +500°F
LST-100C-350D	100 microstrain/°C	-150° to +260°C

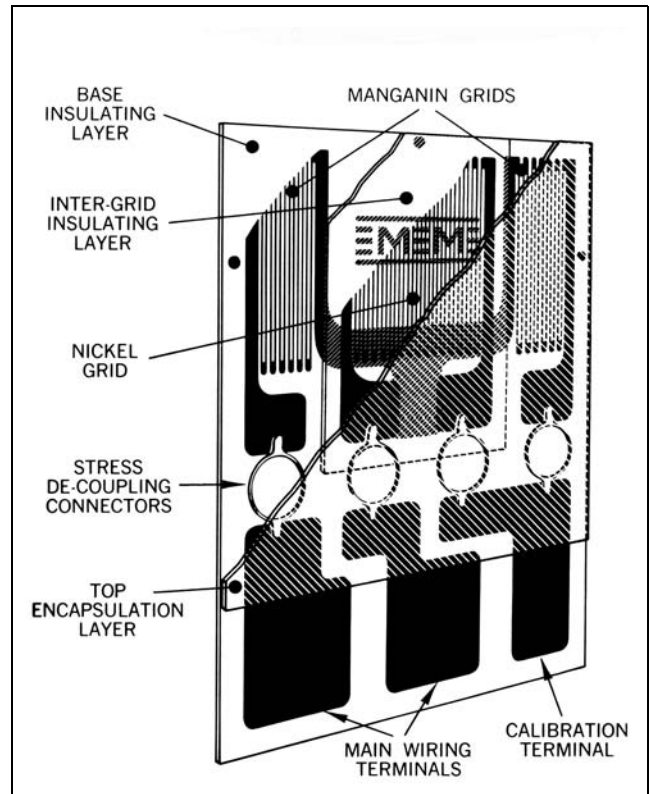
Special Use Sensors - Temperature

CLTS-2B TEMPERATURE SENSORS

The Cryogenic Linear Temperature Sensor (CLTS) is recommended for best accuracy over the temperature range of -452°F [-269°C] to $+100^{\circ}\text{F}$ [$+40^{\circ}\text{C}$]. The CLTS-2B is a small surface thermometer gage consisting of two thin foil sensing grids laminated into a glass-fiber-reinforced epoxy-phenolic matrix, and electrically wired in series. The two alloys are special grades of nickel and manganin that are processed for equal and opposite nonlinearities in resistance versus temperature characteristics. The CLTS-2B is fabricated with integral printed-circuit terminals to provide strong, convenient attachment points for the leadwires. Gage construction is illustrated at right.

Because of its low thermal mass and thin construction, the CLTS-2B responds quickly and accurately to temperature changes in the surface to which it is bonded. Special design features protect the sensor from damage due to thermal shock, even during plunges from room temperature directly into liquefied gases, including LHe at -452°F [-269°C].


Avoid prolonged exposure of the CLTS-2B to temperatures above $+150^{\circ}\text{F}$ [$+65^{\circ}\text{C}$] as this may adversely affect characteristics of the manganin material. The maximum recommended curing temperature of the bonding adhesive is two hours at $+200^{\circ}\text{F}$ [$+95^{\circ}\text{C}$].




CLTS-2B SENSITIVITY

The nominal resistance of the CLTS-2B is 290.0 ohms $\pm 0.5\%$ at $+75^{\circ}\text{F}$ [$+23.9^{\circ}\text{C}$]. The resistance decreases linearly with temperature, reaching a nominal value of 220.0 ohms at -452°F [-269°C]. This represents a change of 70 ohms for 527°F , or a slope of 0.1328 ohms per degree F; the

corresponding slope on the Celsius scale is 0.2391 ohms per degree C. With proper instrumentation a resolution of 0.01° can be easily achieved. Data readout can be accomplished by directly monitoring resistance change with an appropriate resistance measuring instrument.

GAGE PATTERN AND DESIGNATION Actual size shown	DIMENSIONS					
	GAGE LENGTH	OVERALL LENGTH	GRID WIDTH	OVERALL WIDTH	MATRIX	
					Length	Width
CLTS-2B 	0.130	0.205	0.280	0.280	0.43	0.31
	3.30	5.21	7.11	7.11	10.9	7.9

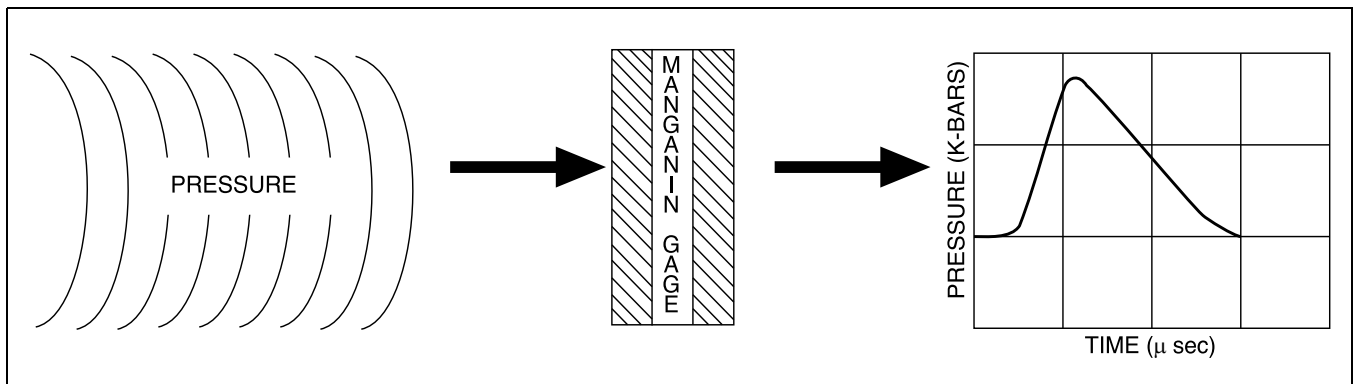
CLTS MATCHING NETWORKS



When used in conjunction with bonded strain gages, it is often most convenient to modify the CLTS output with a simple, passive resistance network that can be used with strain gage instrumentation as described with the TG Sensors. The sensitivity can be adjusted to 10 micro-strain per degree C (CLTS-N-C); with a

resolution of 0.1° when used with most strain indicators. This type of network also provides a high degree of leadwire compensation. Environmental temperature limits for CLTS Networks are -65° to $+250^{\circ}\text{F}$ [-55° to $+125^{\circ}\text{C}$].

Special Use Sensors - Manganin Pressure Sensor



FOR HIGH-PRESSURE MEASUREMENTS SHOCK WAVE PROPAGATION • BLAST EFFECT • EXPLOSIVE-FORMING STUDIES HIGH HYDROSTATIC PRESSURES

Manganin is a copper-manganese-nickel alloy with a low strain sensitivity, but a relatively high sensitivity to hydrostatic pressure. Resistance change as a function of applied pressure is linear to extremely high pressures. This characteristic has been utilized in the construction of high-range fluid pressure cells using manganin wire for many years.

Manganin gages are used extensively in high-pressure shock wave studies ranging from 1 to over 400 kilobars (1 bar = 14.5 psi = 100 000 N/m²). In conventional applications, the gage is bonded between two flat metallic or polymer plates.

Micro-Measurements offers a large selection of gages for shock wave studies, manufactured from specially treated shunt stock manganin foil. The ultrathin construction offers several advantages over the wire type, including:

- Improved repeatability from gage to gage, due to precisely defined grids manufactured from the same lot of foil.
- Faster response times (nanosecond rise times have been recorded).
- Smaller, high resistance grids.
- Minimal distortion of the pressure wave when mounted in high-modulus materials.

TECHNICAL INFORMATION

Nominal pressure sensitivity of Micro-Measurements manganin foil gages is 0.27% per kilobar [0.0027 ohm/ohm/kb]. Long signal transmission cables, low signal levels, and high electrical noise complicate the measurement. Most of these gages are designed for

impedance matching to 50-ohm coaxial cable. The 210AW pattern illustrated has been used with excitation currents exceeding 6 amperes for periods to 100 microseconds.

The 580SF pattern was designed specifically for investigating the effects of sweeping explosive waves. With the target intentionally tilted at a small angle to the wave front, the pressure wave traverses the grid in the direction toward the leads.

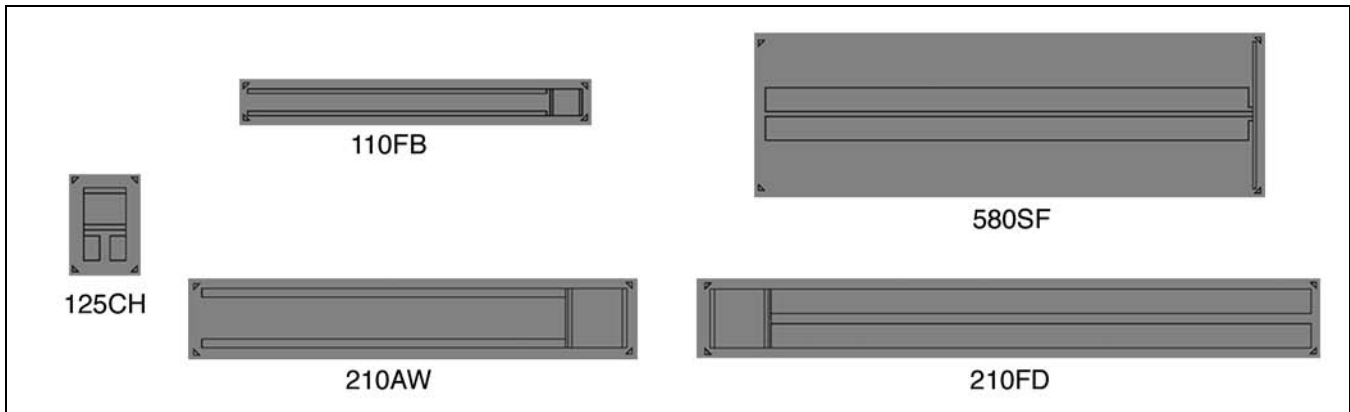
Micro-Measurements manufactures manganin foil gages in several backing materials. The backing material is normally selected to minimize the mechanical impedance mismatch within the target.

L backing is a glass-fiber-reinforced epoxy-phenolic approx. 0.002 in [0.050 mm] thick. Although commonly used in the 1- to 15-kilobar range, its usefulness is not limited to this extent. The backing is ideal for use in quartz-phenolic transducers since it does not present a significant impedance discontinuity. L-backed gages may be used in high-mechanical-impedance materials with the understanding that rise-time limitations may exist due to an impedance mismatch between the sensor and the test material. An encapsulated version (Option SP60), with only the tab ends exposed for soldering, is available.


N2 backing is nominally 0.0008 in [0.020 mm] thick polyimide film. This backing is rugged, highly flexible, and easy to handle. It is suited to very-low-kilobar pressure ranges.

J2 backing is an encapsulated version of the N2, with the ends of the tabs exposed.

Special Use Sensors – Manganin Pressure Sensor



MANGANIN GAGE SELECTION CHART

GAGE DESIGNATION†		FOIL THICKNESS	DIMENSIONS				inch
			OVERALL PATTERN		ACTIVE GRID		millimeter
			Length	Width	Length	Width	TAB LENGTH
LM-SS-110FB-048 LM-SS-110FB-048/SP60 N2M-SS-110FB-048 J2M-SS-110FB-048		0.0002	1.380	0.125	0.110	0.125	1.240
		0.005	35.05	3.18	2.79	3.18	31.49
LM-SS-125CH-048 LM-SS-125CH-048/SP60 N2M-SS-125CH-048 J2M-SS-125CH-048		0.0002	0.290	0.175	0.125	0.175	0.100
		0.005	7.37	4.45	3.18	4.45	2.54
LM-SS-210AW-048 LM-SS-210AW-048/SP60 N2M-SS-210AW-048 J2M-SS-210AW-048		0.0005	1.750	0.250	0.210	0.250	1.500
		0.013	44.45	6.35	5.33	6.35	38.10
LM-SS-210FD-050 LM-SS-210FD-050/SP60 N2M-SS-210FD-050 J2M-SS-210FD-050		0.0005	2.500	0.250	0.210	0.250	2.250
		0.013	63.50	6.35	5.33	6.35	57.15
LM-SS-580SF-025 LM-SS-580SF-025/SP60 N2M-SS-580SF-025 J2M-SS-580SF-025		0.0004	2.018	0.600	0.580	0.008	2.000
		0.010	51.26	15.24	14.73	0.20	50.80

†All resistance values are $\pm 1\%$, measured on the tab near the grid.

Special Use Sensors - Crack Detection Sensors

CD-Series Crack Detection Gages are designed to provide a convenient, economical method of indicating the presence of a crack, or indicating when a crack has progressed to a predetermined location on a test part or structure. By employing several CD gages, it is also possible to monitor the rate of crack growth; however, Crack Propagation Gages would normally be selected for that purpose.

In some applications, thin copper wires bonded to the test structure are used to provide a low-cost method of detecting crack initiation or propagation. Because of the behavior of copper wire, however, this method suffers from two limitations: (a) the crack tip may progress considerably beyond the wire without breaking the strand, and (b) in areas of high cyclic strains, the wire may fail in fatigue without crack initiation in the specimen. CD-Series Crack Detection Gages are designed to overcome both of these limitations.

CD-Series gages consist of a single strand of high-endurance alloy. A crack propagating beneath the gage will induce local fracture of the sensing strand and open the electrical circuit. When the CD gage is installed at critical locations on a test part or structure and used as a sensing element in a control system, the signal can serve to alter a test sequence or to alert an operator to incipient component failure.

CONSTRUCTION

Two gage constructions are currently available:

The **CD-02** is made of beryllium copper alloy laminated to polyimide, and offers a low-resistance sensing element. Select the CD-02 type for maximum conformability to irregular surfaces and ease of soldering, when greatest fatigue life is not required.

The **CD-23** type is constructed of isoelastic alloy laminated to a glass-fiber-reinforced backing for applications where the highest endurance is required. The superior fatigue life of the isoelastic alloy allows the CD-23 to be used in high cyclic

strain fields without premature failure, while maintaining high sensitivity to crack formation under the gage. This gage is less conformable than the CD-02 and requires use of SS-Flux for tinning of solder tabs for leadwire attachment.

Crack Detection Gages are available with various strand lengths; from 0.4 in [10 mm] for applications where space is limited, to 2.0 in [50 mm] for use where the direction of crack propagation, or the point of crack initiation, is uncertain.

Resistance of the CD Series is nominally 0.05 Ω /mm of active strand length for beryllium copper and 1 Ω /mm for isoelastic gages.

The normal operating temperature range is -320° to $+250^{\circ}$ F [-195° to $+120^{\circ}$ C].

ADHESIVES

Conventional strain gage adhesives are suitable for bonding CD-Series gages. M-Bond 600, 610, or 43-B are preferred for excellent performance over the widest operating temperature range. However, M-Bond AE-10 and AE-15 are also suitable where in-service temperatures will not exceed $+200^{\circ}$ F [$+95^{\circ}$ C]. M-Bond 200 is satisfactory for fast installation, but should not be used for long-term testing.

PROTECTIVE COATINGS

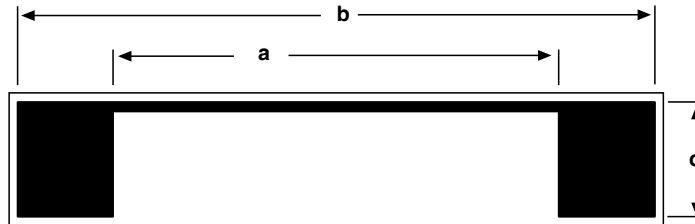
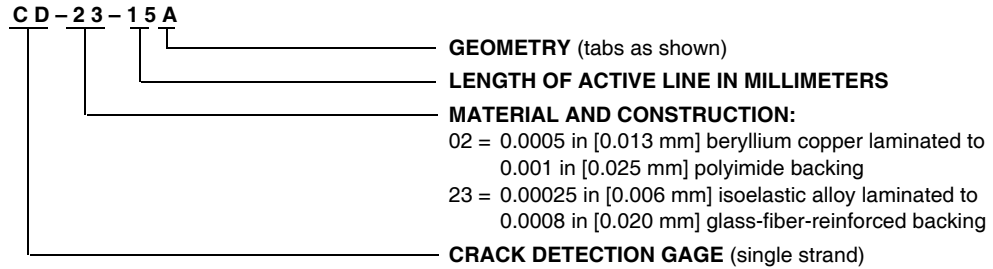
Corrosion, which can cause premature filament failure, is greatly accelerated in the presence of high cyclic strain fields. For long-term use, it is essential to protect the crack detection gage from atmospheric corrosion and other contamination.


M-Bond 43-B is an excellent protective coating when the bonding adhesive, leadwire insulation and solder can tolerate the cure temperature. If lower cure temperatures are necessary, M-Bond AE-10 and AE-15 are recommended. When in-service environmental conditions are not extreme, a softer coating may prove perfectly adequate. Either 3140 RTV or M-Coat D would be a good choice in these instances.

For repetitive use on identical structural shapes, special patterns may be designed to fit the expected crack formation area. Contact our Applications Engineering Department for details.

Special Use Sensors - Crack Detection Sensors

CD-SERIES GAGE DESIGNATION



GAGE DESIGNATION	 RoHS COMPLIANT	DIMENSIONS			inch	
		a	b	c	Length	Width
CD-02-10A		0.40	0.56	0.10	0.60	0.13
CD-23-10A		10.2	14.2	2.5	15.2	3.2
CD-02-15A		0.60	0.76	0.10	0.80	0.13
CD-23-15A		15.2	19.3	2.5	20.3	3.2
CD-02-20A		0.80	0.96	0.10	1.00	0.13
CD-23-20A		20.3	24.4	2.5	25.4	3.2
CD-02-25A		1.00	1.16	0.10	1.20	0.13
CD-23-25A		25.4	29.5	2.5	30.5	3.2
CD-02-50A		2.00	2.16	0.10	2.22	0.13
CD-23-50A		50.8	54.9	2.5	56.4	3.2

Special Use Sensors - Crack Propagation Sensors

Crack Propagation Gages provide a convenient method for indicating rate of crack propagation in a test part or structure. The CPA, CPB, and CPC patterns consist of a number of resistor strands connected in parallel. When bonded to a structure, progression of a surface crack through the gage pattern causes successive open-circuiting of the strands, resulting in an increase in total resistance. The CPA pattern incorporates 20 resistor strands; the CPB, with the same basic configuration, incorporates ten. Both series produce stepped increases in resistance with successive open-circuiting as indicated in the charts below. In applications where space permits, the CPC pattern may be preferred because of greater uniformity of increases in total resistance with successive strand fractures.

The resistor strands of the CPD pattern operate independently, each producing an open circuit when fractured. This type of gage allows the user to electrically predetermine a specific point in the fracturing process at which the instrumentation will perform some type of altering function.

GAGE CHARACTERISTICS

Crack Propagation Gages have a nominal gage thickness of only 0.0017 in [0.043 mm]. The high-endurance K-alloy foil grid has a single cycle strain range of up to $\pm 1.5\%$ with a

fatigue life of greater than 10^7 cycles at ± 2000 microstrain. The standard backing is a glass-fiber-reinforced epoxy matrix. These gages are useful through the temperature range of -452°F [-269°C] to over $+450^\circ\text{F}$ [$+230^\circ\text{C}$].

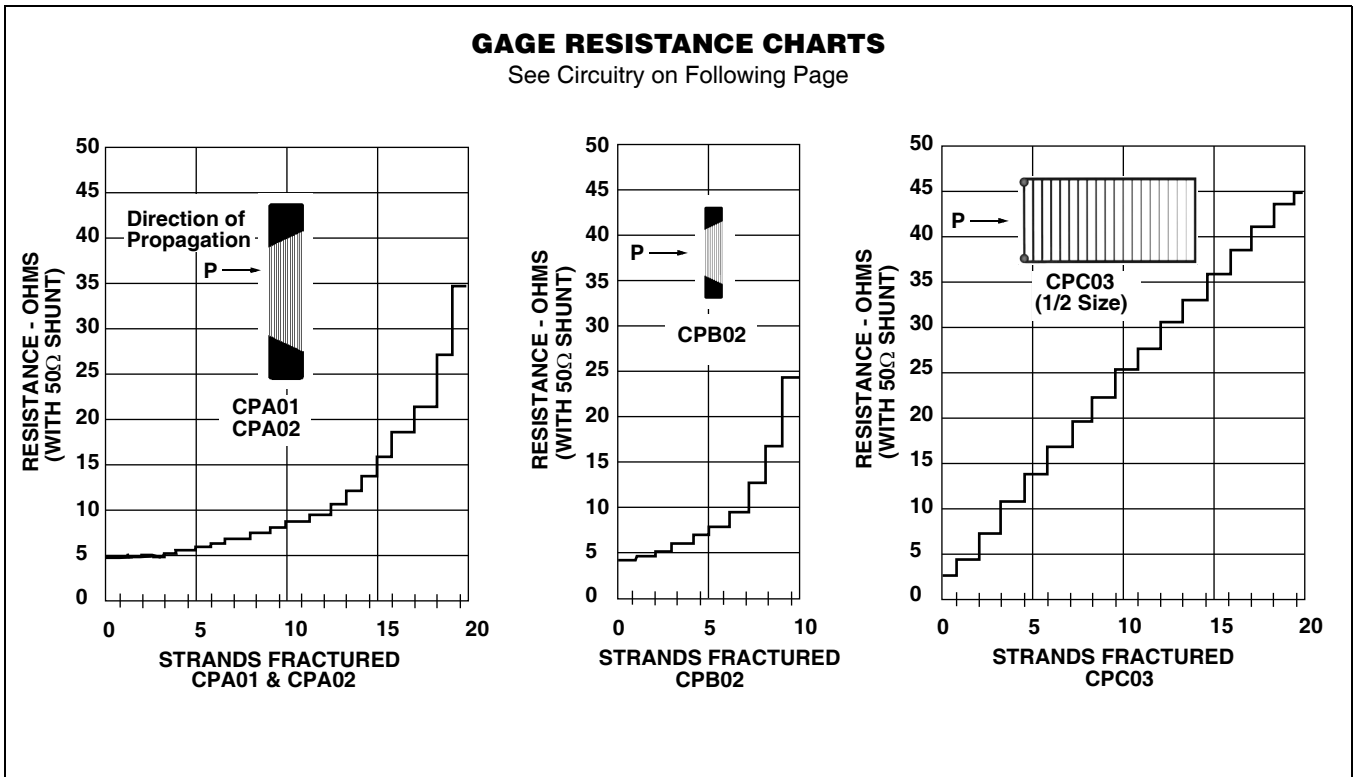
Since exact self-temperature compensation is unnecessary in crack propagation studies, all of these gages are supplied in 09 S-T-C.

Crack Propagation Gages feature small copper pads on the tabs for ease of soldering.

ADHESIVES AND PROTECTIVE COATINGS

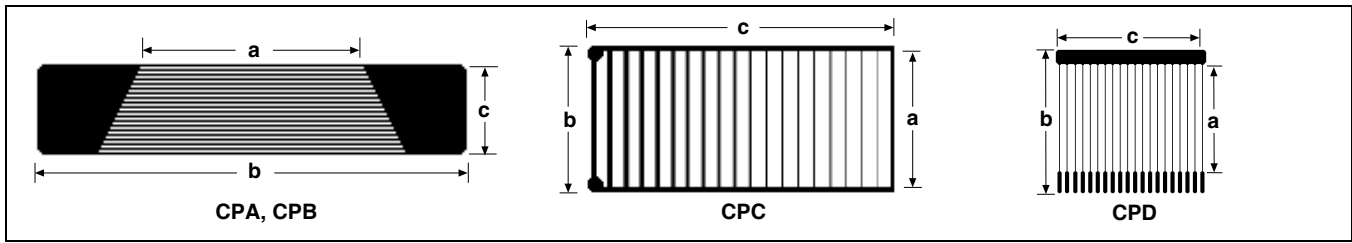
Crack Propagation Gages should be installed with a solvent-thinned adhesive incorporating a cure temperature of at least $+300^\circ\text{F}$ [$+150^\circ\text{C}$]. M-Bond 600 or 610 adhesives are recommended for use over the widest temperature range. Handling tape should not be applied over the grid or soldering tabs during installation. Room-temperature-curing adhesives are not recommended for use with Crack Propagation Gages.







Protective coating selection considerations are similar to those for CD-Series Crack Detection Gages. Refer to appropriate datasheet for protective coating recommendations.



Crack Propagation Patterns

Special Use Sensors - Crack Propagation Sensors



GAGE PATTERN AND DESIGNATION	 RoHS COMPLIANT	NOMINAL RESISTANCE IN OHMS	DIMENSIONS				
			a	b	c	MATRIX	
						Length	Width
TK-09-CPB02-005/DP 		5	0.25	0.50	0.10	0.56	0.16
			6.4	12.7	2.5	14.2	4.1
			Ten Grid Lines — 0.010 in [0.25 mm] between centerlines.				
TK-09-CPA01-005/DP 		5	0.50	1.00	0.20	1.08	0.28
			12.7	25.4	5.1	27.4	7.1
			Twenty Grid Lines — 0.010 in [0.25 mm] between centerlines.				
TK-09-CPA02-005/DP 		5	1.00	2.00	0.40	2.08	0.48
			25.4	50.8	10.2	52.8	12.2
			Twenty Grid Lines — 0.020 in [0.51 mm] between centerlines.				
TK-09-CPC03-003/DP 		3	0.70	0.75	1.57	0.80	1.62
			17.8	19.1	39.9	20.3	41.1
			Twenty Grid Lines — 0.080 in [2.03 mm] between centerlines.				
TK-09-CPD01-NRA/DP 		110	0.75	1.00	1.00	1.11	1.11
			19.1	25.4	25.4	28.1	28.1
			Twenty Grid Lines — 0.050 in [1.27 mm] between centerlines.				

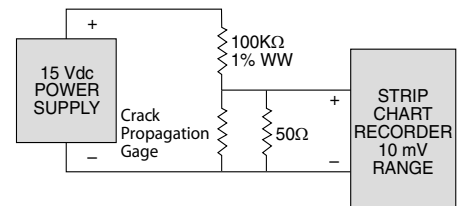
CIRCUITRY

CPA, CPB, AND CPC PATTERNS

An ohmmeter with milliohm sensitivity is a suitable readout instrument. Alternately, a strip chart recorder, connected in the manner shown at right, can be used to obtain a step curve of strands broken versus time.

CPD Pattern

Low voltage instrumentation can be employed to shut off a motor, sound an alarm, or trigger some other type of alerting function.



Conventional strain gage instrumentation is not readily adaptable for use with Crack Propagation Gages.

Linear Displacement Sensor



FEATURES

- Infinite resolution
- True output linearity over the entire measurement range
- Low operating forces
- Excellent stability and temperature compensation

DESCRIPTION

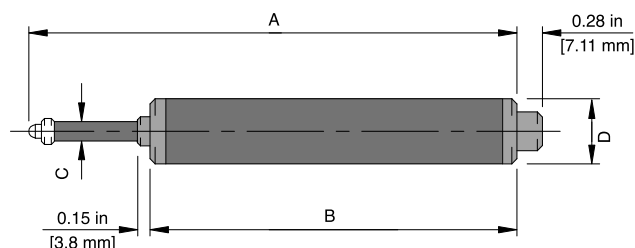
Micro-Measurements Linear Displacement Sensors use a fully active 350-ohm strain-gage bridge to sense spindle displacement, giving infinite resolution and excellent linearity. They are compatible with all standard strain-gage instrumentation with bridge excitation from 2 to 10 volts. With a selection of models having full-scale ranges from 1/4 in [5 mm] to 4 in [100 mm], Linear Displacement Sensors feature a unique design that produces maximum operating forces of less than 1 lb [4.4 N]. Available with specially designed mounting fixtures, these versatile sensors are ideally suited for us in research, manufacturing and process control applications.

Accuracy

Micro-Measurements Linear Displacement Sensors produce an output voltage proportional to a captive, guided spindle displacement by means of a 350-ohm strain gage bridge with four active arms. This arrangement provides excellent temperature compensation and linearity.

Compatibility

Micro-Measurements Linear Displacement Sensors exhibit the same inherent advantages for linearity, versatility and precision as many other strain-gage-based sensors. As such, they are systems-compatible with a wide range of commonly used sensors for pressure, load, acceleration, vibration, etc. and normally utilize the same instrumentation.



SPECIFICATIONS

MODEL HS	5	10	25	50	100	
*Displacement Range	0.25 in [6.5 mm]	0.5 in [11.2 mm]	1 in [26 mm]	2 in [51.5 mm]	4 in [102 mm]	
Dimensions	A	4.10 in [104.2 mm]	4.30 in [109.2 mm]	5.44 in [138.2 mm]	8.48 in [215.4 mm]	14.97 in [380.2 mm]
	B	3.49 in [88.6 mm]	3.49 in [88.6 mm]	4.08 in [103.6 mm]	6.11 in [155.2 mm]	10.47 in [266.0 mm]
	C\varnothing	0.19 in [4.8 mm]	0.19 in [4.8 mm]	0.19 in [4.8 mm]	0.19 in [4.8 mm]	0.24 in [6.0 mm]
	D\varnothing	0.69 in [17.4 mm]	0.69 in [17.4 mm]	0.69 in [17.4 mm]	0.69 in [17.4 mm]	1.0 in [25.4 mm]
Weight	0.31 lb [140 g]	0.31 lb [140 g]	0.33 lb [150 g]	0.44 lb [200 g]	1.10 lb [500 g]	
Spring Force*	0.44 lb [200 g]	0.55 lb [250 g]	0.55 lb [250 g]	0.66 lb [300 g]	0.77 lb [350 g]	
Excitation	2 to 10 V, ac or dc					
Frequency Response*	5-mm displacement: 100 Hz; 100-mm displacement: 10 Hz					
Rated (F.S.) Output*	4.5 mV/V	5.3 mV/V	7.0 mV/V	3.6 mV/V	5.2 mV/V	
Nonlinearity (Best-Fit Method)*	0.35% FS	0.35% FS	0.35% FS	0.35% FS	0.35% FS	
Resolution	Infinite					
Bridge Resistance (Nominal)	350 ohms Bridge, 100k ohms Zero Balance					
Temperature Range	+15 to +140°F [-10 to +60°C]					
Temperature Coefficient (%FS)*	Zero <0.006%/°F [<0.01%/°C]		Span <0.006%/°F [<0.01%/°C]			
Termination	0.18 in PVC 7/0.008 [4.5 mm PVC 7/0.2], 4-core shielded, 6.6 ft [2.2 m] long					
Electrical Connections	Input: Red+ Black- ; Output: Green+ White-					

*Typical figures: Actual values subject to calibration.

Linear Displacement Sensor

FATIGUE LIFE

Model	Displacement (in)				
	0.25	0.50	1.00	2.00	4.00
	Cycles to Failure (Nominal)				
HS5	5.00E+04				
HS10	5.00E+05	5.00E+04			
HS25	5.00E+06	5.00E+05	5.00E+04		
HS50	5.00E+06	5.00E+06	5.00E+06	5.00E+05	
HS100	5.00E+06	5.00E+06	5.00E+06	5.00E+05	5.00E+04
	Signal (mV/V)				
HS5	4.50				
HS10	2.65	5.30			
HS25	1.75	3.50	7.00		
HS50	0.45	0.90	1.80	3.60	
HS100	0.32	0.65	1.30	2.60	5.20

*Please note that recommended displacements are indicated by shading.

Cable-Extension Displacement Sensor



FEATURES

- Full-scale ranges from 5 to 50 inches
- Rugged, low profile design
- Switch-selectable potentiometer and Wheatstone bridge output circuits
- Standard RJ-45 electrical connections.
- Compatible with all Micro-Measurements strain gage and high-level-signal instrumentation.
- Easy to install and use.

DESCRIPTION

The Micro-Measurements Cable-Extension Displacement Sensor provides a voltage signal linearly proportional to the extension of a retractable stainless steel cable. Used for indicating the displacement of the test structure, member or part to which the cable is attached, installation is quick and easy. Simply attach the base of the sensors to a reference

surface, the cable to the component being displaced, and the electrical leads to any instrument accepting strain-gage or high-level signal inputs. With the certified calibration data and wiring instructions provided with each sensor, you will be making displacement measurements in minutes.

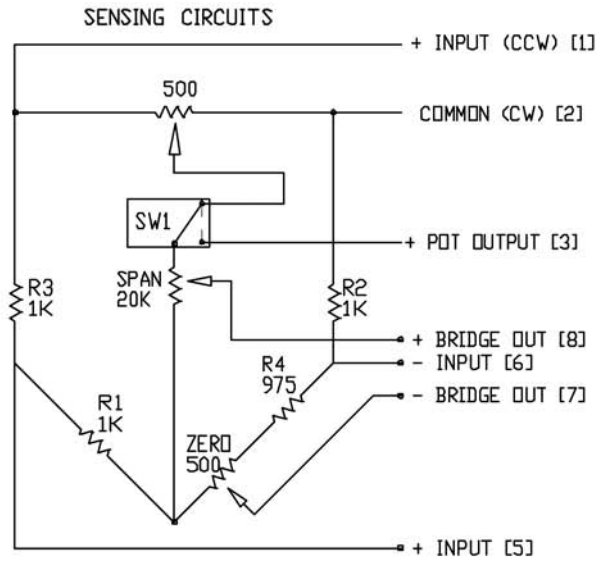
SPECIFICATIONS

MODEL		CDS-05	CDS-10	CDS-20	CDS-30	CDS-40	CDS-50
Measurement Range	in [mm]	5 [127 mm]	10 [254 mm]	20 [508 mm]	30 [762 mm]	40 [1016 mm]	50 [1270 mm]
Accuracy	% FS	0.25	0.15	0.10	0.10	0.10	0.10
Resolution		Analog (Effectively infinite, limited only by instrumentation)					
Repeatability		Greater of ± 0.001 in [± 0.025 mm] or 0.02% FS					
Cable Retraction Force (min)	oz. [N]	3.5 [1.0]	8.4 [2.3]	8.4 [2.3]	6.3 [1.8]	4.2 [1.1]	3.5 [1.0]
Cable Extension Force (max)	oz. [N]	6.5 [1.8]	15.6 [4.3]	15.6 [4.3]	11.7 [3.3]	7.8 [2.2]	6.5 [1.8]
Cable Acceleration	g	3	11	11	5	4	3
Vibration	g, Hz	Up to 10, 0 - 2000					
Shock	g, mS	100, 0.1					
Sensor		Plastic-hybrid precision potentiometer					
Resistance	ohms	500					
Maximum Supply Voltage - Potentiometer	V	30					
Maximum Supply Voltage - Bridge	V	30					
Output - Bridge	mV/V FS	3.0 typical					
Case		Powder-painted aluminum alloy					
Cable		Nylon-coated stainless steel, 0.019 in [0.48 mm] diameter					
Electrical Connector		RJ-45 receptacle					
Weight	lb [kg]	2 [1] typ.					
Operating Temperature	°F [°C]	- 40 to + 200 [- 40 to 93]					
TC of Sensor	ppm/°F [ppm/°C]	88 [157]					
Humidity	% RH	100 at 90 °F [32 °C]					

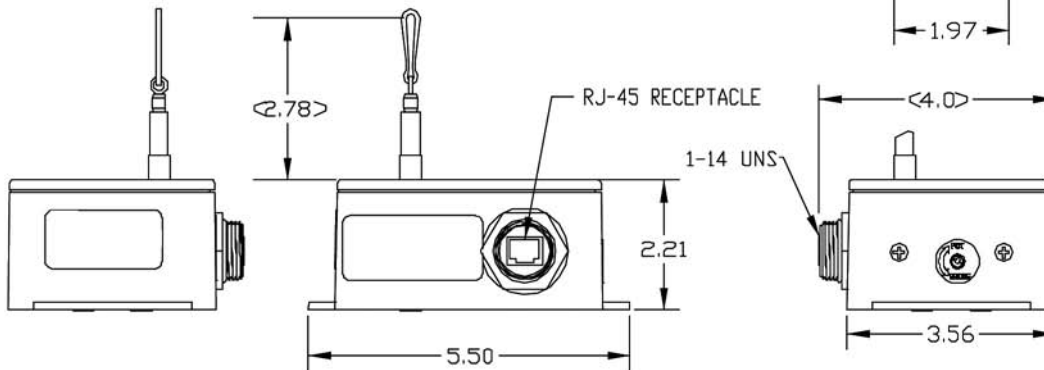
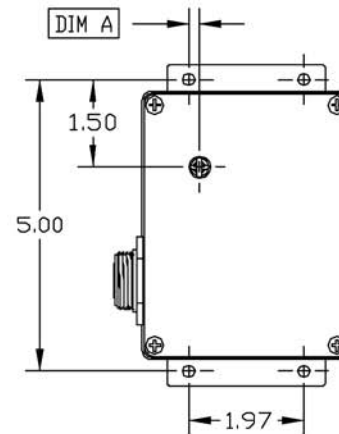
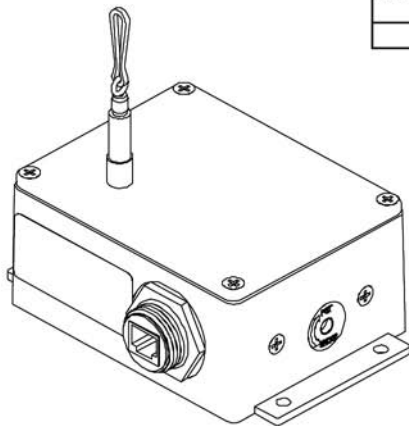
Cable-Extension Displacement Sensor

Cable-Extension Displacement Sensor

DIMENSIONS



MEASUREMENT RANGE (INCHES)	5	10	20	30	40	50
DIMENSION "A"	0.16	0.65	0.65	0.43	0.35	0.16





Strain Gage Installation..... 144
Instrument Selection 147

Strain Gage Accessories & Instruments

Micro-Measurements Strain Gage Accessories

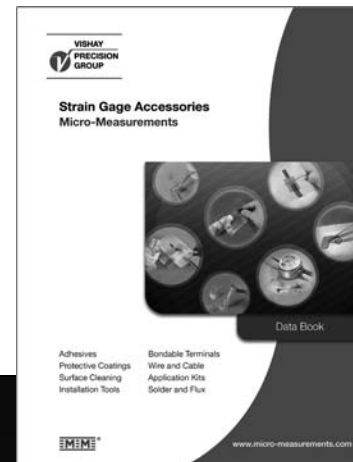
Micro-Measurements strain gages are produced under rigidly controlled manufacturing conditions, with the utmost care and attention given to ensuring the high level of quality for which these gages have gained world-wide recognition. However, the gages' full potential for accurate strain measurement can be realized only when they are properly installed. There are, in fact, three principal components in every strain gage installation: (1) The strain gage itself, (2) the tools, materials, and supplies (accessories) needed to install the gage, and (3) the techniques employed in performing the installation. Professional stress analysts have learned from experience that compromising any of these may lead to compromising the quality of the installation and the accuracy of the strain data.

The well-established formula for making consistently successful strain gage installations is quite simple:

- Select high-quality precision strain gages.
- Select professional-caliber accessories which have been laboratory-tested and field-proven for effectiveness and compatibility with the strain gages.
- Follow the installation procedures recommended by the manufacturer of the gages and accessories.

A small sample of the Micro-Measurements strain gage installation accessories is featured on the following two pages. As indicated, the appropriate materials, supplies, and tools are available for each important step in the gage installation process – from preparing the surface of the test piece to applying a protective coating over the bonded and wired gage. All accessory items, whether manufactured directly by Micro-Measurements or specified for purchase from an outside supplier, are of the highest quality, and have been designed or selected specifically to help ensure successful installation of Micro-Measurements strain gages.

Regular users of strain gages will want to request a copy of Micro-Measurements Strain Gage Accessories databook. This fully illustrated catalog describes the complete line of gage installation accessories and related equipment. In addition to detailed product descriptions and specifications, it includes, where applicable, extensive recommendations for the appropriate selection and application of the accessories. Micro-Measurements Strain Gage Accessories databook is available on request from our Applications Engineering Department. A complete listing is available on the internet at <http://www.vishaypg.com/micro-measurements/installation-accessories/>.



Micro-Measurements Strain Gage Accessories

6 SIMPLE STEPS TO SUCCESSFUL STRAIN GAGE INSTALLATION

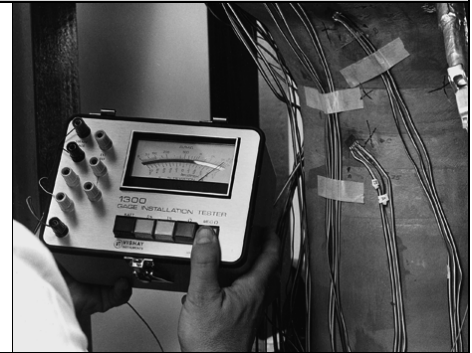
Surface Preparation		
	<p>CSM-2 Degreaser M-Prep Conditioner A M-Prep Neutralizer 5A Silicon-Carbide Paper Cotton Swabs Gauze Sponges</p>	
Adhesive Selection		
	<p>M-Bond 200 M-Bond AE-10 M-Bond AE-15 M-Bond 600 M-Bond 610</p>	
Gage Handling and Bonding		
	<p>Gage Handling Tape Mylar® Tape Spring Clamps Teflon® Film Silicone Rubber Application Tools</p>	
Leadwire Attachment		
	<p>Solder Terminals Wires, Cables – Solid, Stranded, Tinned Solders Soldering Station Wiring Tools</p>	
Protective Coating Application		
	<p>M-Coat A Polyurethane M-Coat B Nitrile Rubber M-Coat C Silicone Rubber M-Coat D Acrylic M-Coat W-1 Microcrystalline Wax</p>	

Micro-Measurements Strain Gage Accessories

Gage Installation Tester



Reads insulation resistance (leakage) to 20 000 M Ω with 15 Vdc.
Measures deviation of installed gage resistance from precise standards to a resolution of 0.02%.
Auxiliary ohmmeter scale for troubleshooting questionable installations.
Reads with the push of a button.
Verifies the complete gage circuit including leadwires.



GENERAL APPLICATION KITS



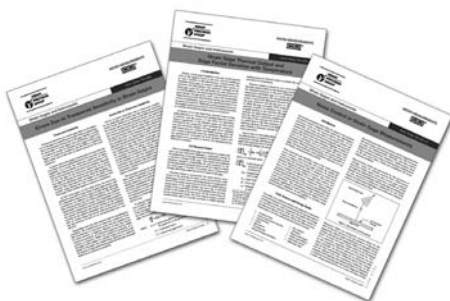
It is often of greatest convenience for the strain gage user to purchase all of the needed accessory supplies and materials in a single package.

GAK-2 Series Kits provide specific selections of M-LINE accessories for making basic strain gage installations with the M-Bond 200, AE-10, or 610 Adhesives.

The ultimate in gage installation capability is provided by the **MAK-1, Master Strain Gage Application Kit**. The MAK-1 includes all of the supplies and special tools necessary for making a wide range of gage installations for both laboratory and field applications.



INSTRUCTIONAL MATERIALS



Because technique is such an important ingredient in successful strain gage installation, detailed **Instruction Bulletins** have been prepared for virtually all Micro-Measurements strain gage installation products.

In addition, a library of **Tech Notes and Application Notes** is available for reference on a broad range of subjects within Strain Gage Technology.

Application Notes present practical strain gage application techniques for “out-of-the-ordinary” situations, and represent, as much as possible, a practical “how-to” approach to strain gage installation.

Tech Notes contain in-depth technical treatments of specific subjects having direct or indirect bearing on the successful application of stress/strain measurement technology.

Considerations for Instrument Selection

STRAIN INDICATORS



Basic instrumentation requirements call for stability, accuracy and high resolution when making measurements under static loading conditions, and particularly where measurements are to be taken over long periods of time. Micro-Measurements offers our Model P3 Strain Indicator to meet these demanding criteria.

The Model P3 Strain Indicator and Recorder is a portable, battery-operated instrument capable of simultaneously accepting four inputs from quarter-, half-, and full-bridge strain-gage circuits, including strain-gage-based transducers. A highly stable measurement circuit, regulated bridge excitation supply, and precisely settable gage factor enable measurements of $\pm 0.1\%$ accuracy and 1 microstrain resolution. Data, recorded at a user-selectable rate of up to 1 reading per channel per second, is stored on a removable multimedia card and is transferred by USB to a host computer for subsequent storage, reduction and presentation with the supplied software. The P3 can also be configured and operated directly from your PC with a separate software application included with each instrument.

SIGNAL CONDITIONING AMPLIFIERS



When signals are produced by dynamically applied loads at frequencies above 0.1Hz, or are transients, measuring instrumentation requires adequate frequency response, and a wide amplifier gain range for output to the appropriate recording or display device. Such an instrument consists of an amplifier and signal conditioner with a built-in or shared power supply. Individual units are normally required for each channel when simultaneous recording or multiple channels are needed. With the output sent to a suitable display device, signal conditioning amplifiers can be used for making long-term measurements under static loading conditions, when maximum stability and accuracy are not primary considerations.

The A2, 2100, 2200, and 2300 Systems accept low-level signals, and condition and amplify them into high-level outputs suitable for multiple channel, simultaneous, dynamic recording. All of these systems can be used in conjunction with a variety of recording devices.

DIGITAL DATA SYSTEMS

Depending on their design, digital data systems can be used for measurement of static, dynamic, or both kinds of signals. Micro-Measurements offers three digital data systems, each controlled with StrainSmart[®] software and other third-party software..

System 5000 is a complete test and measurement data system for stress analysis and structural materials testing. Each 5100B scanner provides fast static data acquisition and digitization of 20 channels of various inputs. System flexibility allows for mixing types of input cards within a scanner for various input types including strain gages, thermocouples, LVDTs, load cells, and other transducer high level inputs. The system can be built up to 1200 channels, utilizing 60 scanners. Scan rates of up to 100 samples per second are available for simultaneous reading of all sensor inputs.

System 6000 is used for dynamic signals with scanning rates up to 10,000 samples per second per channel and up to 1200 channels. System 6000 provides individual analog-to-digital conversion on each channel and simultaneous sampling data acquisition for all channels. Selectable, digital Finite Impulse Response (FIR) low-pass filtering is incorporated into each instrumentation channel to meet a variety of testing requirements. Custom filters are also available.

System 7000 is a high performance dynamic data acquisition instrument with measurement accuracy of $\pm 0.05\%$ of full scale. Each sensor card employs a 24-bit analog to digital converter enabling 0.5 microstrain resolution. Scan rates up to 2048 samples per second are available for simultaneous reading of all sensor inputs. A combination of analog and flexible Finite Impulse Response (FIR) filters are available to provide adequate anti-alias filtering at all scanning rates. Electronically selectable bridge completion resistors allow the user to choose between 120-, 350-, and 1000-ohm strain gages through software selection. System 7000 is capable of self-calibration with a removable calibration reference.



Instrument Selection Guide

STRAIN INDICATORS						
Instrument	Display	Operation	Bridge Excitation	Input Power	Multi-Channel	Remarks
P3	Digital	Manual, Direct-Reading	1.5Vdc	Battery, USB, or AC Adapter	Automatic	Portable, 4-channel 0.1% Accuracy

SIGNAL CONDITIONING AMPLIFIERS						
Instrument	Frequency Response (1)	Output (±)	Amplifier Gain	Bridge Excitation	Input Power	Remarks
A2	DC 110kHz -3dB	10V	125-2500	DC 0.0-10V	DC (AC optional)	General-Purpose Signal Conditioner with Digital Control
2100	DC 15kHz -3dB	10V at 100mA	Continuously Variable 1-2100	DC 0.5-12V	AC	High Performance Amplifier For Simultaneous Dynamic Recording
2200	DC 50kHz -0.5dB DC 100kHz -3dB	10V at 10mA and 1Vrms at 10mA	Continuously Variable 1-3300	DC: 0.5-15V or 0.5-30mA	AC	High Performance, For Demanding Environments
2300	DC 60kHz -0.5dB DC 145kHz -3dB	10V	Continuously Variable 1-11,000	DC: 0.7-15V (11 steps) 0.2-7V Variable	AC	High-Frequency Response Multi-Feature Signal Conditioner

(1) Typical - see specific product bulletin and/or instruction manual for detailed performance specifications.

DIGITAL DATA SYSTEMS						
Instrument	Operating Mode (2)	Channels	Scanning Rate	Bridge Excitation (3)	Input Power	Remarks
5000 (5100)	Stationary, Online	5-1200 (in increments of 5)	1-100 Samples/ Sec/Channel	0-10Vdc Programmable	AC	5-Hz Low-Pass Filter
6000 (6100)	Stationary, Online	1-1200	10-10,000 Samples/ Sec/Channel	0-10Vdc Programmable	AC	Programmable Digital Filters to 4kHz
6000 (6200)	Remote, Stand-Alone	1-1200	10-10,000 Samples/ Sec/Channel	0-10Vdc Programmable	DC (AC Optional)	Programmable Digital Filters to 4kHz
7000	Stationary, Online	Unlimited (in increments of 8)	10-2048 Samples/ Sec/Channel	0-10Vdc Programmable	DC (AC Optional)	Programmable Digital Filters to 800Hz

(2) All systems can be operated with StrainSmart software for data acquisition, storage, reduction, and presentation, or with other third-party software.

(3) Strain gage cards only.

Considerations for instrument selection are provided on the previous page for all general-purpose instrumentation and data systems produced by Micro-Measurements. Additionally, our Applications Engineering staff is always available to assist you in selecting the right instrument for your specific applications.



Gage Series -
Stress Analysis Gages 150

Optional Features -
Stress Analysis Gages 158

Technical Data for General-Use Strain Gages

Technical Data

GAGE SERIES

All Micro-Measurements strain gages incorporate precision foil grids mounted on organic backing materials. The strain-sensing alloys and backing materials cannot be arbitrarily combined in specifying a gage type. Instead, a selection must be made from among the available gage systems, or series, where each series generally incorporates special design or construction features, as well as a specific combination of alloy and backing material.

Descriptions of all standard gage series are given on the following pages, along with performance specifications and application notes. The information includes, in each case, the alloy and backing combination employed, as well as the principal construction features common to the series. The allowable strain range is specified, and operating temperature ranges are recommended for different types of applications.

The plots of cyclic strain level versus number of cycles shown for each series represent general guidelines for the nominal fatigue characteristics. This data is a function of gage size with the upper curve indicative of larger gage patterns, and the lower curve of smaller gage patterns. Since the fatigue life of a strain gage is subject to special interpretation, reference should be made to Micro-

Measurements Tech Note TN-508, Fatigue Characteristics of Micro-Measurements Strain Gages, for a full understanding of the plotted data.

The fatigue curves on the following pages correspond to fully reversed strain levels. They can also be applied, approximately, to unidirectional strains and to combinations of mean and variable strains by derating the peak-to-peak amplitude by 10%. As an example, a fully reversed strain range of $\pm 1500\mu\epsilon$ is approximately equivalent in gage fatigue damage to strain levels of:

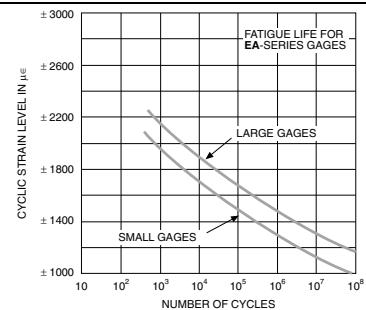
- 0 to $+2700\mu\epsilon$
- 0 to $-2700\mu\epsilon$
- -200 to $+2500\mu\epsilon$

However, a mean strain which increases in the tensile direction during cycling will lead to much earlier failure.

It must be noted that all performance specifications for strain gages are nominal, since the behavior of a particular gage may be modified by installation or application circumstances. Moreover, the specifications apply primarily to gages of 0.125 in [3 mm] gage length and larger, and without optional features, unless otherwise indicated.

EA Series

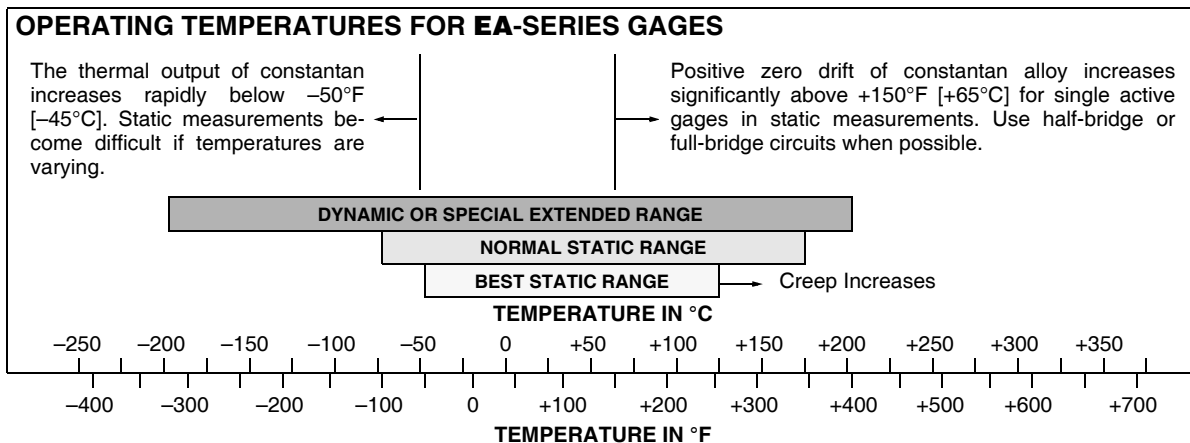
EA-Series constantan gages are widely used in general-purpose experimental stress analysis applications. The basic gage is of open-faced construction on a 0.001 in [0.025 mm] tough, flexible cast polyimide backing. The strength and heat resistance of this backing provide excellent handling and performance qualities. This series is available in the widest range of patterns and will usually be the lowest in cost for a particular pattern design. A large number of options may be obtained for EA-Series gages, covering various forms of lead attachment and protective encapsulation. The backing is treated for strong bond formation with all standard strain gage adhesives. Strain limits are approximately $\pm 5\%$ for gages of 1/8 in [3 mm] or greater gage length and $\pm 3\%$ for smaller sizes.



OPERATING TEMPERATURES FOR EA-SERIES GAGES

The thermal output of constantan increases rapidly below -50°F [-45°C]. Static measurements become difficult if temperatures are varying.

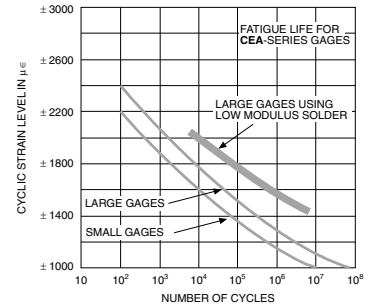
Positive zero drift of constantan alloy increases significantly above $+150^\circ\text{F}$ [$+65^\circ\text{C}$] for single active gages in static measurements. Use half-bridge or full-bridge circuits when possible.



Technical Data

CEA Series

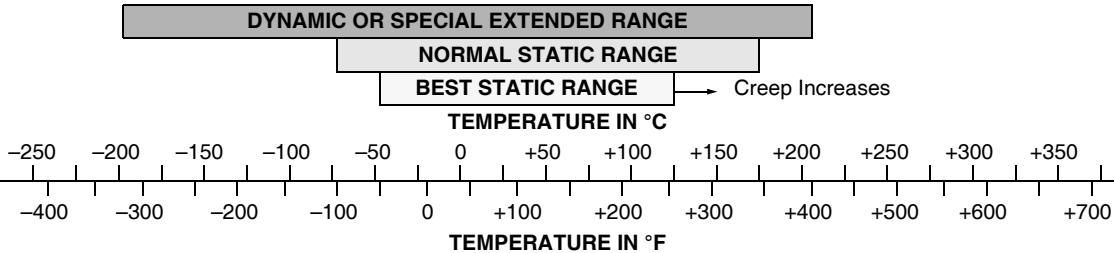
CEA-Series gages are the most widely accepted for use in general-purpose experimental stress analysis applications in the world today. These polyimide encapsulated constantan gages feature large, rugged, copper-coated tabs. This construction provides optimum capability for attaching leadwires directly to the tabs, eliminating the need for separate terminals. In most applications, the CEA Series is preferred over the EA Series with options such as E, L, LE and W. Nominal single-plane gage thickness is 0.0027 in [0.069 mm]; stacked rosettes, 0.0039 in [0.099 mm]. The extremely tough but flexible cast polyimide carrier can be contoured to almost any radius. Strain limits are approximately $\pm 5\%$ [50 000 $\mu\epsilon$] for gage lengths 1/8 in [3 mm] or greater, and $\pm 3\%$ for smaller sizes.



OPERATING TEMPERATURES FOR CEA-SERIES GAGES

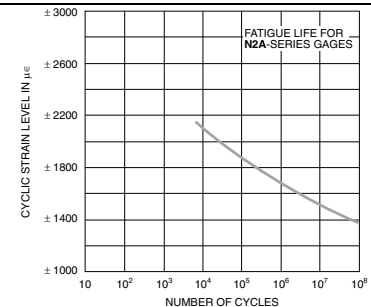
The thermal output of constantan increases rapidly below -50°F [-45°C]. Static measurements become difficult if temperatures are varying.

Positive zero drift of constantan alloy increases significantly above $+150^{\circ}\text{F}$ [$+65^{\circ}\text{C}$] for single active gages in static measurements. Use half-bridge or full-bridge circuits when possible. Stacked rosettes are limited to a maximum operating temperature of $+150^{\circ}\text{F}$ [$+65^{\circ}\text{C}$].



N2A Series

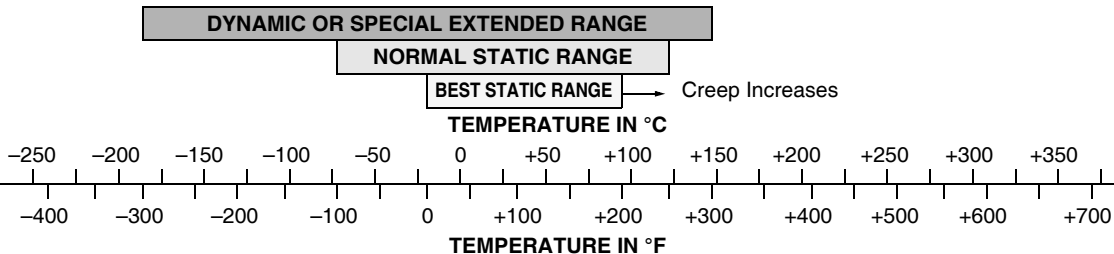
N2A-Series gages are open-faced constantan on a special, thin, laminated polyimide backing. The backing is very flexible and tough. Backing thickness is approximately 0.0008 in [0.020 mm], and the backing has been specially treated for optimum bond formation. The N2A Series has an elongation capability of approximately $\pm 3\%$. These gages are intended for use in elastic strain fields. This series is primarily available for certain large gage patterns because its flatness eases handling.



OPERATING TEMPERATURES FOR N2A-SERIES GAGES

The thermal output of constantan increases rapidly below -50°F [-45°C]. Static measurements become difficult if temperatures are varying.

Positive zero drift of constantan alloy increases significantly above $+150^{\circ}\text{F}$ [$+65^{\circ}\text{C}$] for single active gages in static measurements. Use half-bridge or full-bridge circuits when possible.

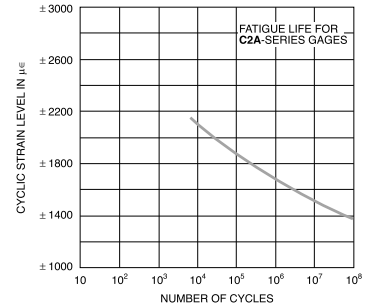


Gage Series - Stress Analysis Gages

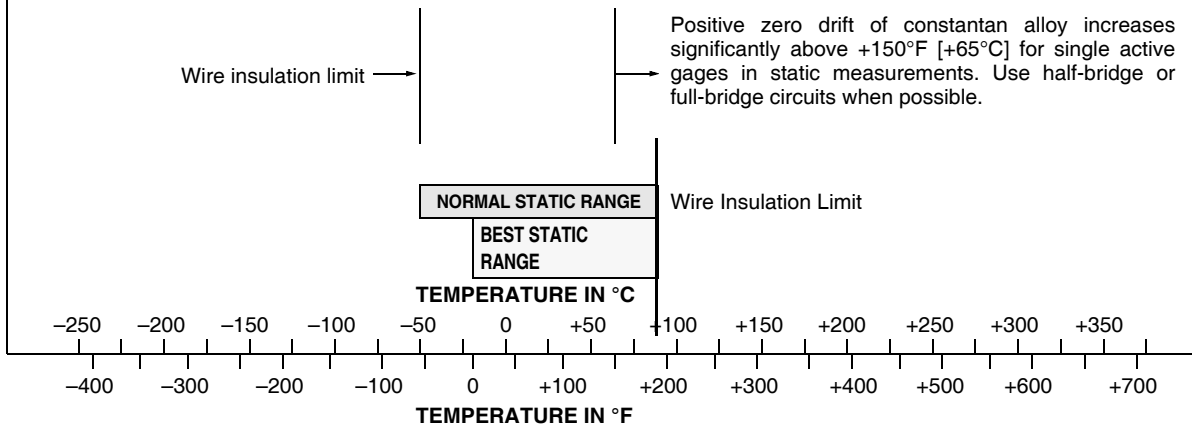
Technical Data

C2A Series

C2A series gages are designed to save time in gage installation. They are fully encapsulated constantan alloy gages with pre-attached 3-conductor instrument cables. Flexible and rugged polyimide film backing and encapsulation allows these gages to be installed on almost any radius. Pre-attached 10-ft [3 m] 26-AWG stranded instrument cable requires no soldering. Economical and easy to install, the C2A series is available in linear, shear, Tee-Rosette and Rectangular Rosette patterns. Nominal gage thickness 0.002 in [0.05 mm]. Jumper wire between gage and instrument cable is 34 AWG single-conductor, polyurethane insulated copper wire 1 in [25 mm] long. Solder used for the connections is +430°F [+220°C] melting point, lead-free type. Strain limits $\pm 3\%$.

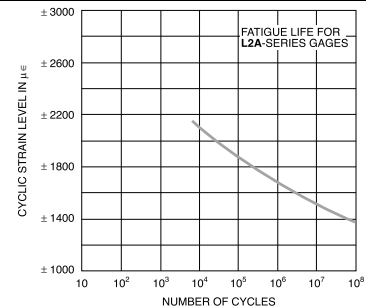


OPERATING TEMPERATURES FOR C2A-SERIES GAGES

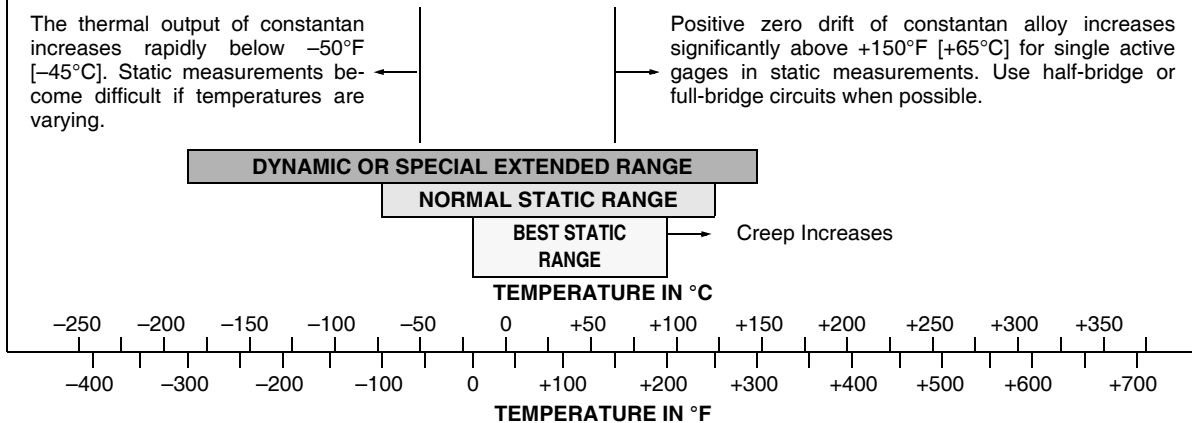


L2A Series

L2A series gages are fully encapsulated constantan alloy gages with pre-attached nickel-clad copper lead ribbons. Flexible and rugged polyimide film backing and encapsulation allows these gages to be installed on almost any radius. Available in linear, shear, Tee-Rosette and Rectangular Rosette patterns, L2A gages are the lowest cost pre-lead gage series, and also save you time in gage installation by eliminating direct soldering on the gage foil. Preattached leads are 1.2 in [30 mm] long, 0.016 in [0.4 mm] wide and 0.002 inch [0.05 mm] thick nickel-clad copper ribbon soldered with +430°F [+220°C] lead-free solder. Nominal gage thickness is 0.002 in [0.05 mm]. Strain limits $\pm 3\%$.



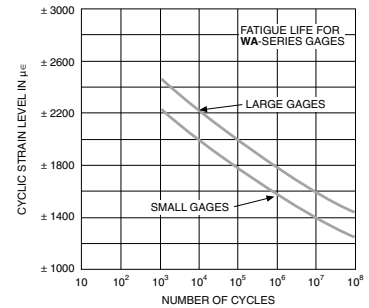
OPERATING TEMPERATURES FOR L2A-SERIES GAGES



Technical Data

WA Series

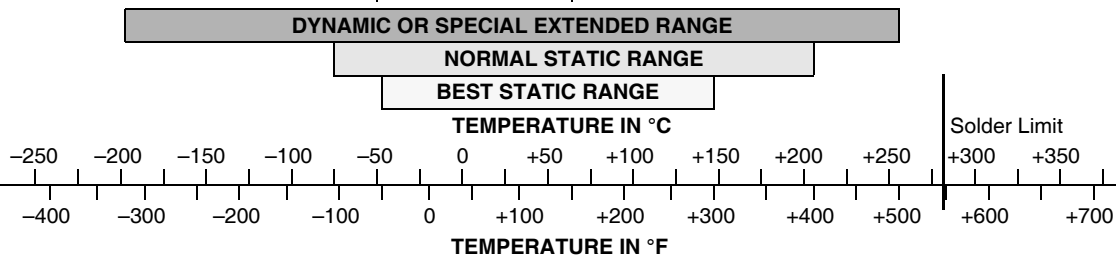
WA-Series gages are fully encapsulated constantan, equipped with integral, high-endurance beryllium copper leadwires. The backing and encapsulation matrix consists of a high-temperature epoxy-phenolic resin system reinforced with glass fibers. Overall gage thickness is approximately 0.0028 in [0.071 mm]. The WA construction provides a gage that is strong and easy to handle, though not as flexible as the EA type. The backing is treated for strong bond formation with all standard strain gage adhesives. The strain range is limited to approximately ± 1 to 2% by the hard, creep-resistant matrix. WA-Series gages are primarily intended for high accuracy measurements over wider temperature ranges and in more difficult environments than other forms of constantan gages. Option W is available on some WA-Series gages, but will restrict the fatigue life to some extent. Heat-curing adhesives such as M-Bond 600 or 610 are recommended when full-temperature-range capabilities are required.



OPERATING TEMPERATURES FOR WA-SERIES GAGES

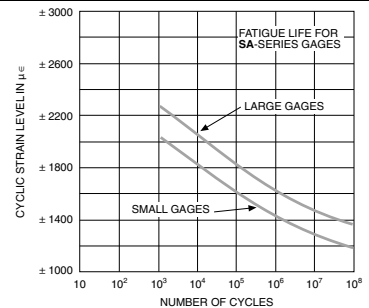
The thermal output of constantan increases rapidly below -50°F [-45°C]. Static measurements become difficult if temperatures are varying.

Positive zero drift of constantan alloy increases significantly above $+150^{\circ}\text{F}$ [$+65^{\circ}\text{C}$] for single active gages in static measurements. Use half-bridge or full-bridge circuits when possible.

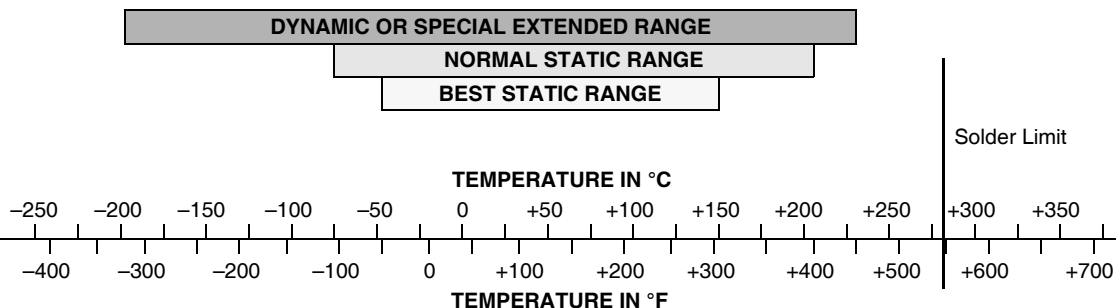


SA Series

SA-Series gages are fully encapsulated constantan similar to WA-Series gages, but with solder dots instead of leadwires. The matrix is somewhat thinner than the WA type, with an overall gage thickness of approximately 0.002 in [0.05 mm]. The solder is a lead-tin-silver alloy which melts at approximately $+570^{\circ}\text{F}$ [$+300^{\circ}\text{C}$]. These gages are typically used in stress analysis applications when mounting space is restricted. The solder dot connections permit small jumper wires to be attached from any direction, and the matrix can be field-trimmed very close to the pattern since no integral leadwires are involved. Because of the exposed solder dots, SA-Series gages are not as well protected in extreme environments as the WA type. The WA Series is superior in maximum temperature capability and fatigue life. No leadwire options are available in this series. Strain limits are approximately ± 1 to 2%. Heat-curing adhesives such as M-Bond 600 or 610 are recommended for full-range performance.



OPERATING TEMPERATURES FOR SA-SERIES GAGES

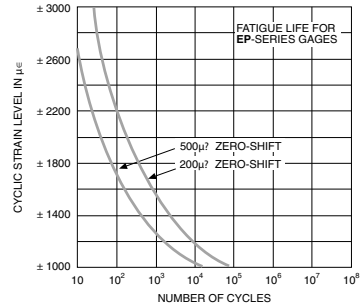


Gage Series - Stress Analysis Gages

Technical Data

EP Series

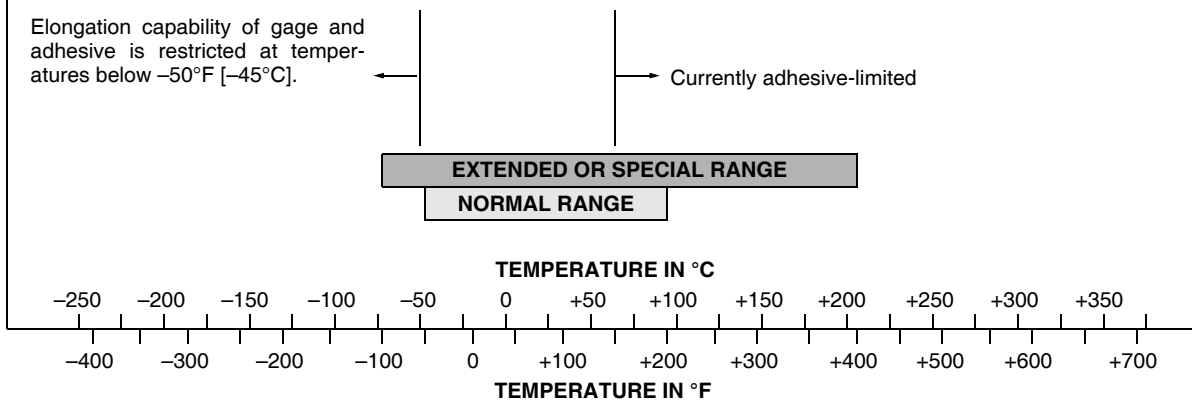
EP-Series gages are specifically designed for use in the measurement of large strains, >3-5%. The basic gage is of open-faced construction on a 0.001 in [0.025 mm] tough, flexible, high-elongation cast polyimide backing. The sensing grid is a special grade of fully annealed constantan foil for maximum ductility. This gage series is available in 08 and 40 compensations, for use on metals and plastic, respectively. Exact values of self-temperature compensation are usually not important in post-yield work because the thermal output error is very small compared to the large strain levels being measured. Strain limits for EP-Series gages are approximately $\pm 20\%$ for gages of 1/8 in [3 mm] or greater gage length, and $\pm 10\%$ for smaller sizes. Optional features generally degrade elongation capabilities. EP-Series gages can be obtained on special order with all options offered on the equivalent EA-Series pattern. M-Bond A-12 adhesive is recommended for full elongation capability.



OPERATING TEMPERATURES FOR EP-SERIES GAGES

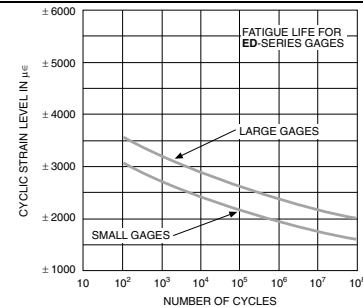
Elongation capability of gage and adhesive is restricted at temperatures below -50°F [-45°C].

Currently adhesive-limited

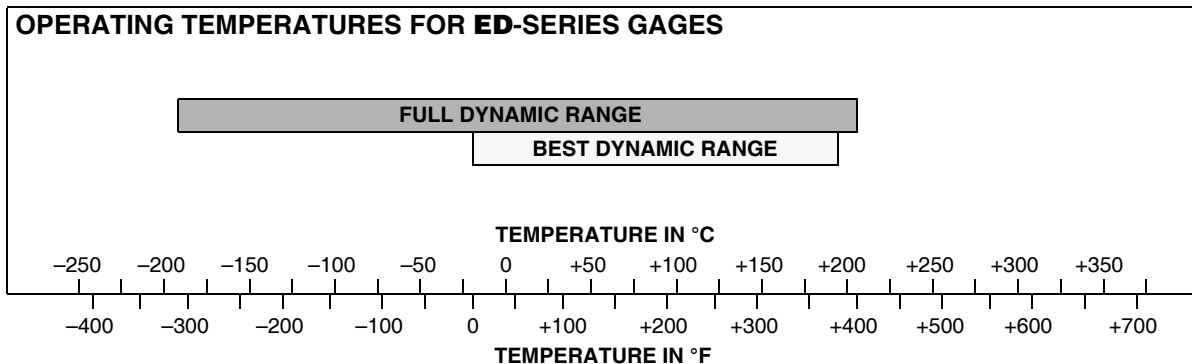


ED Series

ED-Series gages are used in general-purpose dynamic-only strain measurement. They are open-faced construction on a thin, 0.001 in [0.025 mm], tough, flexible cast polyimide backing. The isoelastic grid alloy has a high strain sensitivity, and gage factor is approximately 3.2. The extremely high temperature coefficient of resistance (thermal output of approximately $80\mu\epsilon/^\circ\text{F}$ [$145\mu\epsilon/^\circ\text{C}$]) does not normally permit static measurements to be made with isoelastic gages. The outstanding features of the ED Series are excellent handling properties, high flexibility, good fatigue life, and relatively low cost. A wide range of options is available, covering various forms of lead attachment and protective encapsulation. Leadwires must be handled and installed with care to avoid reduction in fatigue life. All isoelastic gages tend to generate error signals in magnetic fields, since the alloy is both magnetic and magnetostrictive. Strain limits for ED gages are approximately $\pm 1\%$, but increasing nonlinearity above $\pm 5000\mu\epsilon$ normally restricts this type of gage to measurement of dynamic, elastic strain levels.



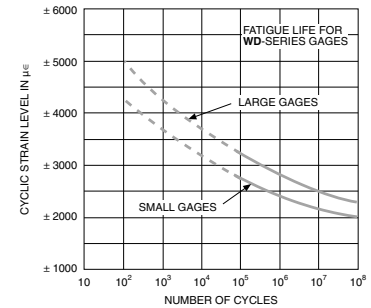
OPERATING TEMPERATURES FOR ED-SERIES GAGES



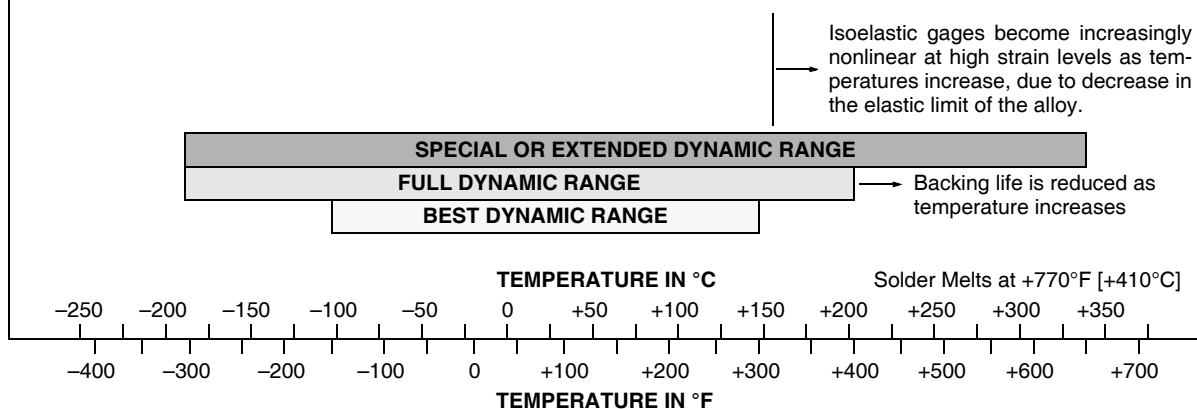
Technical Data

WD Series

WD-Series gages are fully encapsulated isoelastic alloy with integral, high-endurance beryllium copper leadwires. The matrix is a high-temperature epoxy-phenolic resin system reinforced with glass fibers. Overall gage thickness is approximately 0.0028 in [0.071 mm]. These gages are excellent in dynamic strain measurement over wide temperature ranges. The WD Series is considerably less flexible than the ED type, but is useful over a wider temperature range and in more severe environments. The encapsulation matrix and integral high-endurance leadwires provide higher fatigue life than ED-Series gages. No standard options are available. Strain limits for WD-Series gages are approximately $\pm 5000\mu\epsilon$. Heat-curing adhesives such as M-Bond 600 or 610 will provide best overall performance.

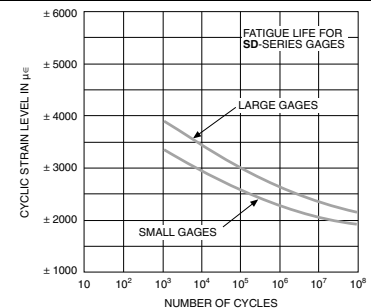


OPERATING TEMPERATURES FOR WD-SERIES GAGES

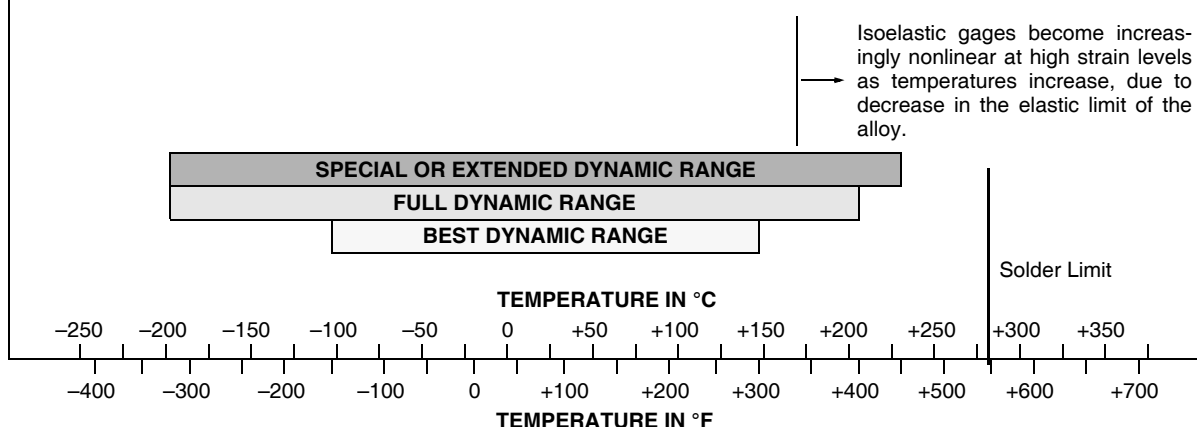


SD Series

SD-Series gages are fully encapsulated isoelastic alloy similar to WD-Series gages, but with solder dots instead of leadwires. The matrix is somewhat thinner than the WD type, with an overall thickness of approximately 0.002 in [0.05 mm]. The solder is a lead-tin-silver alloy which melts at +570°F [+300°C]. The SD Series is primarily used over the WD type when the matrix must be trimmed very close to the gage pattern because of restricted mounting space. There are no integral leadwires to restrict trimming of the lower edge of the matrix, and attachment wires can be routed to the solder dot tabs from any direction. Both maximum operating temperature and fatigue life are somewhat lower than in the WD Series because of the exposed solder dots. Strain limits are approximately $\pm 1\%$, but nonlinearity becomes increasingly severe above $\pm 5000\mu\epsilon$. Heat-curing adhesives such as M-Bond 600 or 610 will provide best overall performance.



OPERATING TEMPERATURES FOR SD-SERIES GAGES

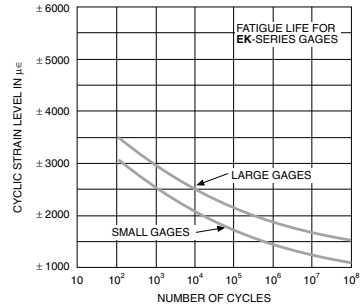


Gage Series - Stress Analysis Gages

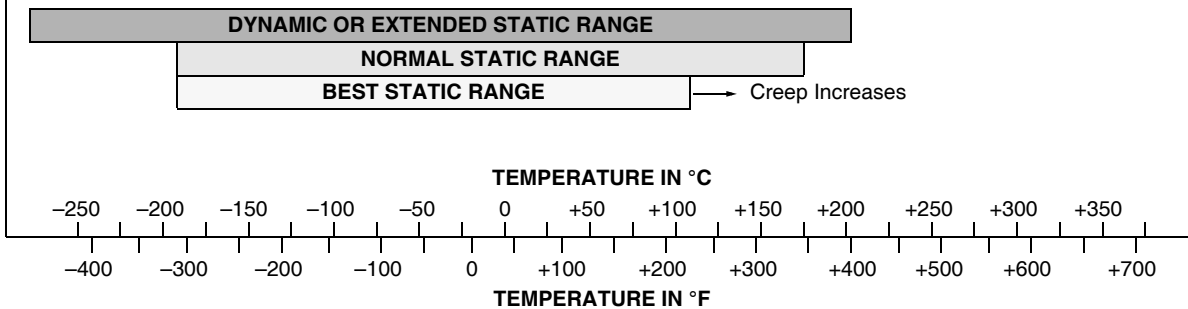
Technical Data

EK Series

EK-Series gages are K alloy, often employed in general-purpose testing where higher resistances and grid stability are required, particularly at elevated temperatures. They are normally selected for applications where reinforced laminate-backed gages lack sufficient flexibility. EK gages are of open-faced construction on a 0.001 in [0.025 mm] tough, flexible cast polyimide backing. The strong, heat-resistant backing provides excellent handling and performance qualities, and is treated for good bond formation with all standard strain gage adhesives. Heat-curing adhesives such as M-Bond 610 are recommended for full-temperature-range capabilities. Strain limits for this series are approximately $\pm 1.5\%$. EK gages are often selected instead of EA gages for improved fatigue life. However, when maximum fatigue life is required, reinforced laminate-backed K-alloy gages are recommended. Soldering to K-alloy is difficult, and duplex copper pads or dots are included as a standard feature. Most options available on EA-Series gages are offered with EK gages, but performance may be degraded.

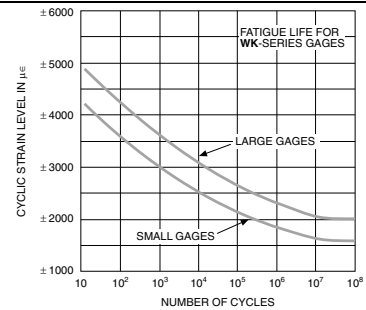


OPERATING TEMPERATURES FOR EK-SERIES GAGES



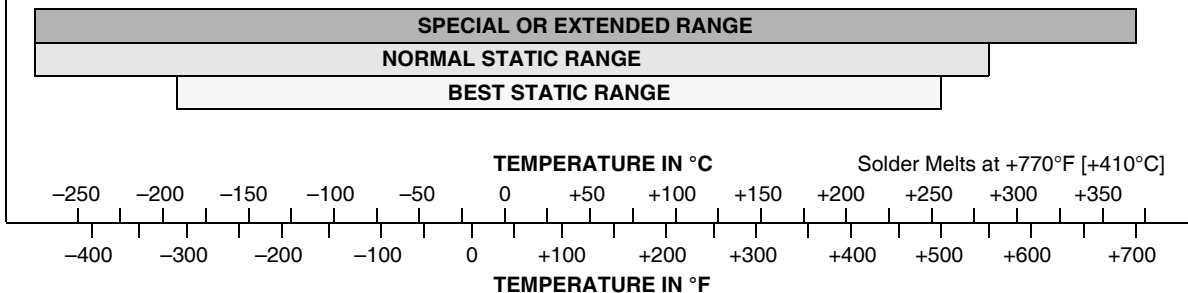
WK Series

WK-Series gages are fully encapsulated K alloy, equipped with integral, high-endurance beryllium copper leadwires. The matrix is a high-temperature epoxy-phenolic resin system reinforced with glass fibers. Overall gage thickness is approximately 0.0028 in [0.071 mm]. WK-Series gages have the widest temperature range and most extensive environmental capability of any general purpose strain gage of the self-temperature-compensated type. Option W is available on many pattern designs, but will lower the excellent cyclic endurance and maximum operating temperature of the basic WK gage. Elevated temperature drift of these gages is very low to $+600^{\circ}\text{F}$ [$+315^{\circ}\text{C}$], and the main restriction at high temperatures is the limited life of the backing and adhesive due to oxidation and sublimation. Strain limits for WK gages are approximately $\pm 1.5\%$. High temperature adhesives such as M-Bond 610 are required for full-range performance.



OPERATING TEMPERATURES FOR WK-SERIES GAGES

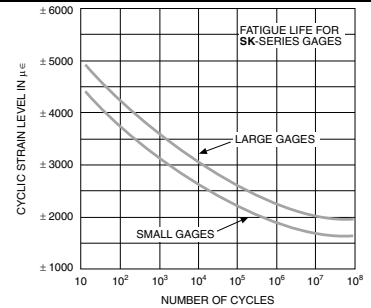
Typical backing and adhesive life in hours at temperatures indicated below	INERT GAS	5×10^5	5×10^4	300	10
	AIR		10^5	10^4	150



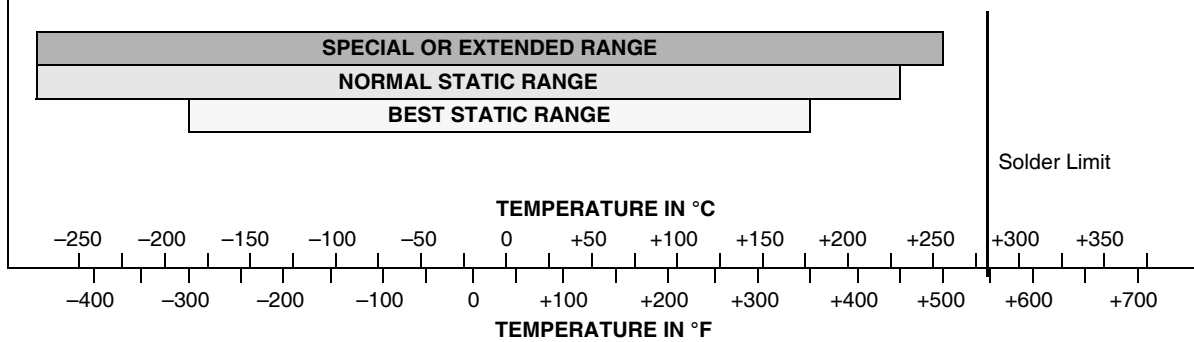
Technical Data

SK Series

SK-Series gages are fully encapsulated similar to the WK-Series gages, but with solder dots instead of leadwires. The matrix is somewhat thinner than the WK type, with an overall thickness of approximately 0.002 in [0.05 mm]. The solder is a lead-tin-silver alloy which melts at approximately +570°F [+300°C]. SK gages are primarily used when mounting space is restricted. Performance is equivalent to the WK type, but over a lower temperature range. Fatigue life of the SK Series is equivalent to the WK type, but more care is required during leadwire attachment to avoid gage damage. The absence of integral leadwires allows SK gages to be field-trimmed very close to the pattern size. No leadwire options are available. Strain limits are approximately ±1.5%. Heat-curing adhesives such as M-Bond 610 will provide best overall performance.

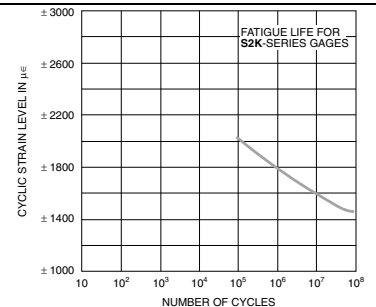


OPERATING TEMPERATURES FOR SK-SERIES GAGES

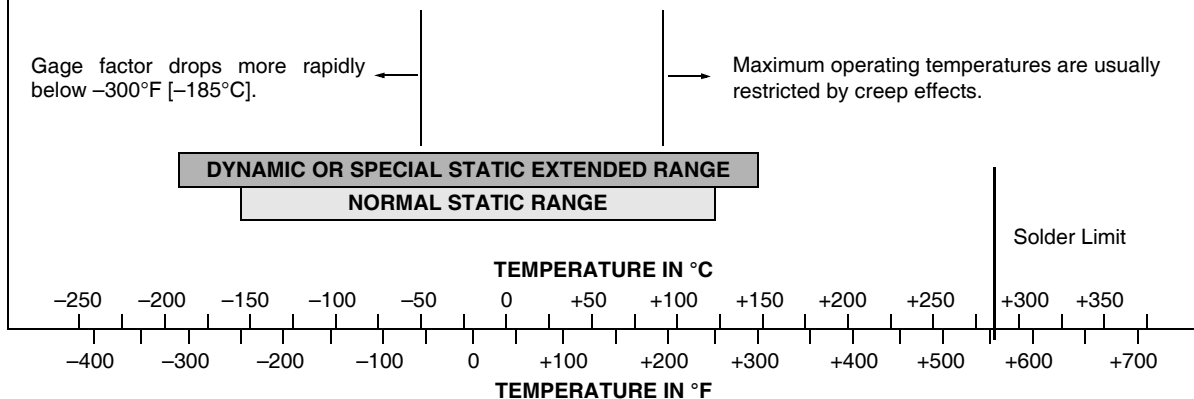


S2K Series

S2K-Series gages are fully encapsulated K alloy, equipped with large integral solder dots. The backing and encapsulation are 0.001 in [0.025 mm] thick laminated high-performance polyimide. The overlay fully encapsulates the grid and solder tabs. Large (0.030 in [0.75 mm]) diameter solder pads are provided for ease of leadwire attachment. Overall gage thickness is approximately 0.0025 in [0.065 mm] and the backing has been specially treated for optimum bond formation. M-Bond 43-B is recommended for S2K-Series gages if a cure temperature of +350°F [+175°C] is possible. Alternatively, M-Bond AE-10/15, M-Bond 200, or M-Bond 600/610 may be used. The S2K Series has an elongation capability exceeding ±1.5%. Designed primarily for use on composites, these gages are normally produced in larger patterns and higher resistances.



OPERATING TEMPERATURES FOR S2K-SERIES GAGES



Technical Data

OPTIONAL FEATURES

Micro-Measurements offers a wide selection of optional features for its general-purpose strain gages and special-purpose sensors. The addition of options to the basic gage construction usually increases the cost, but this is generally offset by the benefits. Examples are:

- Significant reduction of installation time and costs.
- Reduction of the skill level necessary to make dependable installations.
- Increased reliability of applications.

- Simplified installation of sensors in difficult locations on components or in the field.
- Increased protection, both in handling during installation and shielding from the test environment.
- Achievement of special performance characteristics.

Availability of each option varies with gage series and pattern. Standard options are noted for each sensor in the product listing.

Shown below is a summary of the optional features offered. Detailed descriptions will be found on the following pages.

STANDARD OPTIONS

The optional features shown below are considered standard when they are listed with the gage series and pattern in the General-Purpose Strain Gage Listings.

OPTION	BRIEF DESCRIPTION	AVAILABLE ON GAGE SERIES
W	Integral Terminals and Encapsulation	As shown in General-Use Strain Gage Listings
E	Encapsulation with Exposed Tabs	
SE	Solder Dots and Encapsulation	
L	Preattached Leads	
LE	Preattached Leads and Encapsulation	
P	Preattached Leadwire Cables and Encapsulation	
P2	Preattached Leadwire Cables for CEA-Series Gages	Special order required
R	Individually Furnished Resistance Value	
S	Solder Dots	
W3	Special Terminals	

If the option desired is not shown in the Strain Gage Listings, it may be available as a special order. Please contact our Applications Engineering Department for specific information.

SPECIAL OPTIONS




The following applies to Special Options:

1. Availability will depend on the specific gage series and pattern.
2. A quotation is required and can be requested from our Customer Service Department.
3. A minimum order quantity may be required.
4. Whenever more than one Special Option is required, a custom part number will be assigned to the gage/option combination.

OPTION	BRIEF DESCRIPTION	AVAILABLE ON GAGE SERIES
SP-11-14	Single Batch of Foil per Order	All
SP21-24	'Modulus-Compensating' Foil	EK, WK, SK, S2K
SP30	Round Ni-Clad Copper Leads	EA, WA, ED, WD, EK, WK, EP
SP60	Special Encapsulation	Only on Manganin Gages
SP61	Preattached Leads and Encapsulation	N2A, N2P
SP81	Special Customer-Specified Information Added to Engineering Data Sheet	All


Note 1: Products with designations and options shown in bold are not RoHS compliant.


Technical Data

OPTION W	SERIES AVAILABILITY: EA, EP, WA, ED, WD, EK, WK	
<p>General Description: This option provides encapsulation, and thin, printed circuit terminals at the tab end of the gage. Beryllium copper jumpers connect the terminals to the gage tabs. The terminals are 0.0014 in [0.036 mm] thick copper on polyimide backing nominally 0.0015 in [0.038 mm] thick. Option W gages are rugged and well protected, and permit the direct attachment of larger leadwires than would be possible with open-faced gages. This option is primarily used on EA-Series gages for general-purpose applications. Solder: +430°F [+220°C] tin-silver alloy solder joints on E-backed gages, +570°F [+300°C] lead-tin-silver alloy solder joints on W-backed gages. Temperature Limit: +350°F [+175°C] for E-backed gages, +450°F [+230°C] for W-backed gages. Grid Protection: Entire grid and part of terminals are encapsulated with polyimide. Fatigue Life: Some loss in fatigue life unless strain levels at the terminal location are below $\pm 1000\mu\epsilon$. Size: Option W extends from the soldering tab end of the gages and thereby increases gage size. With some patterns, width is slightly greater. Strain Range: With some gage series, notably E-backed gages, strain range will be reduced. This effect is greatest with EP gages, and Option W should be avoided with them if possible. Flexibility: Option W adds encapsulation, making gages slightly thicker and stiffer. Conformance to curved surfaces will be somewhat reduced. In the terminal area itself, stiffness is markedly increased. Resistance Tolerance: On E-backed gages, resistance tolerance is normally doubled.</p>		
OPTION E	SERIES AVAILABILITY: EA, ED, EK, EP	
<p>General Description: Option E consists of a protective encapsulation of polyimide film approximately 0.001 in [0.025 mm] thick. This provides ruggedness and excellent grid protection, with little sacrifice in flexibility. Soldering is greatly simplified since the solder is prevented from tinning any more of the gage tab than is deliberately exposed for lead attachment. Option E protects the grid from fingerprints and other contaminating agents during installation and, therefore, contributes significantly to long-term gage stability. Heavier leads may be attached directly to the gage tabs for simple static load tests. Supplementary protective coatings should still be applied after lead attachment in most cases. Temperature Limit: No degradation. Grid Protection: Entire grid and part of tabs are encapsulated. Fatigue Life: When gages are properly wired with small jumpers, maximum endurance is easily obtained. Size: Gage size is not affected. Strain Range: Strain range of gages will be reduced because the additional reinforcement of the polyimide encapsulation can cause bond failure before the gage reaches its full strain capability. Flexibility: Option E gages are almost as conformable on curved surfaces as open-faced gages, since no internal leads or solder are present at the time of installation. Resistance Tolerance: Resistance tolerance is normally doubled when Option E is selected.</p>		
OPTION SE	SERIES AVAILABILITY: EA, ED, EK, EP	
<p>General Description: Option SE is the combination of solder dots on the gage tabs with a 0.001 in [0.025 mm] polyimide encapsulation layer that covers the entire gage. The encapsulation is removed over the solder dots providing access for lead attachment. These gages are very flexible, and well protected from handling damage during installation. Option SE is primarily intended for small gages that must be installed in restricted areas, since leadwires can be routed to the exposed solder dots from any direction. The option does not increase overall gage dimensions, so the matrix may be field-trimmed very close to the actual pattern size. Option SE is sometimes useful on miniature transducers of medium- or low-accuracy class, or in stress analysis work on miniature parts. Solder: +570°F [+300°C] lead-tin-silver alloy. To prevent loss of long-term stability, gages with Option SE must be soldered with noncorrosive (rosin) flux, and all flux residue should be carefully removed with M-LINE Rosin Solvent after wiring. Protective coatings should then be used. Temperature Limit: No degradation. Grid Protection: Entire gage is encapsulated. Fatigue Life: When gages are properly wired with small jumpers, maximum endurance is easily obtained. Size: Gage size is not affected. Strain Range: Strain range of gages will be reduced because the additional reinforcement of the polyimide encapsulation can cause bond failure before the gage reaches its full strain capability. Flexibility: Option SE gages are almost as conformable on curved surfaces as open-faced gages. Resistance Tolerance: Resistance tolerance is normally doubled when Option SE is selected.</p>		

Optional Features - Stress Analysis Gages

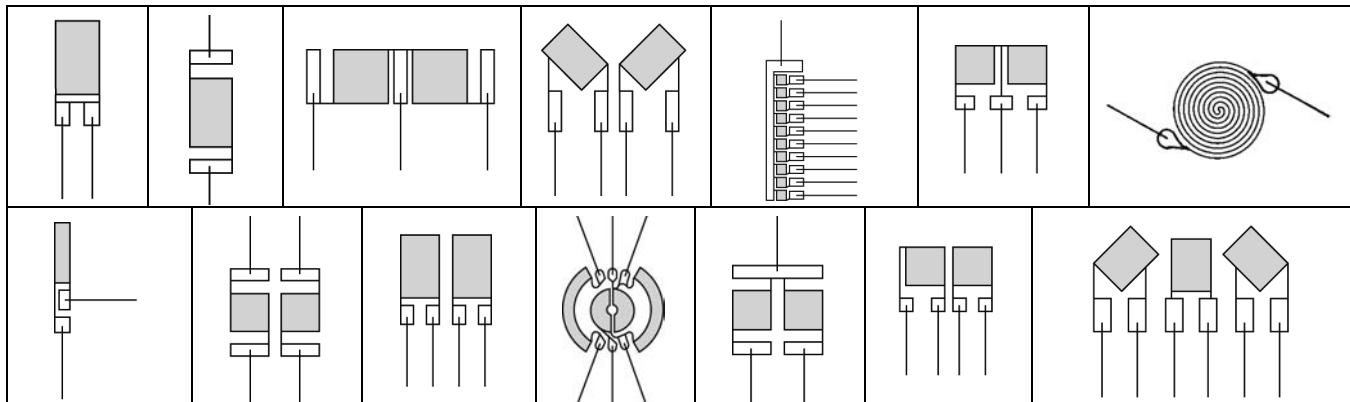
Technical Data

OPTION L	SERIES AVAILABILITY: EA, ED, EK, EP	
<p>General Description: Option L is the addition of soft copper lead ribbons to open-faced polyimide-backed gages. The use of this type of ribbon results in a thinner and more conformable gage than would be the case with round wires of equivalent cross section. At the same time, the ribbon is so designed that it forms almost as readily in any desired direction. Leads: Nominal ribbon size for most gages is 0.012 wide x 0.004 in thick [0.30 x 0.10 mm]. Leads are approximately 0.8 in [20 mm] long. Solder: +430°F [+220°C] tin-silver alloy. Temperature Limit: +400°F [+200°C]. Fatigue Life: Fatigue life will normally be degraded by Option L. This occurs primarily because the copper ribbon has limited cyclic endurance. When it is possible to carefully dress the leads so that they are not bonded in a high strain field, the performance limitation will not apply. Option L is not often recommended for very high endurance gages such as the ED Series. Size: Matrix size is unchanged. Strain Range: Strain range will usually be reduced by the addition of Option L. Flexibility: Gages with Option L are not as conformable as standard gages. Resistance Tolerance: Not affected.</p>		

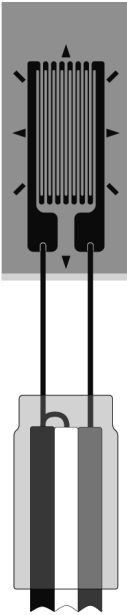
OPTION LE	SERIES AVAILABILITY: EA, ED, EK, EP	
<p>General Description: This option provides the same conformable soft copper lead ribbons as used in Option L, but with the addition of a 0.001 in [0.025 mm] thick encapsulation layer of polyimide film. The encapsulation layer provides excellent protection for the gage during handling and installation. It also contributes greatly to environmental protection, though supplementary coatings are still recommended for field use. Gages with Option LE will normally show better long-term stability than open-faced gages which are “waterproofed” only after installation. A good part of the reason for this is that the encapsulation layer prevents contamination of the grid surface from fingerprints or other agents during handling and installation. The presence of such contaminants will cause some loss in gage stability, even though the gage is subsequently coated with protective compounds. Leads: Nominal ribbon size for most gages is 0.012 wide x 0.004 in thick [0.30 x 0.10 mm] copper ribbons. Leads are approximately 0.8 in [20 mm] long. Solder: +430°F [+220°C] tin-silver alloy. Temperature Limit: +400°F [+200°C]. Grid Protection: Entire gage is encapsulated. A short extension of the backing is left uncovered at the leadwire end to prevent contact between the leadwires and the specimen surface. Fatigue Life: Fatigue life will normally be degraded by Option LE. This occurs primarily because the copper ribbon has limited cyclic endurance. Option LE is not often recommended for very high endurance gages such as the ED Series. Size: Matrix size is unchanged. Strain Range: Strain range will usually be reduced by the addition of Option LE. Flexibility: Gages with Option LE are not as conformable as standard gages. Resistance Tolerance: Resistance tolerance is normally doubled by the addition of Option LE.</p>		


LEADWIRE ORIENTATION FOR OPTIONS L AND LE

These illustrations show the standard orientation of leadwires relative to the gage pattern geometry for Options L and LE. The general rule is that the leads are parallel to the longest dimension of the pattern. The illustrations also apply to leadwire orientation for WA-, WK- and WD-Series gages, when the pattern shown is available in one of these series.



Technical Data

OPTION P	SERIES AVAILABILITY: EA, N2A	
<p>General Description: Option P is the addition of preattached leadwire cables to many patterns of EA-Series strain gages. Encapsulation seals small “jumper” leadwires at gage end, and cable insulation protects solder joints at cable end. Option P virtually eliminates need for soldering during gage installation.</p> <p>Leads: A pair of 1 in [25 mm] M-LINE 134-AWP (solid copper, polyurethane enamel) single conductor “jumper” leadwires. Cable: 10 ft [3.1 m] of color-coded, flat, three-conductor 26-gauge [0.404 mm dia.], stranded, tinned copper with vinyl insulation (similar to M-LINE 326-DFV). Solder: +430°F [+220°C] tin-silver alloy solder joints, “jumper” to gage. Cable conductors and “jumpers” joined with +361°F solder beneath cable insulation. Exposed leadwires on unattached end of cable are pretinned for ease of hookup.</p> <p>Temperature Limit: -60° to +180°F [-50° to +80°C]; limited by vinyl insulation on cable. Grid Encapsulation: Entire grid and tabs are encapsulated. Fatigue Life: Fatigue life will normally be degraded by Option P, primarily because the copper “jumper” wires have limited cyclic endurance. Pattern Availability: Most EA-Series single-grid patterns that are 0.062 in [1.5 mm] or greater gage length, with parallel solder tabs on one end of the grid, and suitable for encapsulation. (Consult our Applications Engineering Department for availability of Option P on other gage series/patterns, and for nonstandard cable lengths.) Size: Matrix size is unchanged. Strain Range: Strain range will usually be reduced by the addition of Option P. Flexibility: E-backed gages with Option P are not as conformable as standard gages. Resistance Considerations: Each conductor of the cable has a nominal resistance of 0.04 ohm/ft [0.13 ohm/m]. Gage resistance is measured at gage tabs. Gage Factor: Gage factor is determined for gages without preattached cable. Resistance Tolerance: Resistance tolerance is normally ±0.5% for single-element gages, and ±0.6% for multiple-grid gages.</p>		

OPTION P2	SERIES AVAILABILITY: CEA	
<p>General Description: Option P2 is the addition of preattached leadwire cables to CEA-Series strain gages. Option P2 virtually eliminates need for soldering during gage installation. Cable: 10 ft [3.1 m] of color-coded, flat, three-conductor 30-gauge [0.255 mm], stranded, tinned copper with vinyl insulation (similar to M-LINE 330-DFV). Solder: +361°F [+180°C] tin-lead alloy solder joints. Exposed leadwires on unattached end of cable are pretinned for ease of hookup. Temperature Limit: -60° to +180°F [-50° to +80°C]; limited by vinyl insulation on cable. Grid Encapsulation: Entire grid is encapsulated. (Solder tabs are not encapsulated.) Fatigue Life: Fatigue life will normally be unchanged by Option P2. Pattern Availability: Most CEA-Series single- and multiple-grid patterns. Size: Matrix size is unchanged. Strain Range: Standard for CEA-Series gages. Flexibility: No appreciable increase in stiffness. Resistance Considerations: Each conductor of the cable has a nominal resistance of 0.1 ohm/ft [0.35 ohm/m]. Gage resistance is measured at gage tabs. Gage Factor: Gage factor is determined for gages without preattached cable. Resistance Tolerance: Not affected.</p>		

OPTION S	SERIES AVAILABILITY: EA, ED, EP
<p>Precisely formed hemispherical solder dots are installed in the center of each solder tab. This feature facilitates soldering by providing a pretinned area for lead attachment. A film of adhesive or appropriate protective coating is normally applied over the gage before soldering, and this prevents the solder from spreading on the tab when leads are reinstalled. After the top coating has been cured, the solder dot is easily exposed for soldering by scraping with a scalpel or by simply post-tinning. Solder used for the dots is +570°F [+300°C] lead-tin-silver alloy. Dot diameter varies somewhat with tab size but is usually about 0.02 in [0.5 mm]. Temperature limit for this feature is +500°F [+260°C]. Because the solder dots result in much greater soldering uniformity, the variable fatigue life factor, which results from excessive solder on the gage tabs, is eliminated. Solder dots are small and interfere very little with flexibility and conformability of strain gages.</p>	

OPTION W3	SERIES AVAILABILITY: EA, EP, WA, ED, EK, WK
<p>This feature is identical to Standard Catalog Option W, except that the printed circuit wiring terminals have three solder pads, two of which are electrically common. These terminals facilitate the connection of three-conductor cable for single active gage circuits using the three-wire lead system. Many of the gage patterns which are marked as available with Option W in the General-Purpose Strain Gage Listings are available with three-pad terminals.</p>	

Technical Data

OPTION R	SERIES AVAILABILITY: ALL
<p>The resistance of each gage is separately measured with an accurate digital ohmmeter and the exact value is recorded on the transparent folder that contains the gage. Resistance is given to the nearest 0.01 ohm, and the overall absolute accuracy is $\pm 0.05\%$ or better for gages of 60-ohm or greater resistance; thus allowing the user to select gages very closely matched in resistance from the total group of gages purchased. The necessary order quantity can be estimated for any matching requirements by assuming an even distribution of resistance values through the tolerance band, which is unchanged. Note: This feature is less effective for open-faced gages without leadwires or solder dots because of the uncertainty in leadwire position on the tabs with user-installed leadwires.</p>	

SPECIAL OPTIONS

OPTION SP11, 12, 13, 14	SERIES AVAILABILITY: ALL
<p>These options specify that all sensors are supplied from a single process batch and lot of foil. They are primarily used to obtain the closest possible matching of performance characteristics from a large group of gages.</p> <p>SP11: One sensor type from a single batch of processed foil</p> <p>SP12: Two sensor types from a single batch of processed foil</p> <p>SP13: Three sensor types from a single batch of processed foil</p> <p>SP14: Four sensor types from a single batch of processed foil</p>	

OPTION SP21, 22, 23, 24	SERIES AVAILABILITY: EK, WK, SK, S2K			
<p>This option series provides strain gages with 'Modulus Compensation' features through use of specially modified lots of K alloy. The 'Mod-Comp' match will be quite close for the materials specified, although thermal output characteristics may not be ideal.</p>				
<p>When force-responsive type transducers are manufactured from the metals listed, and the appropriate Special Option gages are used, the result is a transducer which demonstrates very little span change with temperature.</p>	NOMINAL GAGE FACTOR SLOPE			
	OPTION	%/100°F	%/100°C	FOR USE ON
	SP21	-1.50	-2.70	Stainless Steels
	SP22	-2.35	-4.25	Aluminum
	SP23	-1.25	-2.25	Tool Steels
SP24	-1.35	-2.45	Tool Steels	

OPTION SP30	SERIES AVAILABILITY: EA, WA, ED, WD, EK, WK, EP		
<p>General Description: This option consists of special leadwires, either added to open-faced gages, or substituted for lead ribbons on WA-, WK-, or WD-Series gages. The wire is very formable, and may be spot-welded or soldered to main leadwires. The primary advantages are easy handling and excellent resistance to oxidation at the highest temperatures the gages can withstand. Leads: 0.8 in [20 mm] long nickel-clad copper wires 0.005 in [0.13 mm] diameter. For some gage types, usually small patterns, wire size must be reduced to 0.0035 in [0.09 mm] diameter. Solder: EA-, ED-, EK-, EP-Series gages: +430°F [+220°C] tin-silver alloy; WA-Series gages: +570°F [+300°C] lead-tin-silver alloy; WK- and WD-Series gages: +770°F [+410°C] solder. Temperature Limit: E-backed gages: +400°F [+200°C]; WA-Series gages: +500°F [+260°C]; WK- and WD-Series gages: +750°F [+400°C]. Fatigue Life: Fatigue life will normally be degraded by Option SP30. This occurs primarily because the copper wire has limited cyclic endurance. Option SP30 should therefore not be used when best fatigue life is required, unless the tab area of the gage is in a low strain area ($\pm 1000\mu\epsilon$ or less). Loss of cyclic endurance is experienced particularly with WA-, WK-, and WD-Series gages. Size: Matrix size is unchanged. On W-backed gages, SP30 leads are substituted for the normal beryllium copper ribbon leads. One wire lead per tab is supplied. Strain Range: Option SP30 normally reduces the strain range of E-backed gages but does not similarly affect W-backed gages. Flexibility: E-backed gages with SP30 leads are not as conformable as standard gages. W-backed gages are not affected. Resistance Tolerance: Not affected.</p>			

Technical Data

OPTION SP60	SERIES AVAILABILITY: ONLY ON MANGANIN GAGES
<p>SP60 is an encapsulation option available for L-backed manganin gages. The end of each tab includes a thin copper coating that is left exposed for lead attachment.</p>	

OPTION SP61	SERIES AVAILABILITY: N2A, N2P
<p>General Description: This option provides conformable, soft copper lead ribbons and a 0.0005 in [0.013 mm] thick encapsulation layer of polyimide film. The encapsulation layer provides excellent protection for the gage during handling and installation. It also contributes greatly to environmental protection, though supplementary coatings are still recommended for field use. Gages with Option SP61 will normally show better long-term stability than open-faced gages which are “waterproofed” only after installation. A good part of the reason for this is that the encapsulation layer prevents contamination of the grid surface from fingerprints or other agents during handling and installation. The presence of such contaminants will cause some loss in gage stability, even though the gage is subsequently coated with protective compounds. Leads: 0.010 wide x 0.002 in thick [0.25 x 0.05 mm] soft copper ribbons. Leads are approximately 0.8 in [20 mm] long. Solder: +430°F [+220°C] tin-silver alloy. The solder is confined to small, well-defined areas at the end of each ribbon. Temperature Limit: +400°F [+200°C]. Grid Protection: Entire gage is encapsulated. A short extension of the backing is left uncovered at the leadwire end to prevent contact between the leadwires and the specimen surface. Size: Matrix size is unchanged. Strain Range: Strain range will usually be reduced by the addition of Option SP61. Flexibility: Gages with Option SP61 are not as conformable as standard gages. Resistance Tolerance: Resistance tolerance is normally doubled by the addition of Option SP61.</p>	

OPTION SP81	SERIES AVAILABILITY: ALL
<p>When special packaging identification is required, Option SP81 must be specified. A maximum of three (3) lines of up to fourteen (14) characters each may be included in the format shown to the right. When specifying SP81, the purchase order must show the information to be printed.</p>	<pre>XXXXXXXXXXXXXXXXX XXXXXXXXXXXXXXXXX XXXXXXXXXXXXXXXXX</pre>

www.vishaypg.com



Data Book

Precision Strain Gages Micro-Measurements

www.micro-measurements.com

Where the World Goes
for Precision Measurement and Control

© Copyright 2010 Vishay Precision Group. ® Registered trademarks of Vishay Precision Group.
All rights reserved. Printed in USA. Specifications subject to change without notice.

VMM-DB0103-1011